



300Mbps Wireless N Access Point

Easy Network Expansion
with N300 Wi-Fi

TL-WA801ND



300Mbps 2.4GHz



Passive PoE



5dBi Antennas

Highlights

Reliable Wi-Fi for Home Entertainment

With the use of 2×2 MIMO intelligent antenna technology, TL-WA801ND reaches speeds of up to 300Mbps, the maximum speed available on 2.4GHz single band, working smoothly with almost any bandwidth intensive applications including VoIP, HD streaming, or online gaming, without any lag.



Passive PoE Supported

TL-WA801ND is able to be powered using an Ethernet cable to simultaneously send data and electricity to wherever your AP may be located even up to 100 feet away. This feature multiplies your options allowing you to place the AP in a position that is most convenient to get the best signal possible, such as on a wall or on the ceiling of your office.



Features



Ease of Use

- Intuitive Web UI – Ensure quick and simple Installation without hassle
- Fast Encryption – One-touch WPA wireless security encryption with the WPS button
- Power On/Off – Conveniently power on or off your router as required
- Hassle-free Management with Tether App – Network management is made easy with the TP-Link Tether App, available on any Android and iOS device



Reliability

- Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Easy Bandwidth Management – Advanced QoS makes it easier for you to manage the bandwidth of connected devices




Speed

- Ultimate Wireless Speed – Wireless speeds up to 300Mbps on 2.4GHz
- Fast Ethernet Port – Acts as a wireless adapter to connect wired devices

Specifications

Hardware

- Ethernet Port: 1 10/100Mbps LAN Port
- Buttons: Power On/Off Button, WPS Button, RESET Button
- Antennas: 2 Detachable Omni-Directional Antennas
- External Power Supply: 9VDC/0.6A
- Dimensions (W x D x H): 181×126×36mm

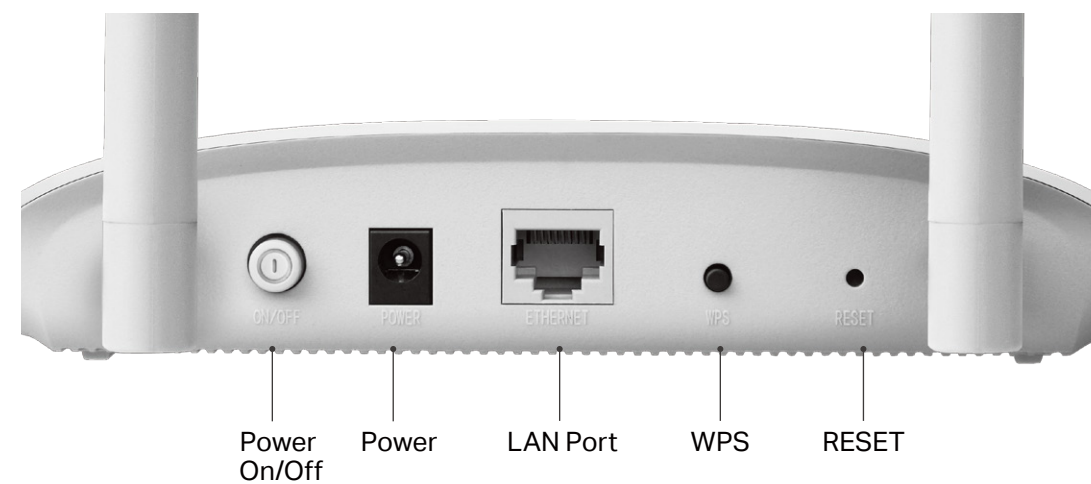

Wireless

- Wireless Standards: IEEE 802.11b/g/n
- Frequency: 2.4GHz
- Signal Rate: 300Mbps at 2.4GHz
- Transmit Power:
CE: <15dBm; FCC: <20dBm
- Reception Sensitivity:
11g 54M: -76dBm
11n 20Mbps: -73dBm
11n 40Mbps: -70dBm
- Wireless Function: Enable/Disable Wireless Radio, WMM, Wireless Statistics
- Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryptions

Specifications

Software

- Quality of Service: WMM
- DHCP: Server, DHCP Client List, Address Reservation
- Wireless Modes: Access Point, Repeater/Bridge, Client, Multi-SSID
- System Tools: SNMP, Ping Watch Dog

Others

- Certification:
CE, FCC, RoHS
- System Requirements:
Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

Cable or DSL Modem

Subscription with an Internet Service Provider (for Internet access)
- Environment:
Operating Temperature: 0°C~40°C (32°F ~104°F)
Storage Temperature: -40°C~70°C (-40°F ~158°F)
Operating Humidity: 10%~90% non-condensing
Storage Humidity: 5%~90% non-condensing
- Package Contents
300Mbps Wireless N Access Point TL-WA801ND
2 detachable antennas
Power Supply Unit
Ethernet Cable
Quick Installation Guide



For more information, please visit

<http://www.tp-link.com/en/products/details/TL-WA801ND.html>

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

TP-Link Technologies Co., Ltd.

Building 24 (floors 1, 3, 4, 5) and 28 (floors 1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

www.tp-link.com

www.tp-link.com

TP-Link 300Mbps Wireless N Access Point TL-WA801ND