TP-LINK®
The Reliable Choice
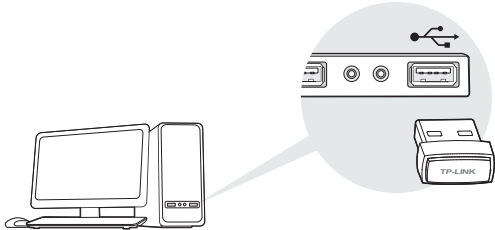
EAC

Quick
Installation Guide

AC450 Wireless Nano USB Adapter
MODEL NO. Archer T1U

---

1 Connect to a Computer

Insert the adapter into a USB port on your computer directly.

Note: In Windows XP, a **Found New Hardware Wizard** window will appear when the adapter is detected. Please click **Cancel**.

---

2 Install Driver and Utility

You can also download the driver and utility at **www.tp-link.com**.
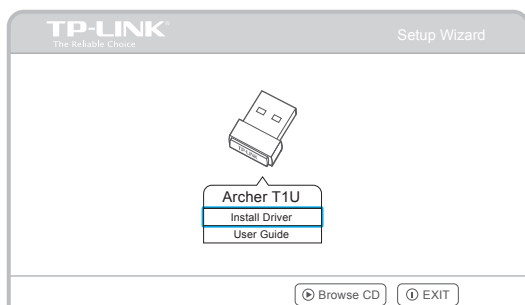
① Insert the CD.

② **For Windows**

Run the **Autorun.exe** on the pop-up window.

Select **Archer T1U** and click **Install Driver**, then follow the InstallShield Wizard to complete the installation.
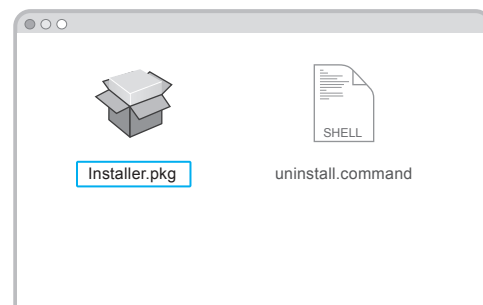
Note: The default setup type is **Install Driver Only**. You can later change to **Install TP-LINK Wireless Configuration Utility and Driver** for more functions.

For Mac OS X

Browse the CD, go to **Archer T1U** > **Mac OS X Driver**.
Double-click the TP-LINK_Installer.dmg file and run the **Installer.pkg**.
Follow the wizard to complete the installation.

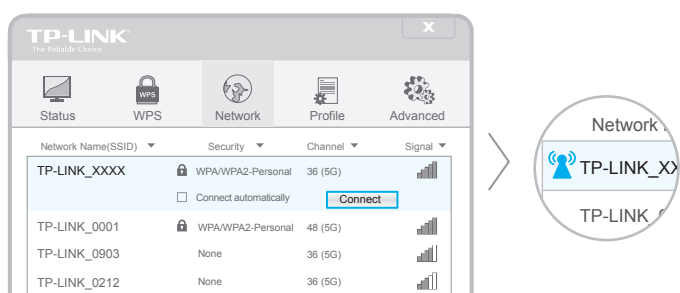## 3 Join a Wireless Network

For Windows

Option 1: Via Windows Wireless Utility

Click ⚹ or ⚹ (Network icon) on the taskbar, select your Wi-Fi network, and click **Connect**.

Note: In Windows XP, if you have installed TP-LINK Utility, you need to switch to Windows wireless configuration tool first.

Option 2: Via TP-LINK Utility

Select your Wi-Fi network from the TP-LINK Utility window and click **Connect**. The symbol indicates a successful connection.

For Mac OS X

Via TP-LINK Utility

A: Select the **Site Survey** tab of the pop-up utility window.

B: Select your Wi-Fi network and click **CONNECT**. The connection status can be viewed on the Link Status screen.