

DOCSIS 3.0 High Speed Cable Modem

High-Speed Internet that Saves You Up to \$120 Per Year



16×4 Channel Bonding Up to 680Mbps







Highlights

Channel Bonding for Better Performance

Certified DOCSIS 3.0 technology allows TC-7620 to deliver download speeds 16x faster than DOCSIS 2.0. The TC-7620 features 16x4 channel bonding for downstream rates up to 680Mbps.

Quick, Easy Setup

- Connect your computer or router to the modem using an Ethernet cable.
- modem.





• Connect the coaxial cable to the modem.

• Call your ISP or use service provider self-activation process to activate the




Highlights

Eliminate Monthly Rental Fees

Save money by returning your internet service provider's rental modem.*



Certified to work with internet service providers: XFINITY from Comcast, Cox, Spectrum[®], and more.

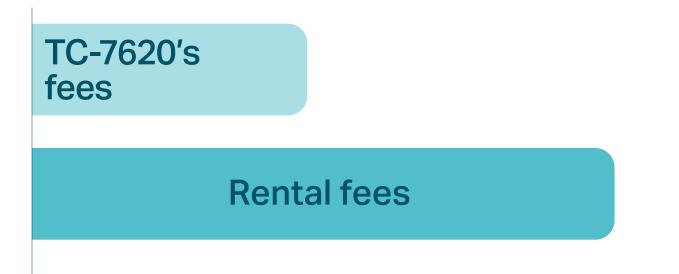



Compatible with Major Cable Providers

Features



- Channel Bonding Up to 16 downstream & 4 upstream channels provide data rates up to 680Mbps for downstream
- DOCSIS 3.0 Technology Allows TC-7620 to deliver download speeds 16x faster than DOCSIS 2.0
- Gigabit Port Ensures faster internet access for PC or wireless router




- · Easy Setup Quick and hassle-free installation
- Well-defined LEDs Clearly display device and network status



- Eliminate Monthly Rental Fees Save money by returning your internet service provider's rental modem
- Network Compatiblity Compatible with major cable providers
- DOCSIS Compatibility Backwards-compatible with existing DOCSIS 1.0, 1.1, and 2.0 systems



 Security & Firewall – Supports Baseline Encryption (BPI)/BPI+/EAE/SSD



- IPv4/IPv6 Dual Stack Supports IPv4 and IPv6 Internet Protocol simultaneously
- QoS Advanced QoS automatically recognizes & prioritizes streaming & gaming applications


Specifications


Downstream

- Channel Bonding: Up to 16
- · Channel Width: 96 MHz (16 channels) / 6 MHz (single channel)
- · Modulation: 64 QAM / 256 QAM
- Symbol Rate: 5.057 Msym/s (64 QAM) / 5.361 Msym/s (256 QAM)
- Maximum Data Rate: Up to 680 Mbps
- Frequency Range: 88 to 1002 MHz (edge to edge)

Upstream

- · Channel Bonding: Up to 4
- Channel Width: 200KHz / 400KHz / 800KHz / 1.6MHz / 3.2MHz / 6.4MHz
- Modulation: QPSK, 8/ 16/ 32/ 64/ 128 QAM
- Symbol Rate: 160 / 320 / 640 / 1280 / 2560 / 5120 Ksym/s
- Maximum Data Rate: Up to 143Mbps
- Frequency Range: 5 to 42MHz (edge to edge)

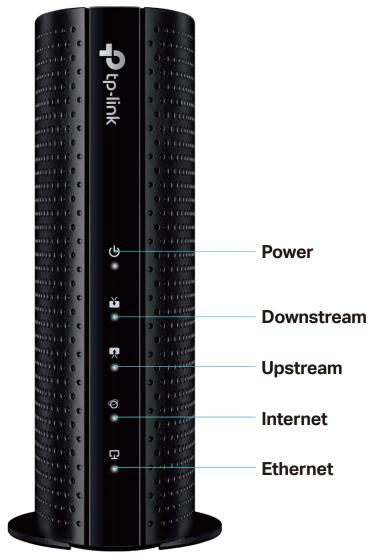

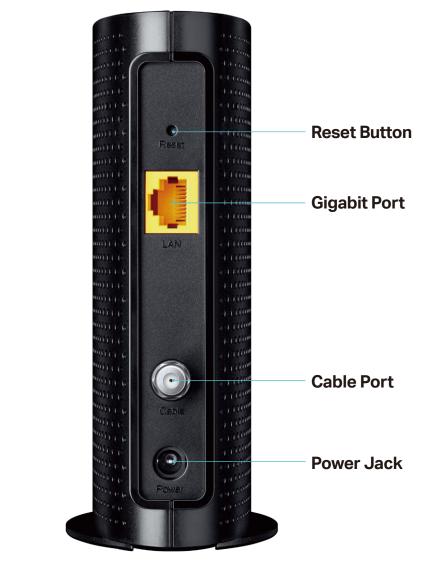

Specifications

Advanced Features

- IP Stack: Supports IPv4 and IPv6 dual stack
- DHCP: DHCP Client
- · VPN Passthrough: PPTP, L2TP, IPSec
- Muticast: Support IGMP v1/v2/v3
- Management and Maintance:
- Managed by Web
- Reset to factory default by Reset button
- Realtime statistics
- System Log

Others

Package Contents

- Cable Modem TC-7620
- Ethernet Cable
- Power Adapter
- Quick Installation Guide
- Information Card

Certification

- · FCC, UL, Cablelabs, RoHS
- Protocols and Standards

- Power Supply: 12VDC/1A

Environment

- Storage Humidity: 5%~90% non-condensing



or more information, please visit //www.tp-link.com/us/products/<u>details/TC-7620.html</u> or scan the QR code on the left.

* Maximum cable internet uplink and downlink speeds are the transmission rates that the device is capable of and certified for based on CableLabs DOCSIS 3.0 technology. Actual cable internet uplink and downlink speeds are not guaranteed and will vary according to your cable provider, MSO provisioning, and the speed tier of your subscription. Some modems are not compatible with certain cable providers. Please check with your cable provider to verify whether this modem is compatible with their service. Broadband cable service is required to use this device. Not compatible with voice services. *Based on a typical monthly equipment rental fee of \$10 per month.

Specifications are subject to change without notice. TP-Link is a registered trademarks or registered trademarks of their respective holders. Copyright @2016 TP-Link Technologies Co., Ltd. All rights reserved.

· IEEE Standards: IEEE802.3, 802.3u, 802.3ab, 802.1p, 802.1q

· Others: TCP/IP, DHCP, ICMP, IGMP, TFTP, ARP, ToD

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~70°C (-40°F~158°F)

· Operating Humidity: 10%~90% non-condensing

www.tp-link.com

TP-Link DOCSIS 3.0 High Speed Cable Modem TC-7620