TP-LINK[®]

300Mbps Wireless N ADSL2+ Modem Router TD-W8961ND

• Features:

- All-in-One: ADSL2+ modem, NAT router, 4-port switch and wireless N access point in one device provides an one-stop networking solution
- 300Mbps wireless speed makes it ideal for bandwidth consuming or interruption sensitive applications like online gaming, Internet call and even the HD video streaming
- Easy Setup Assistant with multi-language support provides quick
 & hassle free installation
- Wi-Fi On/Off Button allows users to simply turn their wireless radio on or off
- WPS Button allows users to easily set up a WPA encrypted secure connection
- SPI and NAT firewall protects end-user devices from potential attacks across the Internet
- 4000V Lightning Protection helps your device to avoid the damage of tough thunderstorms
- WDS wireless bridge provides seamless bridging to expand your wireless network
- Port VLAN binds specific LAN ports to PVCs for an enjoyable IPTV experience*



• Description:

TP-LINK's Wireless N ADSL2+ Modem Router TD-W8961ND is an all-in-one device that combines the function of a high speed ADSL modem, a 4-port 10/100Mbps NAT router and a wireless N access point. It is designed to give you a one-stop solution to acquiring and sharing high speed Internet access over a wired/wireless network. Supporting the latest ADSL2+ standards, the TD-W8961ND brings a much higher speed than a dial-up connection without tying up the phone line. Besides, Easy Setup Assistant with multi-language support provides quick & hassle free installation.

The TD-W8961ND provides high-speed, unrivaled wireless performance for your network at 300Mbps. Now you can enjoy more kinds of bandwidth consuming applications even like HD video streaming wirelessly. Along with the features of Dual Firewalls (NAT and SPI), QoS engine and TR-069, making TD-W8961ND the perfect choice for home or small office users.

* IPTV application may require subscribing to IPTV services from an ISP.


www.tp-link.com

• Specifications:

Product Description	300Mbps Wireless N ADSL2+ Modem Router
LAN Ports	4 10/100Mbps RJ45 LAN ports
WAN Port	1 RJ11 DSL port
IEEE Standards	IEEE 802.3, 802.3u
ADSL Standards	Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1(G.DMT),
ADCI 2 Stew devide	ITU-T G.992.2(G.Lite), ITU-T G.994.1 (G.hs)
ADSL2 Standards ADSL2+ Standards	ITU-T G.992.3 (G.dmt.bis), ITU-T G.992.4 (G.lite.bis)
	ITU-T G.992.5
Data Rates	Downstream: up to 24Mbps
	Upstream: up to 1Mbps
ATM / PPP Protocols	ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs)
	ATM Adaptation Layer Type 5 (AAL5)
	Bridged and routed Ethernet encapsulation
	VC and LLC based multiplexing PPP over Ethernet (RFC2516)
	PPP over ATM (RFC 2364)
	IPoA (RFC1577/2225)
	Dynamic Host Configuration Protocol (DHCP), DHCP relay
Main Features	Network Address Translation (NAT)
	Static Routing, RIP v1/v2
	VPN (PPTP, L2TP, IPSec) Pass-through
	PVC/Ethernet Port Mapping
	VLAN, 802.1P
	DNS Relay, DDNS
	IGMP Multicast, IGMP snooping V1/2
	Virtual Server, DMZ, ACL (Access Control List)
	UPnP
QoS	QoS Remarking based on IPP/ToS, DSCP and 802.1p
	Web Based Configuration (HTTP), Remote management,
Management	Telnet management, Command Line Interface, SSL for TR-069, SNMP v1/2c,
	SNMP over EOC, Web Based Firmware Upgrade, CWMP (TR-069), Diagnostic Tools
	NAT Firewall
с. н	SPI Firewall
Security	MAC/IP/Packet/Application/URL Filtering
	Denial of Service (DoS), SYN Flooding, Ping of Death
Wireless Standards	IEEE 802.11n, 802.11g, 802.11b
Frequency Range	2.4-2.4835GHz
Wireless Speed	11N: up to 300Mbps (dynamic)
Wireless Security	Provides 64/128-bit WEP encryption security and wireless LAN ACL (Access Control List),
	WPA-PSK/WPA2-PSK authentication and TKIP/AES encryption security
Wireless Transmit Power (Max)	20dBm (Max.EIRP)
Antenna Type	Omni directional, Detachable
Dimensions ($W \times D \times H$)	$7.7 \times 5.1 \times 1.4$ in. (195 × 130 × 36mm)
	Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ ($32^{\circ}F \sim 104^{\circ}F$),
Environment	Storage Temperature: -40°C~70°C (-40°F~158°F),
	Operating Humidity: 10%~90% non-condensing ,
	Storage Humidity: 5%~90% non-condensing

www.tp-link.com

• Diagram:

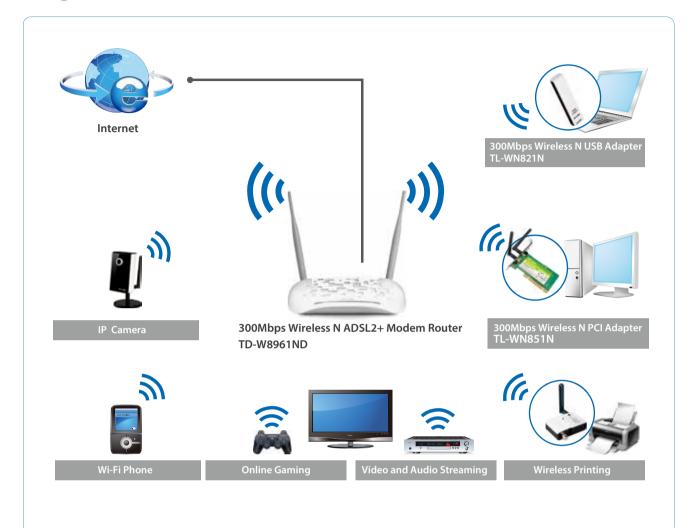

Package:

- 300Mbps Wireless N ADSL2+ Modem Router TD-W8961ND

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright @ 2014 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved.

- One Power Adapter
- One External Splitter (Optional)
- Two RJ-11 Telephone Cables
- One RJ-45 Ethernet Cable
- Resource CD
- Quick Installation Guide

Related Products:

- 300Mbps Wireless N USB Adapter TL-WN821N
- 300Mbps Wireless N PCI Adapter
- TL-WN851N
- 5-Port 10/100M Desktop Switch
- TL-SF1005D

www.tp-link.com