


Quick Installation Guide



1 Connect to a Computer

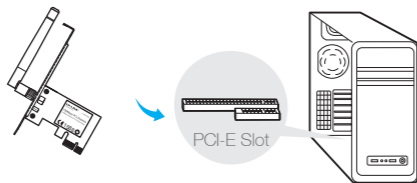

Insert the adapter into your computer by following these steps:

- Turn off your computer, unplug the power cord and other connected peripheral devices to your computer.
- Remove the case panel. Locate an available PCI-E slot and remove its slot cover.
- Carefully insert the adapter into the PCI-E slot and secure it with the retaining screw.
- Replace the case panel.
- Reconnect the power cord and turn on your computer.



Note:
In Windows XP, a Found New Hardware Wizard window will appear when the adapter is detected. Please click Cancel.

2 Install Driver and Utility

You can also download the driver and utility at www.tp-link.com.

- Insert the CD and run the **Autorun.exe** from the pop-up Autoplay window.
- Select **TL-WN781ND** and click **Install Driver and Utility**, then follow the InstallShield Wizard to complete the installation.

Note: In some operating systems, the CD screen will pop up automatically. Otherwise, run the CD manually.

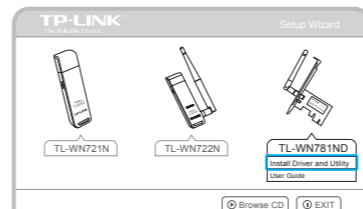


3 Join a Wireless Network


For Windows 10, TP-LINK Utility is not supported, please use the Windows built-in Wireless Utility to join a network.

Option 1: Via TP-LINK Utility

Select your Wi-Fi network from the pop-up utility window and click **Connect**. The symbol  indicates a successful connection.

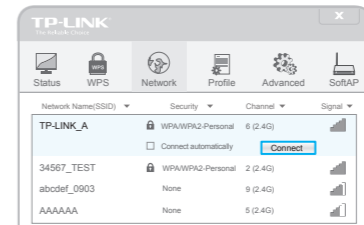

Option 2: Via Windows Wireless Utility

Click  (Network icon) on the system tray, select your Wi-Fi network, and click **Connect**.

Note: In Windows XP, you need to close the TP-LINK Utility before using the Windows Wireless Utility.



For more information, please visit our website

<http://www.tp-link.com>