


Quick Installation Guide

N900 Wireless Dual Band PCI Express Adapter

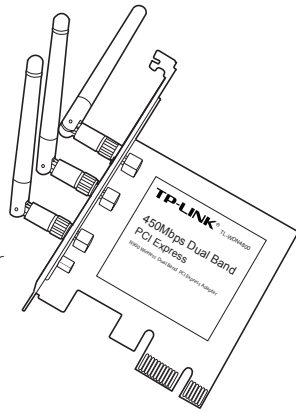


For more information, please visit our website: <http://www.tp-link.com>

7106504759 REV2.0.0

1 Hardware Connection

Insert the adapter into your computer following the steps.

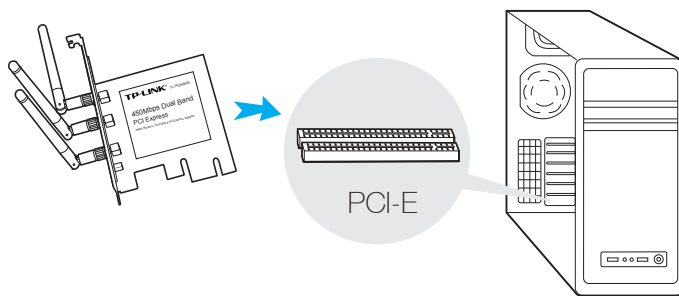


Steps:

1. Turn off your computer and unplug the power cord from the computer.
2. Open the case. Locate an available PCI Express slot and remove its slot cover. Keep the screw.
3. Insert the adapter into the PCI Express slot as shown above.
4. Secure the adapter with the screw removed in Step 2.
5. Close the case and insert the power cord back into the computer.
6. Turn on your computer.

Note: In Windows XP, a Found New Hardware Wizard window will pop up after the adapter has been inserted. Please click Cancel.


2 Install the Software

* You can also download the driver at www.tp-link.com/en/ if your computer can access the Internet via a wired connection.




Note:
If the Resource CD screen does not display, browse the files on the CD and double-click Autorun.exe.

Insert the TP-LINK resource CD into the CD-ROM drive. The Resource CD screen will pop up automatically.

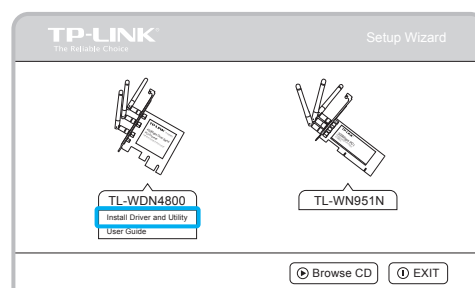

Select the model TL-WDN4800 and click **Install Driver and Utility**.

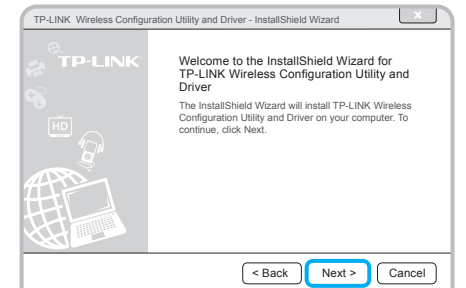

The **Install Shield Wizard** window will appear. Click **Next** and follow the instructions to finish the installation process.

3 Join a Wireless Network

Select your target wireless network from the list and click **Connect**. If the network is secure, enter its password. The symbol indicates a successful connection.

