

# Quick Installation Guide

3G Mobile WiFi, 5200mAh Power Bank  
MODEL NO. M5360




7106505270 REV1.2.0

## Connecting to the Internet

### 1 Insert a SIM Card


Open the card slot cover as shown, then **slide the SIM card** into the slot until you hear a clicking sound.

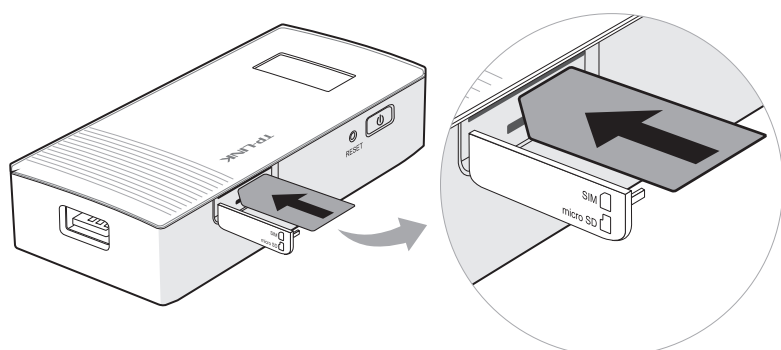

- \*SIM card not provided by TP-LINK.
- \*Micro or Nano SIM cards should be converted using provided SIM card trays.
- \*Before the SIM Card inserted, please make sure that M5360 is power off and not charged.

### 2 Turn on the M5360

Hold the **power button** until the screen appears as shown below.  
(You can also hold the power button until the screen appears "Power Off").

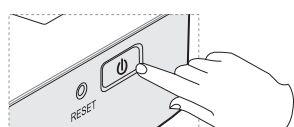


#### \*Advanced configuration

For advanced configuration, please enter the web-management page:  
Open your web browser and type **http://192.168.0.1** into the address bar, then enter the password, which is **admin** by default.


### 3 Connecting to the Internet

When turned on, the M5360 will boot for 1 minute. You will then see one of the following messages. Please follow the corresponding instructions.



#### Establish a Wireless Connection

Search for the Wireless Network name (SSID) and type in the Wireless Password found on the M5360's back cover.

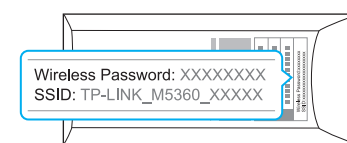

\*We suggest changing the wireless network name and password on the web-management page for your own security.



#### Enter the PIN Code

1. Open your web browser and type **http://192.168.0.1** in the address bar, and then enter the password, which is **admin** by default.
2. Choose "**Advanced->Dial-up->PIN Management**", then enter the correct PIN code according to your ISP and click **Unlock** for the settings to take effect.

**Note:** 1. If "**NO SERVICE**" appears on your screen, please verify the following and repeat step **3**.

- Verify that your SIM card is a WCDMA or GSM SIM card.
- Verify that your SIM card is in your ISP's service area.
- Verify that your SIM card has sufficient credit.

2. If "**NO SIM CARD**" appears on your screen, please turn off the M5360 and repeat steps **1** ~ **3**.

## FAQ(Frequently Asked Questions)

### FAQ1. What should I do if I cannot log into the web-management page?

- Verify that your device is connecting to the M5360.
- Verify that you entered the correct IP address **http://192.168.0.1**.
- Verify that your device is obtaining an IP address automatically.

### FAQ2. What should I do if I cannot access the Internet?

#### Tip1. Check the LAN connection

1. Open your web browser and type **http://192.168.0.1** in the address bar, and then enter the password, which is **admin** by default.
2. Check if you can log into the web-management page successfully. If not, please refer to FAQ 1 and retry.

#### Tip2. Check your ISP parameters

1. Open your web browser and type **http://192.168.0.1** into the address bar, then enter the password, which is **admin** by default.
2. Choose "**Advanced->Dial-up->Profile Management**" to verify the parameters are correct with your ISP. These parameters include APN, User name and Password.
3. If these settings are not correct, please click **Create** to create a new profile with the correct parameters, and select **Dial-up** to choose the new profile from the Profile List.

#### Tip3. Check the current network connection mode

1. Check the network connection mode on the screen. (The icon means auto connection mode and the icon means manual connection mode)

2. If the current mode is manual, open your web browser and type **http://192.168.0.1** into the address bar, then enter the password, which is **admin** by default.
3. Choose "**Advanced->Dial-up**" to check the network status, if the network is disconnected, click the **Connect** button to reconnect it.

#### Tip4. Check the Data Roaming

1. Please confirm with your ISP if you are in roaming service.
2. If roaming, open your web browser and type **http://192.168.0.1** into the address bar, then enter the password, which is **admin** by default.
3. Choose "**Advanced->Dial-up**", and then enable the Data Roaming.

#### Tip5. Check the SIM card status

- Verify that your SIM card has sufficient credit.
- Verify that your SIM is in your ISP's service area.

### FAQ3. How do I restore factory default settings?

**Tip1.** Hold the **RESET** button for about 5 seconds until the screen turns off.

**Tip2.** Log into the web-management page, and go to "**Advanced->System Tools->Restore Factory**".


**Note:** Once the M5360 is restored, all the current configurations will be lost and you may need to reconfigure it.

If your questions are not included here, please refer to our official website **www.tp-link.com** for technical support.

## Charging Your Device


Double-tapping the power button can switch between the two modes.

### Simultaneous 3G Sharing and Charging

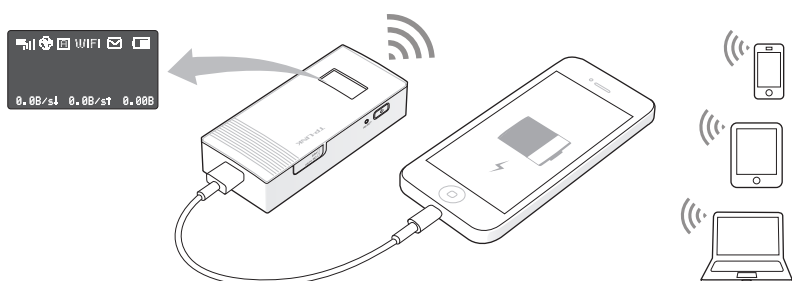

\*In this mode, M5360 will become hot as a result of high-load usage. When the M5360 overheats, it will automatically turn off to protect itself from damage. After the heat has dissipated, you can turn it on and use it normally.


### Charging Only (Strongly recommended to save power)

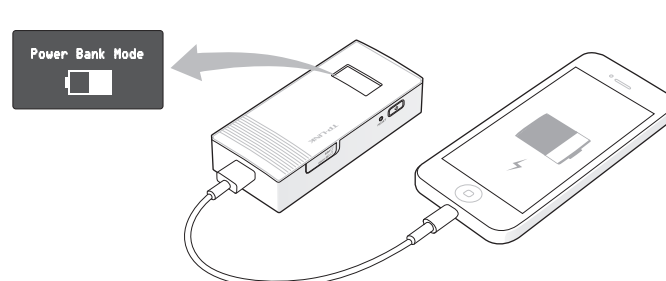


\*The M5360 can't be charged and charge the other devices at the same time.

## Charging Your M5360

### Method 1 Via the Power Adapter

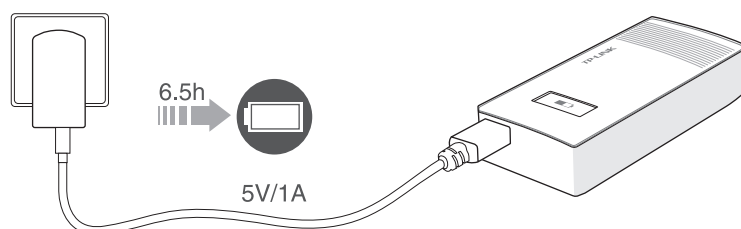

### Method 2 Via Computer USB

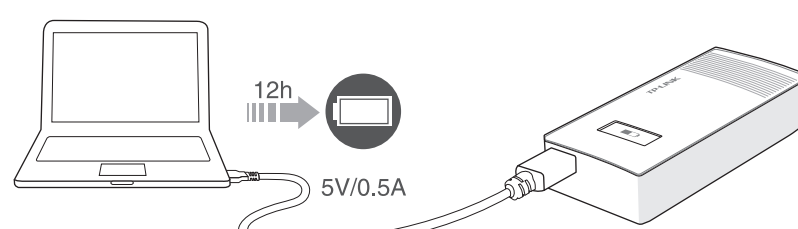

\*The M5360 has been fully charged when the lighting symbol (⚡) of battery icon disappeared.


## Power Saving Mode

For power saving, you may encounter the two situations below:

1. The screen will turn off automatically after 60 seconds.
2. The WiFi connection will turn off automatically if no WiFi devices connect to the M5360 for 15 minutes.

You can simply tap the power button to recover.

Please refer to the User Guide to modify the WiFi Auto-disable Time setting.

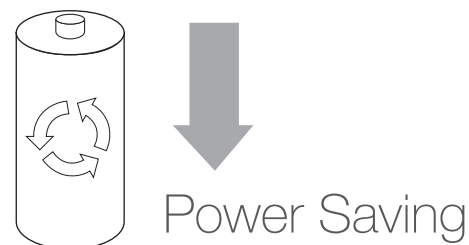

## Screen Display



Signal Network Type and Signal Strength

Internet Connection

Auto Connection Mode / Manual Connection Mode

WiFi WiFi Status and User Numbers

Messages

Battery Meter

0.0B/s↓ Download Speed

0.0B/s↑ Upload Speed

0.00B Cumulative Traffic Usage

## Important Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble or modify the device.
- Do not use damaged power adapter or USB cables to charge the device.
- Do not use the device where wireless devices are not allowed.

\*Please follow the above instructions when operating the device. We cannot guarantee that no accidents or damage will take place due to improper use of the device. Please use with care and operate at your own risk.

## For More Information

For more information, please visit our website: <http://www.tp-link.com>

