


Quick Installation Guide

Wireless Pan/Tilt Surveillance Camera

MODEL NO. TL-SC4171G

Package Contents

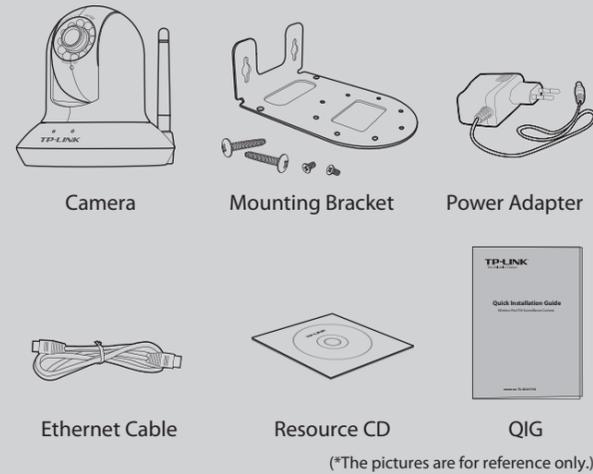

System Requirement

The following operating systems are supported:


- Windows XP
- Windows Vista
- Windows 7
- Windows 98
- Windows 2000
- Windows 2003
- Windows Me
- Mac
- Linux

The following browsers are supported:


- Microsoft Internet Explorer
- FireFox
- Safari
- Chrome

1 Warning Before Installation

- Do not keep the Camera exposed to direct sunlight.
- Do not place the Camera in high humidity environments such as in a kitchen.
- Do not place the Camera where there are sharp temperatures such as near an oven.
- Do not place the camera near devices that emit radio waves, such as mobile phones.

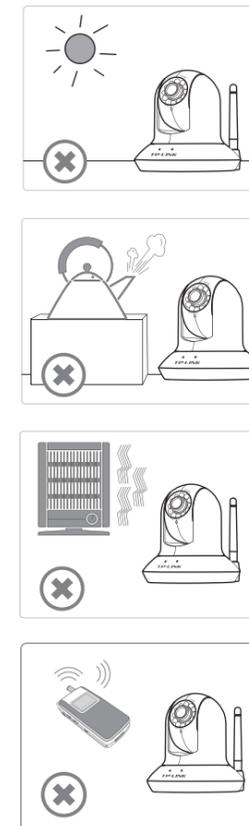


2 Physical Description

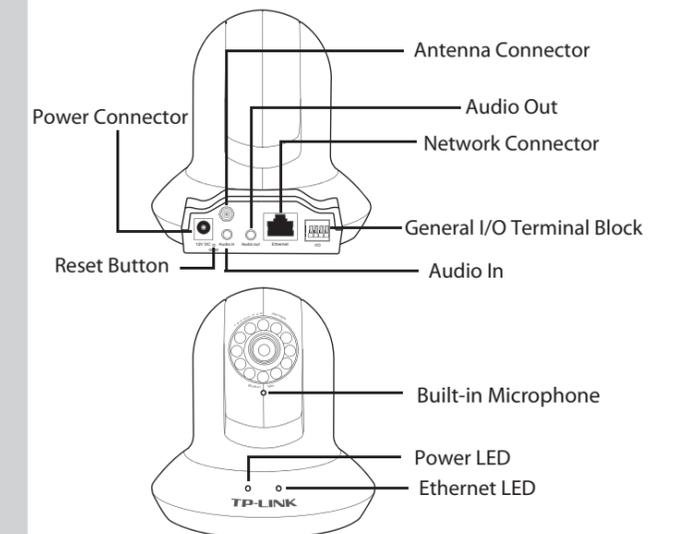

Item	Description
Power LED	<ul style="list-style-type: none"> • Solid: The electrical power is on. • Off: There is no electrical power.
Ethernet LED	<ul style="list-style-type: none"> • Solid: The Ethernet port is linked, but there is no activity. • Blinking: There is traffic between the Ethernet port and the network. • Off: There is no Ethernet connection.
Reset Button	<ul style="list-style-type: none"> • Step 1: Re-power on the camera and wait for at least 45s until it restarts up normally. • Step 2: Press the button for more than 10s, then it will be restored to factory defaults after automatic rebooting.

3 Camera Mounting



Hollow anchors


Type A screws

Type B screws


NOTE: In the bracket, there are several mounting holes arranged in a circle. The direction of the camera's installation can be anywhere within a 360 degree scope, adjusted as required. It is strongly recommended that you connect the Ethernet cable and power adapter cord to the camera first before mounting.

Ceiling Mount

- 1** Fix the camera to the bracket with two type A screws.




- 2** Fix the bracket and camera to the ceiling using two type B screws and two hollow ceiling anchors.

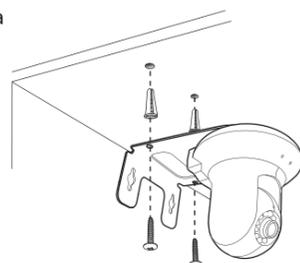


Wall Mount


- 1** Fix the bracket to the wall using two type B screws and two hollow wall anchors.

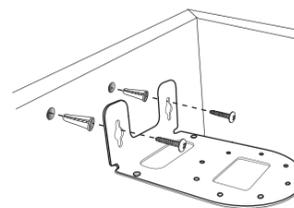

- 2** Fix the camera to the bracket with two type A screws.

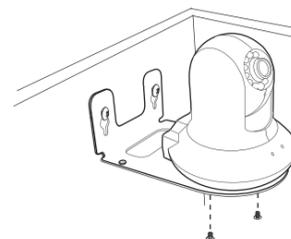


4 Hardware Connection

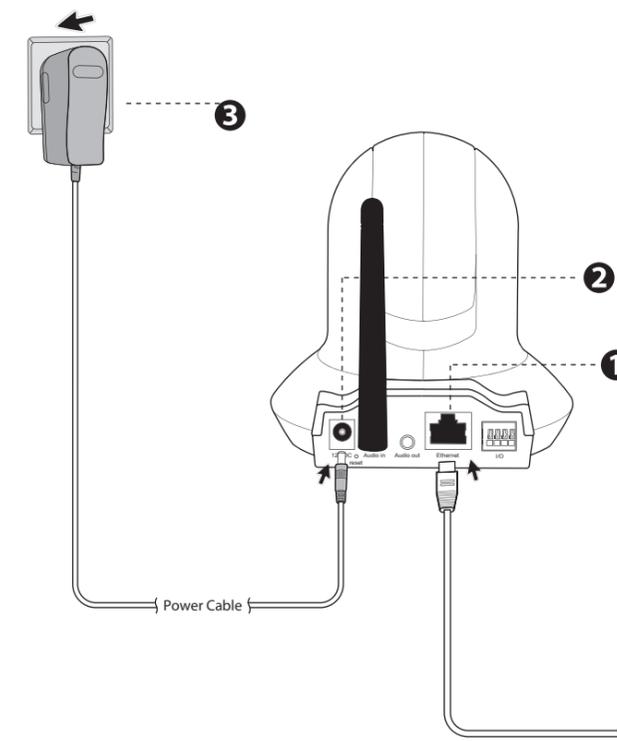


NOTE: Before proceeding, confirm that your PC is connected to your router and can access the Internet. Also confirm that your router's DHCP feature is enabled. (Most routers have DHCP turned on by default.) For detailed information, please refer to the operation instructions included with your router.

- 1** Connect the camera to the LAN network (Router or Switch) via Ethernet cable.
- 2** Connect the power adaptor cord to the DC In jack.
- 3** Plug the power adaptor into the power outlet.

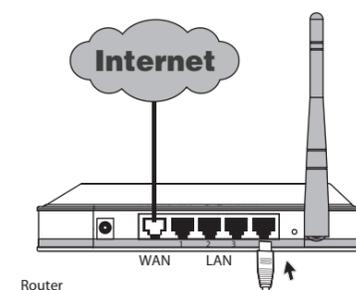

5 Software Installation


- 1 Insert the provided Resource CD into your CD-ROM drive.

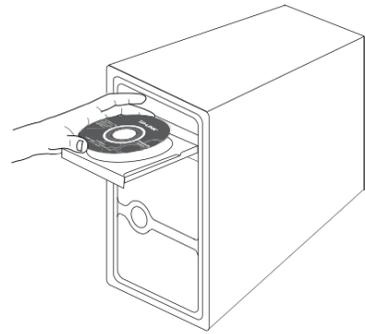


- 2 The Setup Wizard will automatically pop up on your computer's screen, then click "Intelligent IP Installer" (you can click the installer's manual later for the advanced setting guide).¹



- 3 The Intelligent IP Installer window will appear. Choose the language you want, then click on the "Next" button to continue the program.

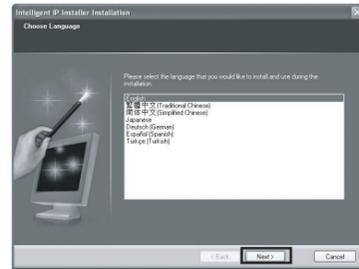

- 4 Select the optional program as needed. The default setting is highly recommended. Click "Next" to continue.²

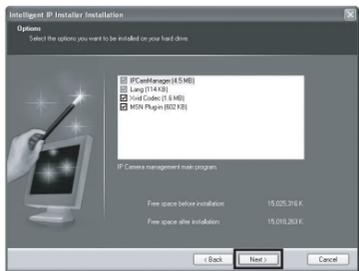


* If you want to be able to use MSN view, please select the last option.

- 5 Setup is completed. Click "Finish".


6 PC Configuration

We use IE in Windows XP as an example, the setup is similar in Windows Vista/Windows 7.


- 1 Open an IE browser. Click "Tools", then "Internet Options...".

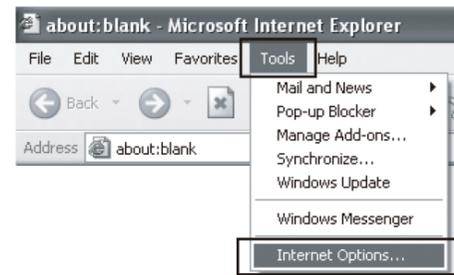

- 2 Click "Security" -> "Internet" -> "Custom Level...". Find the item "Download signed ActiveX controls" and set to "Prompt", then Click "OK".³

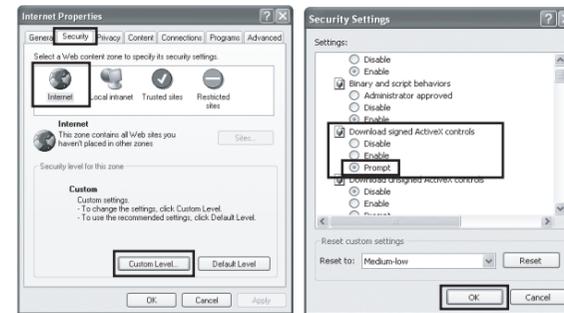

- 3 Click "Security" -> "Local Intranet" -> "Custom Level...". Find the item "Download signed ActiveX controls" and set to "Prompt", then Click "OK".³

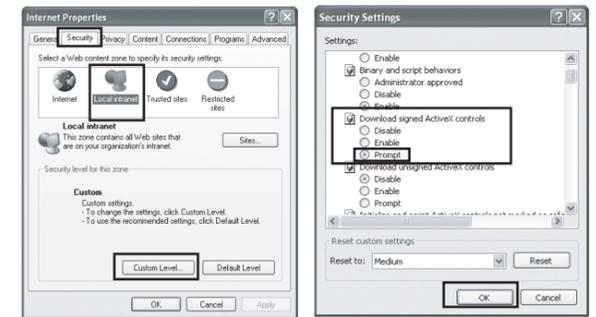

Notations:

1. If the CD does not automatically run with the installation window appearing, find the CD drive in the "My Computer" space and run it directly there.
2. A warning page will pop up automatically if the MSN program is not installed in your computer. You can reinstall the MSN Plug-in after the installation of the MSN.
3. The item "Download signed ActiveX controls" is "Prompt" by default. You can change it after the whole configuration.


7 Access the Camera Using IP installer

- 1 Click the icon of **Intelligent IP Installer** (installed in step 5) on the computer desktop.

Then click the "Search", the main page will show up listing all active TP-LINK camera devices. Select the relevant camera from the list and click "Link to IE".



- 3 When accessing the IP Camera for the first time, a yellow information bar appears below the address bar. Click the information bar and select "Install ActiveX Control...".

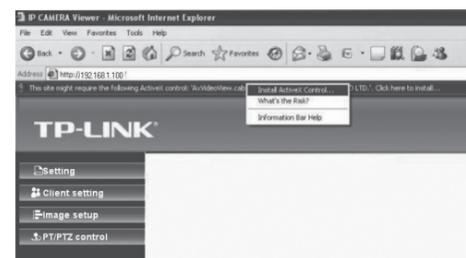

- 4 Click "Install".



- 2 Enter your Username and Password to login to the IP Camera. (Default is admin / admin)



- 5 Live video displays in the centre of your web browser.



NOTE:

For further specific applications, please refer to the User Manual on resource CD.

Moreover, **Application Guide** on resource CD will guide you to set up some typical applications step by step, so as to help you become familiar with the camera immediately.

For more details about Troubleshooting and Technical Support contact information, please log on to our Technical Support Website.

<http://www.tp-link.com/support/Support.asp>

Technical Support

- For more troubleshooting help, go to www.tp-link.com/support/faq.asp
- To download the latest Firmware, Driver, Utility and User Guide, go to www.tp-link.com/support/download.asp
- For all other technical support, please contact us by using the following details:

Global
Service Language: English
Tel: +86 755 26504400
E-mail: support@tp-link.com
Service time: 24hrs, 7days a week

Singapore
Tel: +65 62840493
E-mail: support.sg@tp-link.com
Service time: 24hrs, 7days a week

Malaysia
Tel: 1300 88 875465 (1300 88TPLINK)
E-mail: support.my@tp-link.com
Service time: 24 hours a day, 7days a week

Switzerland
Tel: +41 (0)848 800998 (German service)
E-mail: support.ch@tp-link.com
Fee: 4-8 Rp/min, depending on rate of different time

Service Time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

Australia & New Zealand
Tel: AU 1300 87 5465
NZ 0800 87 5465
E-mail: support@tp-link.com.au
Service time: 24hrs, 7 days a week

USA/Canada
Toll Free: +1 866 225 8139
E-mail: support.usa@tp-link.com
Service time: 24hrs, 7days a week

UK
Tel: +44 (0) 845 147 0017
E-mail: support.uk@tp-link.com
Service time: 24hrs, 7days a week

Germany / Austria
Tel: +49 1805 875465 (German Service) / +49 1805 TPLINK
E-mail: support.de@tp-link.com
Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone.

Service Time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)
* Except bank holidays in Hesse

TP-LINK TECHNOLOGIES CO., LTD.
www.tp-link.com