


User Guide

Model No. SP290

Product Specifications

Model	SP290
Dimension	17.2 x 2.3 x 1.6 inch (436.5 x 59.0 x 41.6 mm)
Cord Length	6 feet
Interface	6 standard EU AC power outlets and 3 USB ports
USB Output	Each port max. DC 5V 2.4A, total max. DC 5V 5A
Max. Spike Voltage	6kV
Surge Protection Rating	700 Joules
Continuous Duty Electrical Rating	16A/ 230V/ 3680W
Button	One lighted button to power on/off, being integrated with overload protection breaker
Surge Protector LED Status	Normally the LED is on, indicating the surge protection is active and the connected appliances are under protection. ▲ CAUTION Otherwise, the surge protection may not be active.

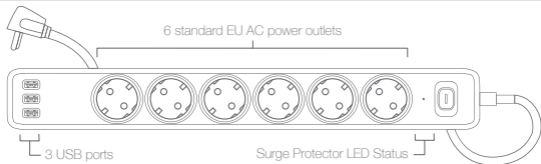

Caution

- Always use surge protectors indoors, in a dry location.
- Do not use the SP290 if properly grounded outlets are not available.
- Do not "daisy-chain" the SP290 or use it with extension cords.
- Do not plug the SP290 into another re-locatable power strip.
- Do not plug the SP290 into a generator.
- Do not expose the SP290 to any liquids.
- Do not replace the supply cord of the SP290.
- If the power cord of the SP290 becomes damaged, unplug and discard the SP290 to prevent any electrical damage.
- The power cord of the SP290 must be plugged directly into an AC power source to ensure proper surge protection.
- Connected Equipment must be plug into the outlets of the SP290 in the correct position. Uncoil the power cord of the SP290 before use.
- Do not cover the power cord of the SP290 with any material.
- Keep children and pets away from the power cord of the SP290.
- Use original or certified cable

⚠ CAUTION

- If the surge protector resists a power surges or spike that is beyond the specified limits, it may cause the LED to turn off
- The LED CANNOT turn back on, once it turns off.
- The surge protector can still function as a normal power strip, though the surge protection may not be active.

COPYRIGHT & TRADEMARKS

- ◆ Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are registered trademarks of their respective holders.
- ◆ No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-Link Technologies Co., Ltd. Copyright © 2018 TP-Link Technologies Co., Ltd. All rights reserved.

CE MARK WARNING



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.



Продукт сертифіковано згідно з правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Safety Information

- ◆ Options to shut off or turn off power to the SP290:
 - Turn power button into the off position. The LED light on the power button will turn off.
 - Disconnect the SP290 from the AC source. The LED light on the power button will turn off.
- ◆ Do not disassemble or make repairs to the SP290. Doing this will void the limited warranty. If you need service, please contact TP-Link Support.
- ◆ Avoid water and wet locations.

Explanation of the symbols on the product label



Indoor use only



Energy efficiency marking



Protection earth



AC voltage



RECYCLING



DC voltage

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.



www.tp-link.com

Technical Support

Tel: +86 755 2650 4400

E-mail: support@tp-link.com

Web: <http://www.tp-link.com/support>