



150Mbps Wireless N **PCI Express Adapter**

N150 Desktop Wi-Fi with **Proven Reliablity**





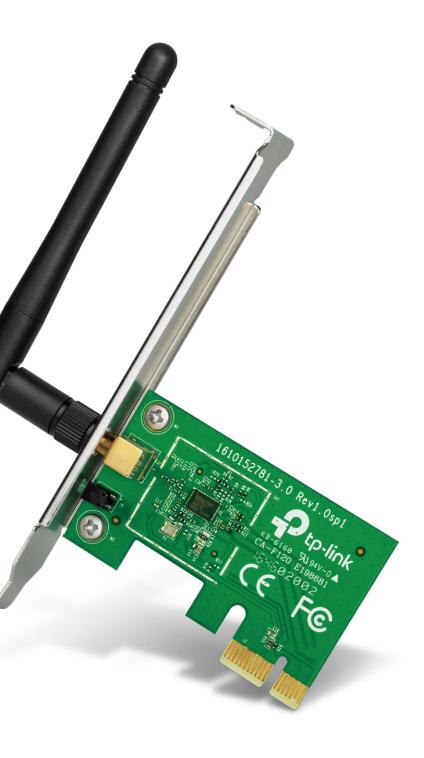



Advanced Security



Low-Profile Bracket


Highlights

N150 Stability for Your Daily Needs

The TL-WN781ND reaches Wi-Fi speed of up to 150Mbps, ideal for surfing, emailing and posting social media.



The extra low-profile bracket provided allows for installation in slim desktop towers through the changing of the bracket.

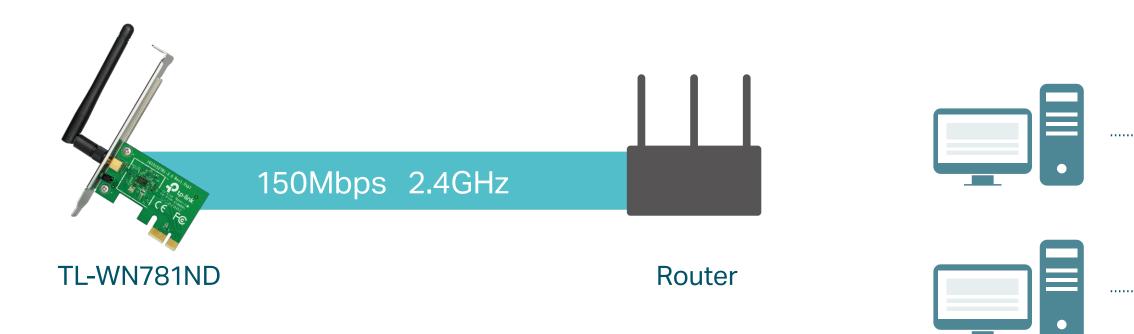

Extra Low-Profile Bracket for Better Compatibility



Features



Fast Wi-Fi – Up to 150Mbps Wi-Fi speed for joyful surfing experience




 Better Coverage – One detachable antenna provides wider wireless coverage, delivering a stable connection to your Wi-Fi network



- Easy Installation Simply insert the adapter into a free PCI-E slot in your desktop and connect to an available Wi-Fi network
- System Compatibility Supported operating systems include Windows 10/8.1/8/7, Linux (kernel 2.6.24 ~ 4.3)

Security

 Encryptions for Secure Network – WPA/WPA2 encryptions provide active protection against security threats



 Roaming Technology – Guarantees efficient and reliable client wireless connections

Specifications

Wireless

- Wireless Standard: IEEE 802.11b/g/n
- Frequency: 2.4-2.4835GHz
- Signal Rate: 150Mbps at 2.4GHz
- · Wireless Mode: Ad-Hoc/Infrastructure Mode
- Wireless Security: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM

Hardware

- Interface: PCI Express 2.0
- Antenna: 1 Detachable External Antenna
- LED: Status
- Dimensions: 4.8 × 3.1 × 0.8 in. (120.8 × 78.5 × 21.5 mm)

Others

- · Package Contents
- Low-Profile Bracket
- Quick Installation Guide
- Resource CD
- · Certification FCC, CE, RoHS
- · System Requirements Windows10/8.1/8/7. Linux
- Environment



For more information, please visit http://www.tp-link.com/en/products/details/?model=TL-WN781ND or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademarks or registered trademarks of their respective holders. Copyright @2018 TP-Link Technologies Co., Ltd. All rights reserved. *Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless data through conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

www.tp-link.com

150Mbps Wireless N PCI Express Adapter TL-WN781ND

Operating Temperature: 0°C~40°C (32°F ~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing