


AC2300 MU-MIMO Wi-Fi Router

Best for Simultaneous 4K Streaming and Gaming











Superior Wi-Fi Coverage






Highlights

4 Antennas & Beamforming for Maximum Coverage

Equipped with three external antennas and one internal antenna, Archer C2300 creates stronger and more reliable networks for all to enjoy in your home. Beamforming technology concentrates the Wi-Fi signal towards your connected devices, providing better Wi-Fi range and network performance.

MU-MIMO for 4× Faster Connections[‡]


MU-MIMO technology serves multiple devices at once, reducing wait time, increasing Wi-Fi throughput for every device, and making each stream more efficient.



Regular Router



Archer C2300

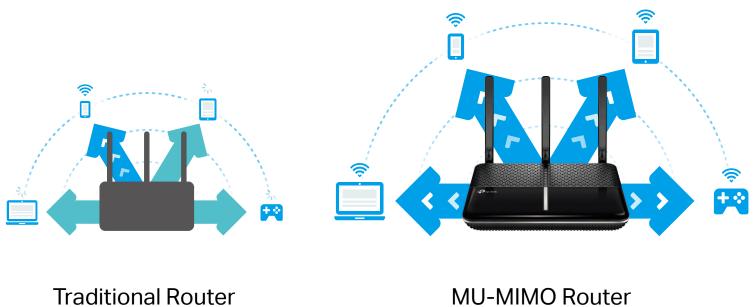

Sends data to one device at a time

Simultaneously sends data to multiple devices


Highlights


Full Gigabit Ports

Smart Connect


A Gigabit WAN port enables bottleneck-free access bandwidth. 4 Gigabit LAN ports help wired devices achieve peak performance for HD streaming and gaming.

Smart Connect technology surveys the Wi-Fi environment to intelligently assign devices to the best available band, balancing the network load to give each device optimized connection and throughput.

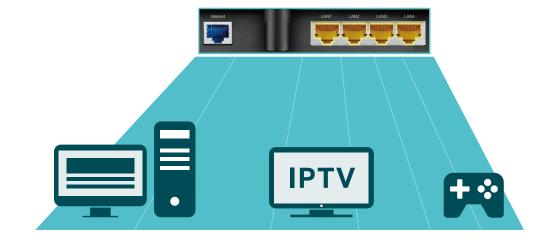

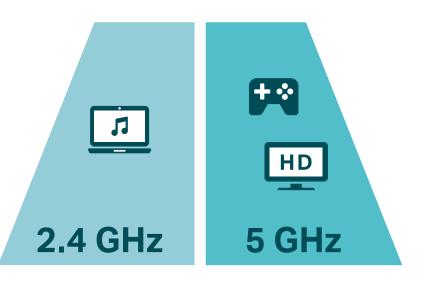


Features

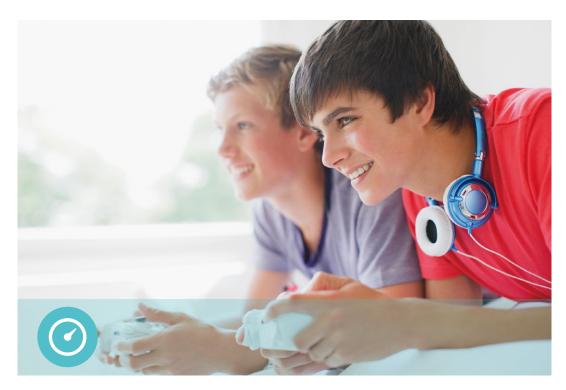

Speed

- Ultimate Wireless Speed Combined wireless speeds up to 600 Mbps (2.4GHz) and 1733 Mbps (5GHz)
- MU-MIMO Technology Simultaneously exchanges data with several devices, achieving speeds which are 4x faster than standard AC routers
- Support 802.11 ac Provides a data transfer rate 3 times faster than 802.11n for each stream

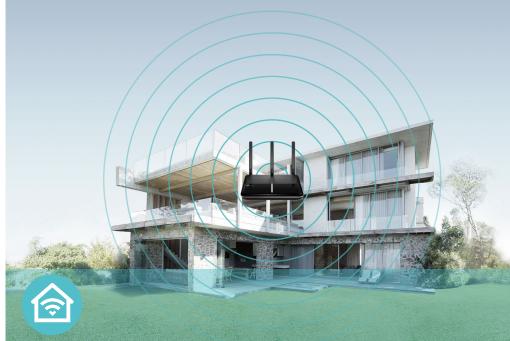

Wi-Fi Range


- Ultimate Range Wi-Fi Three external antennas and one internal antenna ensure the widespread Wi-Fi coverage and a stable connection
- Beamforming Technology Concentrates Wi-Fi signal to individual devices for stronger connections



Reliability


- Simultaneous Dual Band Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Smart Connect Intelligently assigns each device to the best Wi-Fi band
- Airtime Fairness Balances airtime usage of connected devices to improve overall throughput and efficiency
- IPTV Supports IGMP Proxy/Snooping, Bridge and Tag VLAN to optimize IPTV streaming

Features

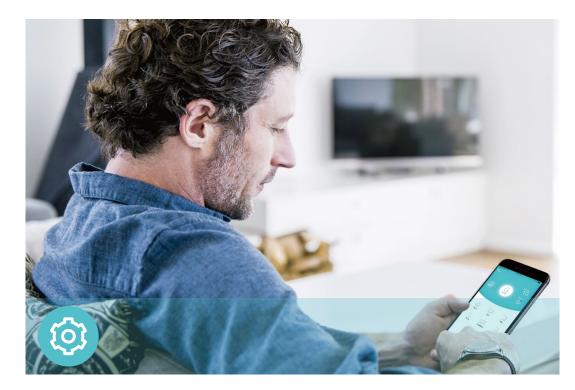

Ease of Use

- Intuitive Web UI Ensures quick and simple Installation without hassle
- Fast Encryption One-touch WPA wireless security encryption with the WPS button
- Wi-Fi On/Off Turn on/off wireless radio as needed using the Wi-Fi On/Off button
- Power On/Off Conveniently power on or off your router as required
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device

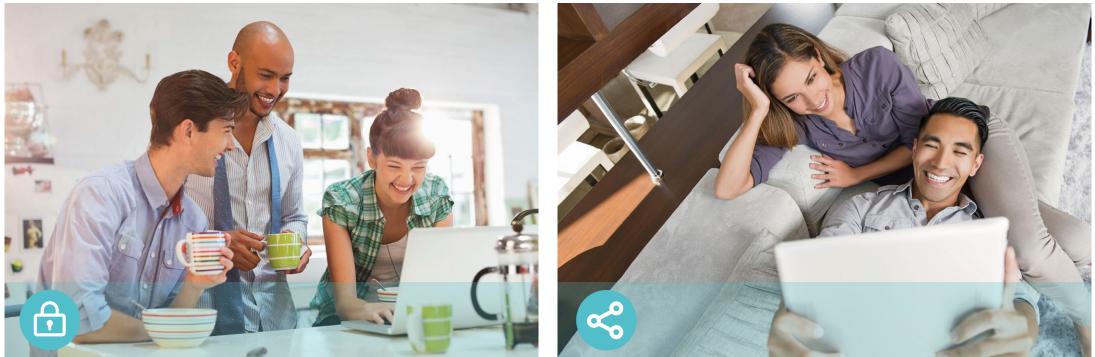

Security

- Guest Network Keeps your main network secure by creating a separate network for friends and visitors
 10x Faster Transfer Speed The USB 3.0 port provides up to 10x faster USB hard drive access than USB 2.0 connections
- Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
 USB Port for Fast Sharing – With the USB port, you can access and share your files locally, or remotely through the router's FTP server
- Secure VPN Access Connects to a private network with a safe and secure OpenVPN and PPTP VPN connection
- Encryptions for Secure Network WPA-PSK and WPA2-PSK encryptions provide active protection against security threats

Easy Sharing


Media Sharing – Allows you to play music, watch videos and view photos from any device on your network

Specifications

Hardware

- Ethernet Ports: 4× Gigabit LAN Port + 1× Gigabit WAN Port
- USB Port: 1 × USB 3.0 Port
- Buttons: Wi-Fi On/Off Button, Power On/Off Button, Reset Button, WPS Button
- Antennas: 3× External Antenna + 1× Internal Antenna
- External Power Supply: 12VDC/2.5A (US version), 12VDC/2A (EU version)
- Dimensions (W x D x H): $8.5 \times 6.5 \times 1.4$ in. (216 × 164 × 36.8 mm)



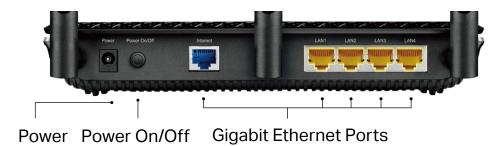

Wireless

- Frequency: 2.4 GHz and 5 GHz
- Transmit Power:
- CE: <13.5dBm(2.4 GHz), <16.5dBm(5 GHz)
- · Reception Sensitivity: 5GHz:

- 54M: -76dBm, 6M: -95dBm
- 2.4GHz:

- · Wireless Function: Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics

· Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4 GHz Signal Rate: 1733 Mbps at 5 GHz, 600Mbps at 2.4 GHz⁺

FCC: <25dBm(2.4 GHz), <24dBm(5 GHz)

11ac80M MCS11: -58dBm, 11ac80M MCS0: -88dBm 11ac40M MCS11: -61dBm, 11ac40M MCS0: -91dBm 11ac20M MCS11: -63dBm, 11ac20M MCS0: -95dBm

11n40M MCS9: -63dBm, 11n40M MCS0: -89dBm 11n20M MCS8: -67dBm, 11n20M MCS0: -92dBm 54M: -75dBm, 11M : -90dBm, 6M: -93dBm, 1M: -98dBm

· Wireless Security: Enable/Disable SSID Broadcast, 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryptions, QSS, Wireless MAC Filter

Specifications

Software

- · Quality of Service: WMM, Bandwidth Control
- · WAN Type: Dynamic IP, Static IP, PPPoE, PPTP(Dual Access), L2TP(Dual Access)
- Management: Access Control, Local Management, Remote Management
- DHCP: Server, DHCP Client List, Address Reservation
- Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- Dynamic DNS: DynDns, NO-IP, TP-Link
- Access Control: Parental Control, Local Management Control, Blacklist, Whitelist
- · Firewall Security: DoS, SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- · USB Sharing: Supports Samba(Storage), FTP Server, Media Server
- Guest Network: 2.4 GHz guest network x 1, 5 GHz guest network x 1

Others

- · Certification:
- CE, FCC, RoHS
- System Requirements: NetWare, UNIX or Linux
- Java-enabled browser
- Cable or DSL Modem
- Environment:

- Package Contents
- Power Adapter
- **RJ45 Ethernet Cable**
- Quick Installation Guide



For more information, please visit

http://www.tp-link.com/products/details/Archer-C2300.html

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.

[‡]Four or more 1×1 MU-MIMO client devices must be connected to achieve up to four times faster performance. Use of MU-MIMO requires clients to also support MU-MIMO.

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS,

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other

Subscription with an internet service provider (for internet access)

Operating Temperature: 0°C~40°C (32°F ~104°F)

Storage Temperature: -40°C~70°C (-40°F ~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing

AC2300 MU-MIMO Wi-Fi Router Archer C2300

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device must accept any interference received, including interference that may cause undesired operation. Specifications are subject to change without notice. TP-Link is a registered trademarks of TP-Link Technologies Co., Ltd. All rights reserved. ¹Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless data throu volume and density of traffic and client location.