


AX1500 Wi-Fi Range Extender

Works With Any Wi-Fi Router[‡]






Wi-Fi 6 Dead-Zone Killer












Easy Setup Within Minutes

Highlights

Extend AX1500 Wi-Fi to Your Whole Home

Works with any Wi-Fi router to eliminate Wi-Fi dead zones, and blanket your home with stable, super-fast, seamless Wi-Fi via OneMesh™.

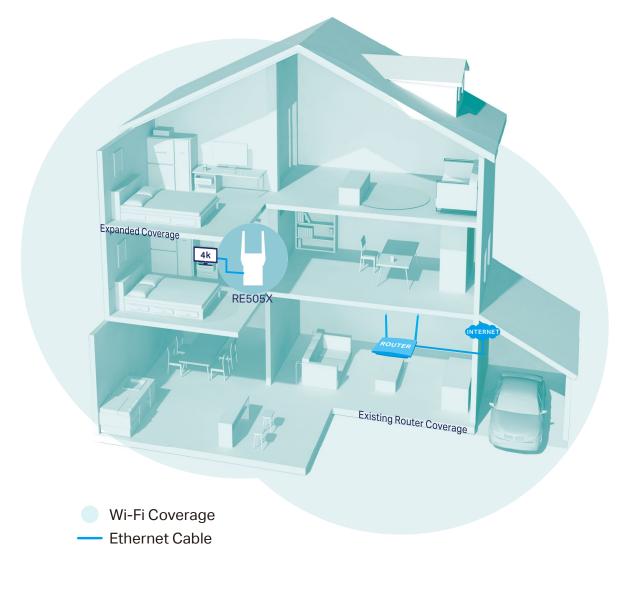



Turbocharge your devices with wireless speeds of up to 1.5Gbps.







Save Clients' Battery Power*

Target Wake Time schedules the connection time of battery-powered devices to reduce their power consumption.



Keep your network running at top-speed by automatically choosing the fastest connection path to the router.



Create a new Wi-Fi access point to enhance your wired network with Wi-Fi capability.



Easy setup and management via WPS button/Tether app/Web UI.

Faster Wi-Fi 6 Speed

Larger Capacity^Δ

Wi-Fi 6 builds a more efficient network that increases the average throughput by 4 times and serves more devices.

Ultra-Low Latency

Take advantage of ultra-low latency to enjoy smoother online experience.

Adaptive Path Selection

Access Point Mode

Easy Setup Within Minutes

Highlights



RE505X is more than a traditional range extender. It creates a Mesh network by connecting to a OneMesh[™] router for seamless whole-home coverage.



Wi-Fi Dead-Zone Killer

Eliminate weak signal areas with Wi-Fi coverage for the whole house.



Smart Roaming

Enjoy uninterrupted streaming, surfing, and more—even when moving around your home.



One Wi-Fi Name

Stay connected to the same network name in every room.



Easy Setup and Unified Management

Push the WPS button to set up a Mesh network you can manage from the Tether app or web UI.



Check full list of OneMesh[™] extenders and routers at https://www.tp-link.com/One-Mesh/compatibility

*More compatible devices coming soon

Wi-Fi 6 Range Extender

Ptp-link



Secure One-touch Connection(WPS)

Instantly connect the extender to a router without inference configuration.

Smart Signal Indicator

See signal to find the best spot to extend Wi-Fi.


- Strong signal
- Weak signal

Gigabit Ethernet Port

Plug in to give wired device network access, particularly ideal for high bandwidth consuming devices.



Features

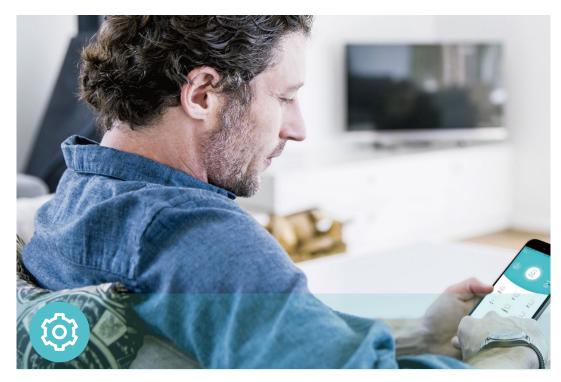



- Intuitive Web UI– Ensures quick and simple installation without hassle
- Fast Encryption One-touch WPA wireless security encryption
 with the WPS button
- Hassle-free Management with Tether App The network management is easy with the TP-Link Tether App, available on any Android or iOS device
- Online Upgrade Keeps you informed of the latest firmware and allows online updating on the web UI



Speed

- Ultimate Wireless Speed Combined wireless speeds of up to 300 Mbps (over 2.4 GHz) and 1200 Mbps (over 5 GHz)[†]
 Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Support Wi-Fi 6 Turbocharge your devices with wireless speeds of up to 1.5 Gbps
- Adaptive Path Selection Keep your network running at top-speed by automatically choosing the fastest connection path to the router


Reliability

- Reliable Connection Internal antennas for optimal Wi-Fi coverage and reliable wireless connections
- Ultra-Low Latency Take advantage of ultra-low latency to enjoy smoother online experience

Specifications

Hardware

- Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- Antenna: 2 External Antennas
- Power Consumption: 10W
- Dimensions (W × D × H): 2.9×1.8×4.9 in. (74.0×46×124.8 mm)

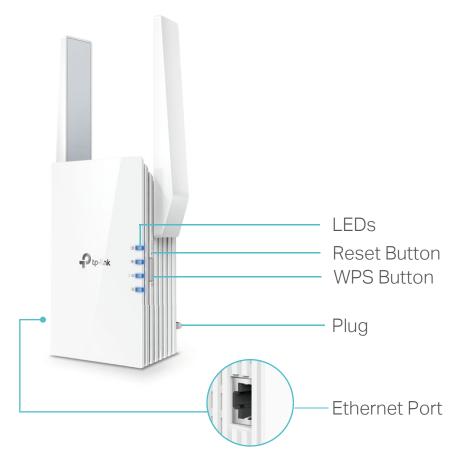

Wireless

- Wireless Standards: IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n 2.4 GHz
- Frequency: 2.4 GHz and 5 GHz
- Signal Rate: 300 Mbps at 2.4 GHz, 1200 Mbps at 5 GHz
- Transmit Power: 2.4G<20dBm,5G<30dBm
- Reception Sensitivity:
- 5 GHz:
- 11a 6Mbps:-93dBm, 11a 54Mbps:-75dBm
- 11ac HT20 MCS8:-70dBm, 11ac HT40 MCS9:-66dBm
- 11ac HT80 MCS9:-62dBm
- 2.4 GHz:
- 11g 6Mbps:-94dB, 11g 54Mbps:-77dBm
- 11n HT20 MCS7:-75dBm, 11n HT40 MCS7:-72dBm
- · Wireless Function: Enable/Disable Wireless Radio, Wireless Statistics
- Wireless Security: 64/128-bit WEP, WPA/WPA-PSK2 encryptions



For more information, please visit

https://www.tp-link.com/home-networking/range-extender/re505x/

or scan the QR code left

Attention: In EU member states and EFTA countries, the operation in the frequency range 5150MHz - 5350MHz is only permitted indoors.

‡The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated. §Smart Roaming is designed for devices that support the 802.11k/v standard.

△Up to 4x Capacity refers to 4x increase in median throughput under dense environment compared to 11ac wave 2 range extender.

*Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors.

Others

Certification

CE, RoHS

System Requirements

Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

· Package Contents

Wi-Fi Range Extender RE505X

Quick Installation Guide

Specifications are subject to change without notice. TP-Link is a registered trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved. †Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.