



# AV2000 Gigabit Powerline ac Wi-Fi Kit

AC1200 Wi-Fi that  
Breaks Through Walls

TL-WPA9610 KIT



HomePlug  
AV2 2000Mbps



2x2 MIMO  
Technology




Wi-Fi  
Auto-Sync

# Highlights

## 2 × 2 MIMO for More Throughput over Powerline

2 × 2 MIMO technology is like adding an extra lane on a highway. It establishes multiple simultaneous connections so you can enjoy 2× faster, more stable powerline speeds.

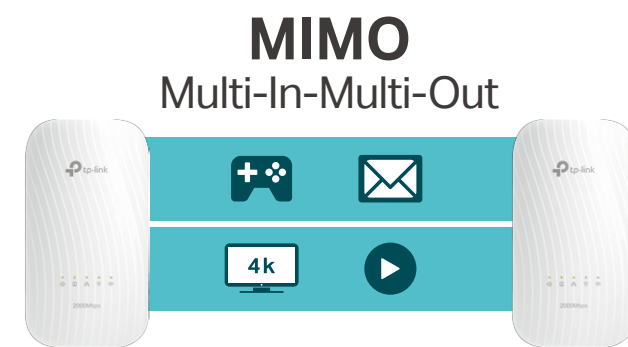

## Wi-Fi Auto-Sync for a Unified, Powerful Network

Powerline extenders simply copy your router's Wi-Fi settings and apply any changes across the secure powerline network with Wi-Fi Clone and Wi-Fi Move.



# Highlights


## Fast Wi-Fi for Every Need in Every Room

300Mbps (2.4GHz) is ideal for browsing the web and video chatting, while 867Mbps (5GHz) is perfect for HD streaming and lag-free gaming.



## Gigabit Ethernet for Fast Connections

The Gigabit Ethernet ports provide reliable high-speed wired connections for game consoles, smart TVs, and NAS.

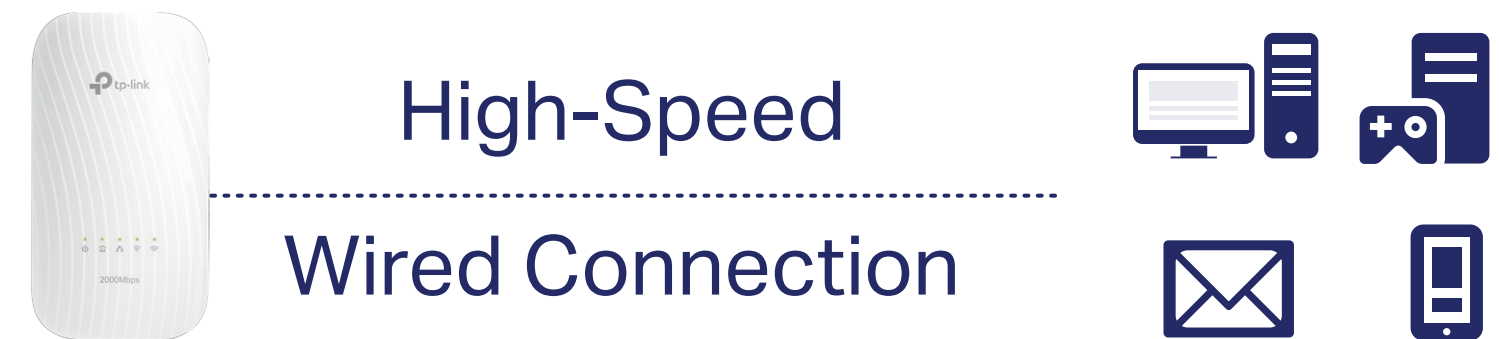

# Features

## Speed

- **Wireless AC Standard** – AC1200 dual band Wi-Fi (867Mbps on 5GHz & 300Mbps on 2.4GHz) allows streaming, gaming, emailing, browsing and posting on your wireless devices, throughout your home
- **HomePlug AV2** – Provides up to 2000Mbps high-speed data transmission over a home's existing electrical wiring
- **Gigabit Ethernet Ports** – Provide reliable high-speed wired connection for game consoles, smart TVs, and NAS
- **Speed Optimization** – Supports IGMP managed multicast IP transmission, optimizing IPTV streaming

## Range

- **300 meters Range** – Up to 300 meters / 1000 feet range over the existing household power circuit

## Ease of Use

- **Wi-Fi Auto-Sync** – Simply copy your router's Wi-Fi settings and apply any changes across the secure powerline network with Wi-Fi Clone and Wi-Fi Move
- **TP-Link tpPLC** – Allows you to easily manage your network using the intuitive tpPLC App or the tpPLC Utility
- **Plug, Pair, and Play** – Quickly set up a secured Powerline network

## Reliability

- **2X2 MIMO with Beamforming** – Establish simultaneous connections, providing more stable connections and expansive coverage


## Security

- **Pair Button** – Provides a connection with 128-bit AES encryption, at the touch of "Pair" button
- **Parental Controls** – Manage when connected devices can access the internet
- **Encryptions for Secure Network** – WPA-PSK/WPA2-PSK encryptions provide active protection against security threats

# Specifications

## Hardware

- Transmission Speeds:
  - Powerline: up to 2000 Mbps
  - Ethernet: 10/100/1000 Mbps
- Standards and Protocols:
  - HomePlug AV2, HomePlug AV, IEEE 1901, IEEE 802.3, IEEE 802.3u, IEEE 802.3, IEEE 802.3ab, IEEE 802.11b/g/n (2.4GHz), IEEE 802.11a/n/ac (5GHz)
- Interface: TL-WPA9610: 1 Ethernet Port; TL-PA9020: 2 Ethernet Ports
- Plug Type: EU
- Button: Pair, Reset, Wi-Fi Clone, LED On/Off
- LED Indicator: Power, Powerline, Ethernet, Wi-Fi (2.4GHz), Wi-Fi (5GHz)
- Dimensions (W x D x H):
  - TL-WPA9610: 3.1 × 4.8 × 14.05 in ( 48 × 77.5 × 140.5 mm)
  - TL-PA9020: 2.68 × 3.0 × 12.3 in (30 × 68 × 123 mm)
- IGMP: IGMP v1/v2/v3
- Power Consumption:
  - TL-WPA9610: Maximum: 14W, Typical: 10W, Standby: 7W
  - TL-PA9020: Maximum: 5.8W, Typical: 5.6W, Standby: <0.6W
- Range: Up to 300 meters/1000 feet over existing electrical wiring
- Compatibility:
  - Compatible with all HomePlug AV & AV2 standard powerline adapters

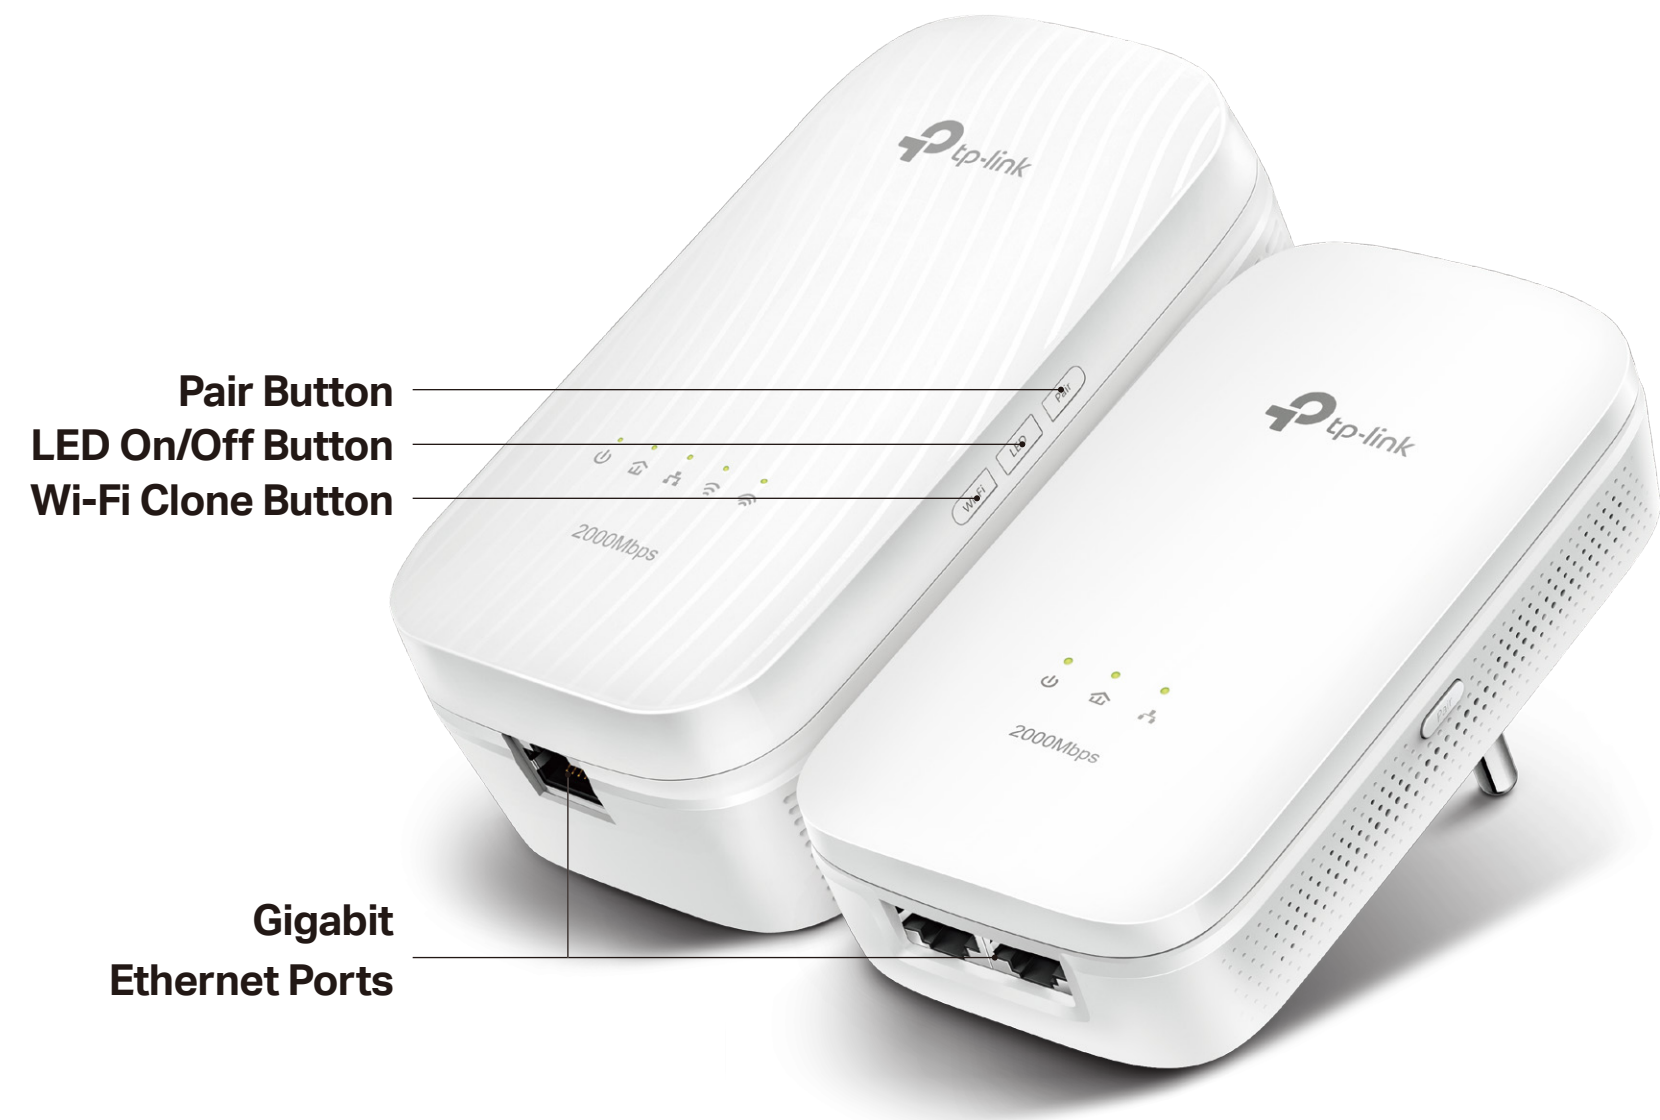

# Specifications

## Software

- Modulation Technology: OFDM

- Security:

Wireless: WPA-PSK / WPA2-PSK, WEP Encrptions

Powerline: 128-bit AES Encryption

- Management Tools:

tpPLC: Scan the QR code to download TP-Link tpPLC App



Or download new tpPLC Utility on PCs: [www.tp-link.com](http://www.tp-link.com).

## Others

- Package Contents

TL-WPA9610 × 1, TL-PA9020 × 1

Ethernet Cable × 2

Quick Installation Guide

- Certification

CE, RoHS

- System Requirements

Windows 10/8.1/8/7/Vista/XP, Mac OS, Linux

- System Requirements for tpPLC Utility

Windows 10/8.1/8/7/Vista/XP and Mac OS X (10.7 or later)

- Environment

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~70°C (-40°F~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing



For more information, please visit  
<http://www.tp-link.com/en/products/details/TL-WPA9610-KIT.html>  
or scan the QR code on the left.

\* Listed AV and Wi-Fi speeds refer to the theoretical maximum physical-layer data transfer rate. Actual data speeds vary and are influenced by the home's Wi-Fi/electrical/physical environment, and if adapters are placed on the same home circuit. Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

[www.tp-link.com](http://www.tp-link.com)

TP-Link AV2000 Gigabit Powerline ac Wi-Fi Kit TL-WPA9610 KIT