


AX1750 Wi-Fi 6 Range Extender

Works With Any Wi-Fi Router[‡]






Wi-Fi 6 Dead-Zone Killer












Easy Setup Within Minutes

Highlights

Extend AX1750 Wi-Fi to Your Whole Home

Works with any Wi-Fi router to eliminate Wi-Fi dead zones, and blanket your home with stable, super-fast, seamless Wi-Fi via OneMesh™.

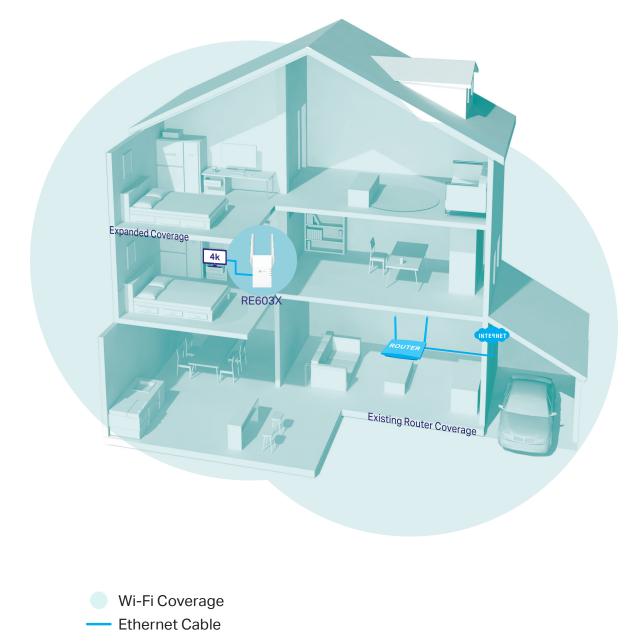



Turbocharge your devices with wireless speeds of up to 1.75 Gbps.



Larger Capacity^Δ Wi-Fi 6 builds a more efficient network that increases the average throughput by 4 times and servers more devices.





Save Clients' Battery Power*

Target Wake Time schedules the connection time of battery-powered devices to reduce their power consumption.



Keep your network running at top-speed by automatically choosing the fastest connection path to the router.



Create a new Wi-Fi access point to enhance your wired network with Wi-Fi capability.



Easy setup and management via WPS button/Tether app/Web UI.

Faster Wi-Fi 6 Speed

Ultra-Low Latency

Take advantage of ultra-low latency to enjoy smoother online experience.

Adaptive Path Selection

Access Point Mode

Easy Setup Within Minutes

Highlights



RE603X is more than a traditional range extender. It creates a Mesh network by connecting to a OneMesh[™] router for seamless whole-home coverage.



Wi-Fi Dead-Zone Killer

Eliminate weak signal areas with Wi-Fi coverage for the whole house.



Smart Roaming

Enjoy uninterrupted streaming, surfing, and more—even when moving around your home.



One Wi-Fi Name

Stay connected to the same network name in every room.



Easy Setup and Unified Management

Push the WPS button to set up a Mesh network you can manage from the Tether app or web UI.



Check more info about OneMesh technology and full list of OneMesh extenders/routers at: https://www.tp-link.com/onemesh/re603x

*More compatible devices coming soon

Wi-Fi 6 Range Extender



Secure One-touch Connection (WPS)

Instantly connect the extender to a router without inference configuration.

Smart Signal Indicator

See signal to find the best spot to extend Wi-Fi.


Strong signalWeak signal


Gigabit Ethernet Port

Plug in to give wired device network access, particularly ideal for high bandwidth consuming devices.



Features

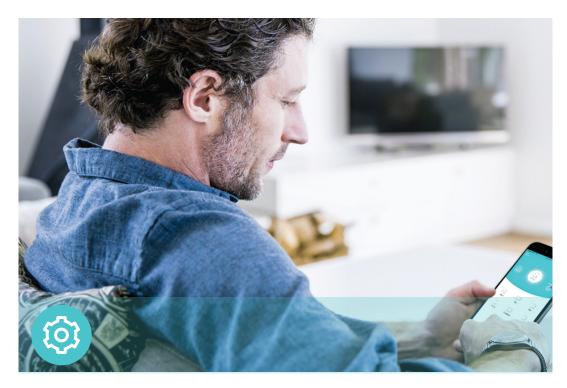

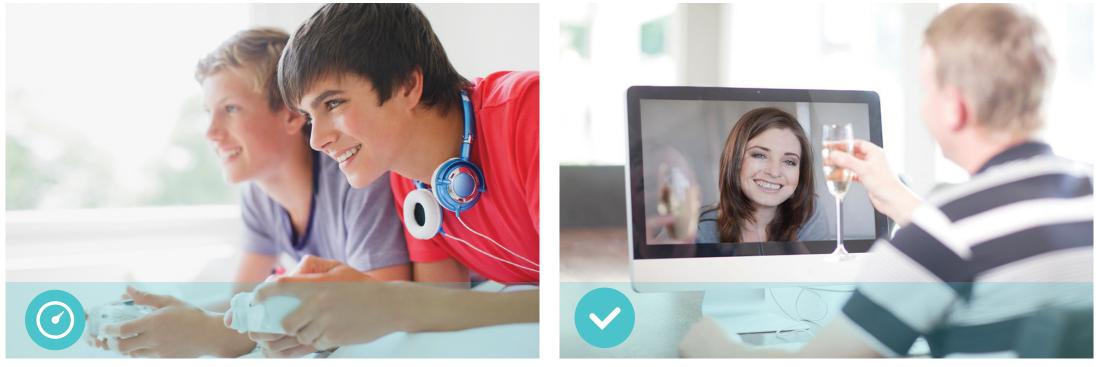

Ease of Use

- Intuitive Web UI– Ensures quick and simple installation without hassle
- Fast Encryption One-touch WPA wireless security encryption with the WPS button
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android or iOS device
- Online Upgrade Keeps you informed of the latest firmware and allows online updating on the web UI

Speed

- Ultimate Wireless Speed Combined wireless speeds of up to 574 Mbps (over 2.4 GHz) and 1201 Mbps (over 5 GHz)[†]
 Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Support Wi-Fi 6 Turbocharge your devices with wireless speeds of up to 1.75 Gbps
- Adaptive Path Selection Keep your network running at top-speed by automatically choosing the fastest connection path to the router


Reliability

- Reliable Connection Internal antennas for optimal Wi-Fi coverage and reliable wireless connections
- Ultra-Low Latency Take advantage of ultra-low latency to enjoy smoother online experience

Specifications

Hardware

- Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- · Antenna: 2 External Antennas
- Power Consumption: 10W
- Dimensions (W × D × H): 2.9×1.8×4.9 in. (74.0×46×124.8 mm)

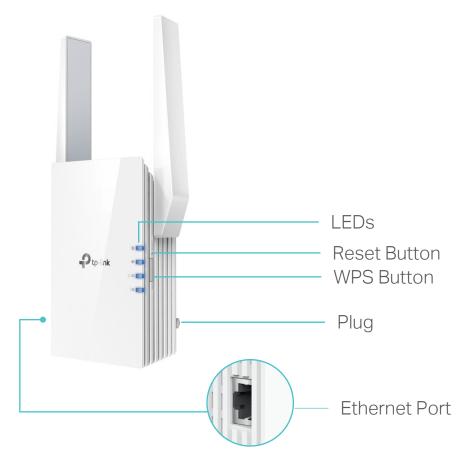

For more information, please visit

https://www.tp-link.com/home-networking/range-extender/re603x/

or scan the QR code left

Wireless

- Wireless Standards: IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n/ax 2.4 GHz
- Frequency: 2.4 GHz and 5 GHz
- Signal Rate: 574 Mbps at 2.4 GHz, 1201 Mbps at 5 GHz
- Transmit Power: FCC: 2.4 GHz ≤21dBm, 5 GHz ≤21dBm
- · Reception Sensitivity: 5GHz:

11ax HE80 MCS0: -87dBm, 11ax HE80 MCS11: -56dBm 11a 6Mbps: -93dBm, 11a 54Mbps: -75dBm 11ac HT20 MCS0: -92dBm, 11ac HT20 MCS8: -70dBm 11ac HT40 MCS0: -90dBm, 11ac HT40 MCS9: -66dBm 11ac HT80 MCS0: -87dBm, 11ac HT80 MCS9: -62dBm 2.4GHz:

11ax HE40 MCS0: -93dBm, 11ax HE40 MCS11: -63dBm 11g 54Mbps: -77dBm, 11n HT20 MCS7: -75dBm 11n HT40 MCS7: -72dBm

- Wireless Function: Enable/Disable Wireless Radio, Wireless Statistics
- Wireless Security: 64/128-bit WEP, WPA/WPA2-PSK encryptions

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders.

[†]Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage per ft² are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

⁺The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated. [§]Smart Roaming is designed for devices that support the 802.11k/v standard.

^aUp to 4x Capacity refers to 4x increase in median throughput under dense environment compared to 11ac wave 2 range extender.

*Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors. ©2020 TP-Link

Others

- Certification
- FCC, RoHS
- System Requirements

Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

· Package Contents

Wi-Fi Range Extender RE603X

Quick Installation Guide