


Quick Installation Guide

3G HSPA+ USB Adapter

MODEL NO. MA260

Package Contents

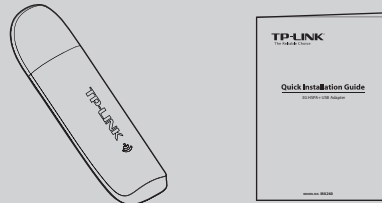


MA260

QIG

System Requirement


Operating System : Windows 7/Vista/XP 32/64-bit
CPU: 500MHz Pentium or above
Hard Disk: 20G or above
RAM: 128M or above

1 Hardware Installation

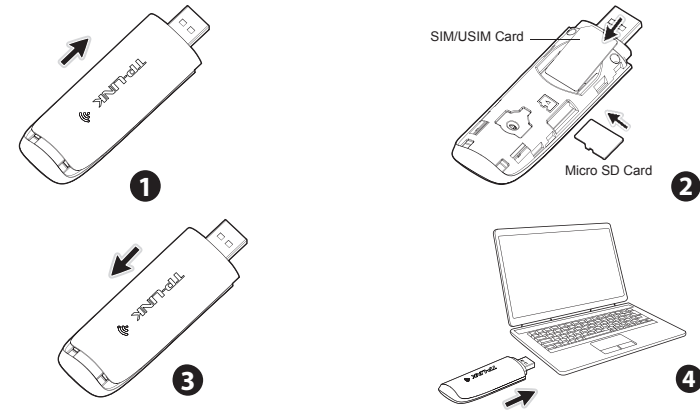

- 1 Open the cover.
 - 2 Insert the SIM/USIM card and the Micro SD card in the direction indicated on the Adapter.
- Note** A Micro SD card is an optional accessory. You need to buy one yourself. To remove the Micro SD card, press it to eject it from the Adapter.
- 3 Replace the cover.
 - 4 Plug the Adapter directly into the USB port on your computer.

2 LED Explanation



Status	Indication
Flashing Red	No SIM/USIM card is inserted.
Solid Red	The Adapter is initializing.
Flashing Green	The SIM/USIM card has registered to the network.
Solid Green	The network is available with a successful Internet connection.

3 Software Installation (The installation procedures in Windows 7/Vista/XP are similar. Here we use the procedures in Windows 7 as an example.)

- 1 The following window will automatically appear on your desktop. Click the **Run AutoRun.exe**.
- 2 The **InstallShield Wizard** window will appear. Click **Next** to continue.
- 3 Click **Change** to specify the destination you wish the application to be located or leave it in the default location. Click **Next** to continue.
- 4 Click **Install** to begin the installation.
- 5 The installation process may take 1~2 minutes. Please wait.
- 6 The following screen will then appear. Click **Finish** to complete the setup.

Note After installation, the icon will appear on your desktop. Double-clicking the icon can start the utility.

4 Connect to Network

1 After installation, the utility will appear on your desktop. Click on the icon (Network) to display the **Network** interface.



2 The network parameters will be configured automatically according to the SIM/USIM card inserted. With successful configuration, a profile name (your ISP name by default) will appear on the interface. Here we use Profile 1 as an example. Click **Connect** to establish an Internet connection.



3 If you see the **Disconnect** button and the icon (Green), it indicates that you are now connected to the Internet and can enjoy using it. To disconnect from the Internet, click the **Disconnect** button.




Note If you can't connect to the Internet, click on the icon (Settings) and then click the **Connecting** button to check connection settings on the interface below. For details, please click on the icon (Help) to refer to the instructions in "4.5.1 Connecting" in the User Guide.



Troubleshooting

What can I do if the system does not run the installation program automatically?

The device will appear as a virtual disc in **My Computer** (as shown in the following picture). Double-click the icon to start the installation program.



What can I do if I cannot access the Internet?

- 1) Check the network's signal strength.
- 2) Make sure you have activated the wireless online service. You can ask your service provider for details as to how to activate it.
- 3) If the wireless online service is activated, click on the icon (Settings) on the utility interface and then click the **Connecting** button to check connection settings.

Why there is no signal indicated?

- 1) You may be in a location where there is no GSM/GPRS /EDGE/WCDMA/HSDPA (HSUPA) network coverage, such as an underground parking garages, tunnels or a remote rural area. Change your location to find a place where there is GSM/GPRS/EDGE/WCDMA/HSDPA (HSUPA) network coverage.
- 2) The Adapter may not be properly connected. Close the management software and carefully pull out the Adapter. Plug it into your computer again to check the signal.
- 3) The SIM/USIM card may not be inserted properly. Remove the SIM/USIM card and reinsert it properly.
- 4) The driver may not be installed properly. Remove the TP-LINK 3G client driver and then plug the Adapter into

Note For more help with the Adapter, please click on the icon (Help) on the interface to refer to the User Guide.

Technical Support

- For more troubleshooting help, go to www.tp-link.com/en/support/fap
- To download the latest Firmware, Driver, Utility and User Guide, go to www.tp-link.com/en/support/download
- For all other technical support, please contact us by using the following details:

Global

Tel: +86 755 26504400
E-mail: support@tp-link.com
Service time: 24hrs, 7 days a week

UK

Tel: +44 (0) 845 147 0017
E-mail: support.uk@tp-link.com
Service time: 24hrs, 7days a week

Ukraine

Tel: +380 (44) 590-51-14
E-mail: support.ua@tp-link.com
Service time: Monday to Friday
14:00 PM to 22:00 PM

USA/Canada

Toll Free: +1 866 225 8139
E-mail: support.usa@tp-link.com
Service time: 24hrs, 7days a week

Germany / Austria

Tel: +49 1805 875465 (German Service)
+49 1805 TPLINK
E-mail: support.de@tp-link.com
Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42EUR/min from mobile phone.
Service Time: Monday to Friday, 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time in Germany)
* Except bank holidays in Hesse

Malaysia

Tel: 1300 88 875465 (1300 88TPLINK)
E-mail: support.my@tp-link.com
Service time: 24hrs, 7 days a week

Turkey

Tel: 444 19 25 (Turkish Service)
NZ 0800 87 5465
E-mail: support.tr@tp-link.com
Service time: 9:00 AM to 6:00 PM, 7days a week

Italy

Tel: +39 02 66987799
E-mail: support.it@tp-link.com
Service time: Monday to Friday, 9:00 AM to 6:00 PM

Brazil

Toll Free: 0800-770-4337
E-mail: suporte.br@tp-link.com
Service time: Monday to Saturday
08:00 AM to 08:00 PM

Russian Federation

Tel: 8 (495) 223-55-60
8 (800) 250-55-60 (toll-free call form any RF region)
E-mail: support.ru@tp-link.com
Service time: From 10:00 to 18:00 (Moscow time)
*Except weekends and holidays in Russian Federation

Singapore

Tel: +65 62840493
E-mail: support.sg@tp-link.com
Service time: 24hrs, 7 days a week

Australia/New Zealand

Tel: AU 1300 87 5465
NZ 0800 87 5465
E-mail: support.au@tp-link.com (Australia)
support.nz@tp-link.com (New Zealand)
Service time: 24hrs, 7 days a week

Poland

Tel: +48 (0) 801 080 618/+48 22 7217563 (if calls form mobile phone)
E-mail: support.pl@tp-link.com
Service time: Monday to Friday
9:00 AM to 5:00 PM, GMT+1 or GMT+2 (Daylight Saving Time)

Indonesia

Tel: (+62) 021 6259 135
E-mail: support.id@tp-link.com
Service time: Monday to Friday
9:00 -12:00 ; 13:00 -18:00
*Except public holidays

Switzerland

Tel: +41 (0)848 800998 (German Service)
E-mail: support.ch@tp-link.com
Fee: 4-8 Rp/min, depending on rate of different time
Service time: Monday to Friday 9:00 AM to 6:00 PM, GMT+ 1 or GMT+ 2 (Daylight Saving Time)