


# Quick Installation Guide



AC600 High Power  
Wireless Dual Band USB Adapter


MODEL NO. Archer T2UHP  
7106506599 REV1.1.0

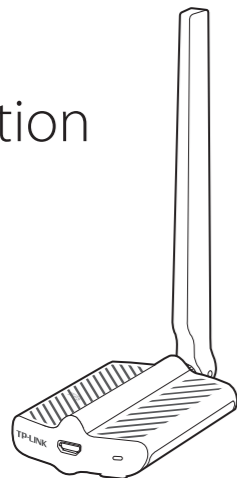

For Mac OS X


## 1 Connect to a Computer

Connect the adapter to a USB port on your computer using the USB cable provided.

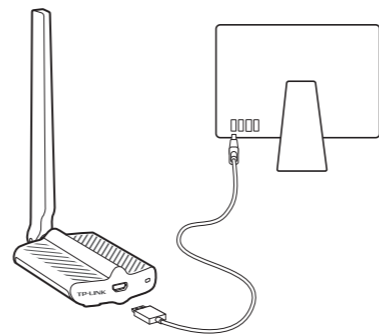

## 2 Install Driver and Utility


- Insert the CD.  
Note:  
You can also download the driver and utility at <http://www.tp-link.com>.
- Browse the CD, go to **Archer T2UHP > Mac OS X Driver**, double click the **TP-LINK\_Installer.dmg** file and run the Installer.
- Follow the wizard to complete the installation.

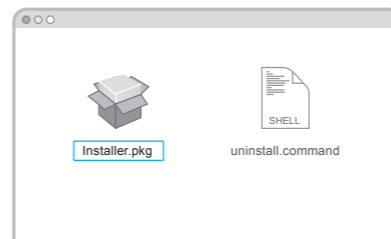

## 3 Join a Wireless Network


### Option 1: Via TP-LINK Utility

- Select the **Site Survey** tab of the pop-up utility window.
- Select your Wi-Fi network and click **CONNECT**. The connection status can be viewed on the Link Status screen.

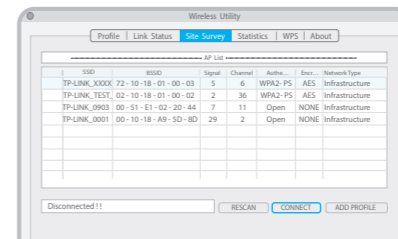

### Option 2: Via Wi-Fi Protected Setup (WPS)

- Press the WPS button on your router.
- Within 2 minutes, press and hold the WPS button on the adapter until the WPS progress indicator bar appears.

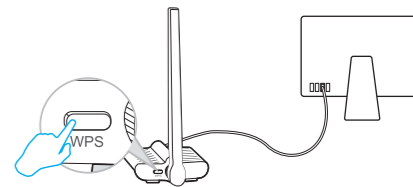


- When you are prompted "PBC - Get PBC profile successfully", it is completed.

## For Windows

### 1 Connect to a Computer

Connect the adapter to a USB port on your computer using the USB cable provided.



Note:  
In Windows XP, a **Found New Hardware Wizard** window will appear when the adapter is detected. Please click **Cancel**.

This USB Adapter can only be powered by computers that comply with Limited Power Source (LPS).

### 2 Install Driver and Utility

a. Insert the CD and run the **Autorun.exe** from the pop-up Autoplay window.


Notes:

1. You can also download the driver and utility at <http://www.tp-link.com>.
2. In some operating systems, the CD screen will pop up automatically. Otherwise, run the CD manually.

b. Select **Archer T2UHP** and click **Install Driver**, then follow the InstallShield Wizard to complete the installation.



Note:

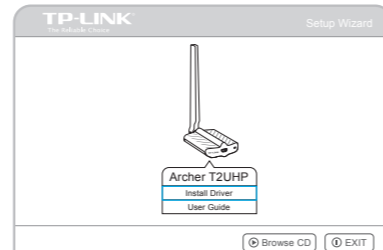
During the installation, select **TP-LINK Wireless Configuration Utility and Driver** if you want to use TP-LINK Utility and WPS function.




### 3 Join a Wireless Network


#### Option 1: Via Windows Wireless Utility

Click  or  (Network icon) on the task bar, select your Wi-Fi network, and click **Connect**.

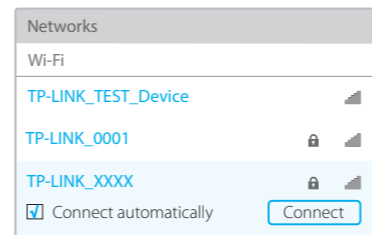


#### Option 2: Via TP-LINK Utility

Select your Wi-Fi network from the utility window and click **Connect**. The symbol  indicates a successful connection.

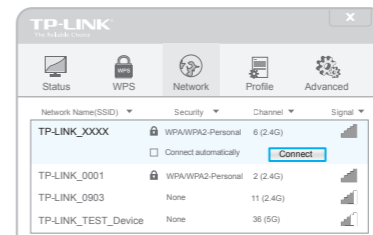

#### Option 3: Via Wi-Fi Protected Setup (WPS)

- a. Press the WPS button on your router.
- b. Within 2 minutes, press and hold the WPS button on the adapter until the configuring screen appears.

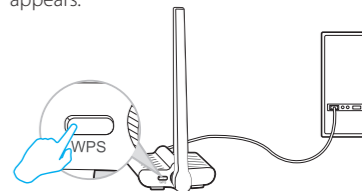

- c. When you are prompted "Successfully connected to the network by WPS!", click **OK**.



For more information, please visit our website  
<http://www.tp-link.com>

©2016 TP-LINK