

0.5M Low-loss N-Type Male to RP-SMA Male Pigtail Cable

MODEL: TL-ANT200PT Datasheet



Features

- -Compliant with 2.4GHz 802.11 n/g/b & 5GHz 802.11 n/a
- -Weatherproof cable-designed for outdoor exposure
- -Manufactured using 0.5m low loss cable providing better performance in the 5GHz & 2.5GHz applications and suitable for the same use as LMR $^{\circ}$ -200*
- -N-Type Male to RP-SMA Male connector, applicable in most of connections between wireless AP/Router and antenna

Description

The TL-ANT200PT pigtail cable is ideal for flexible connection between outdoor cable/antenna and wireless access point/router. It is very easy to use, no configuration or software installation required.


Specifications

Frequency	DC ~ 6GHz
Impedance	50Ω Nominal
Insertion Loss	2GHz 0.7dB
	2.5GHz 0.8dB
	3GHz 1.0dB
	5GHz 1.2dB
	5.5GHz 1.3dB
	6.0GHz 1.4dB
VSWR (MAX.)	0~3GHz: 1.5:1 Max.
	3~6GHz: 1.6:1 Max
Length	0.5m(1.64ft)
Connector Type	N-Type Male to RP-SMA Male
Operating Temp	-10°C~+60°C
Storage Temp	-40°C~+80°C

Diagram

Outdoor Point to Point Application

Simple and Convenient Installation with Excellent Transmission Range

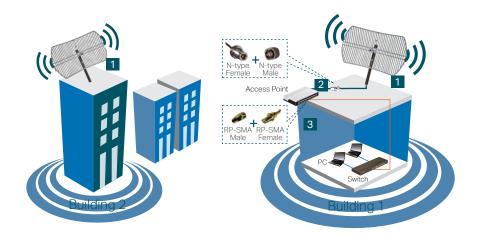

Package:

- 0.5M Low-loss N-Type Male to RP-SMA Male Pigtail Cable TL-ANT200PT

Related Products:

- Access Point
- 2.4GHz 24dBi Grid Parabolic Antenna TL-ANT2424B

1 TL-ANT2424B
Antenna
2 TL-ANT200PT
Extension Cable

3 Access Point

www.tp-link.com

