




Smart Wi-Fi Dimmer Switch

3-Way Kit

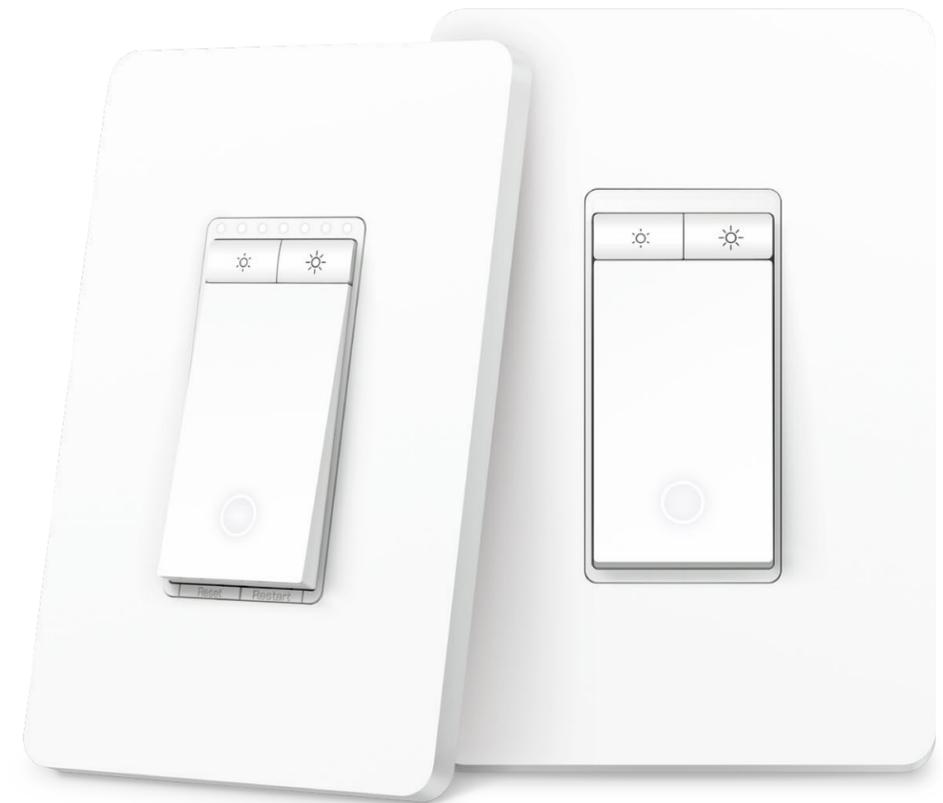

KS230 Kit V2



Full Range
Brightness



Three-Way
Control



Voice
Commands



Fade On/Off

Highlights

Smart Dimming from Anywhere


Set the perfect ambiance for any activity by dimming your light from 100% to 1% via your phone or simple voice commands. Just replace your traditional 3-way switches that control the same light—whether in your living room, hallway, or stairway.



Note: The app screen depicted is for visual reference only and does not necessarily represent actual product operation or app appearance.

Smart 3-Way Control

Replace traditional 3-way switches commonly found in living rooms, stairways, and hallways with something smarter from Kasa Smart. Manually control your lights from two separate locations. Remotely turn your lights on and off, adjust light brightness, set schedules and timers all from your smartphone.

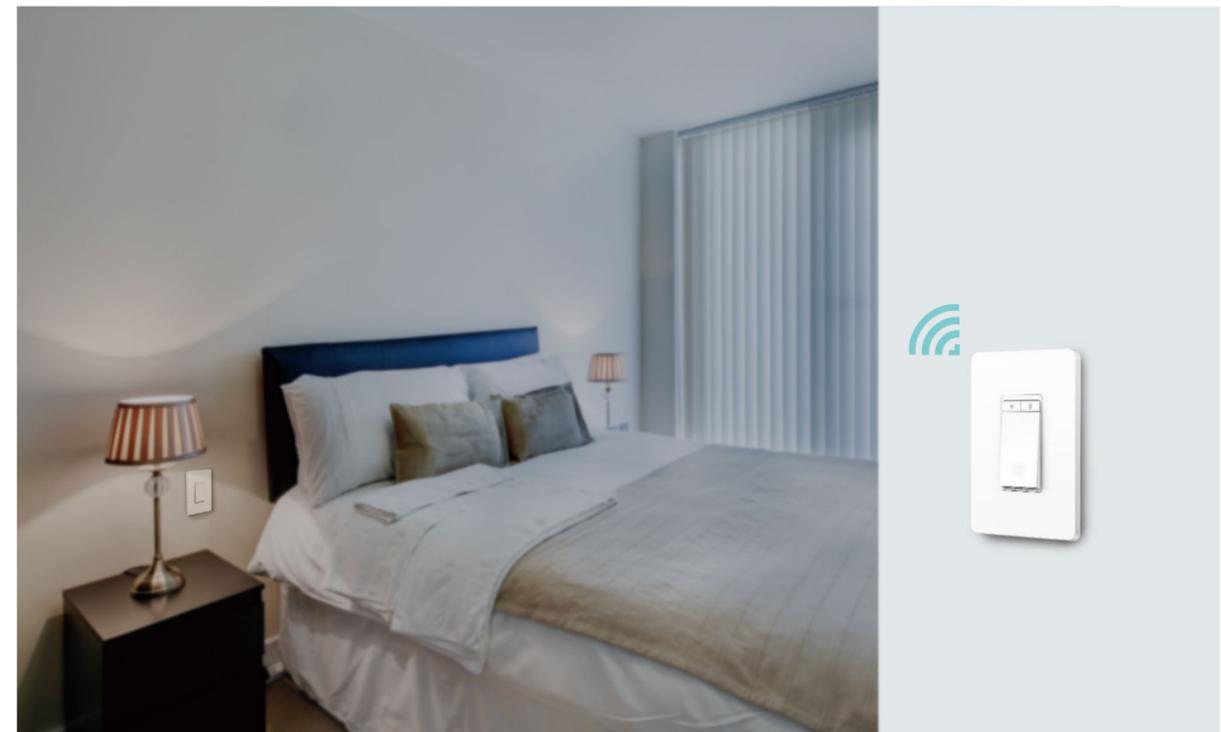

Hands-free Voice Control

Connect your Smart 3-Way Dimmer Switch with Amazon Alexa, Google Home, or Samsung SmartThings, and adjust lighting levels hands-free using only your voice.




Smart Features

- Scheduling – Set your dimmer to turn on and off automatically while you're home or away.
- Smart Actions – Seamlessly control every Kasa device in a room with one touch of the smart switch.
- Full-Range Brightness – Adjust the brightness to set the perfect ambiance for any activity.
- Fade On/Off – Turn the lights on and off gradually, reduce the strain on your eyes.



Wiring Diagram of KS230 Kit V2 3-Way Smart Dimmer Switch

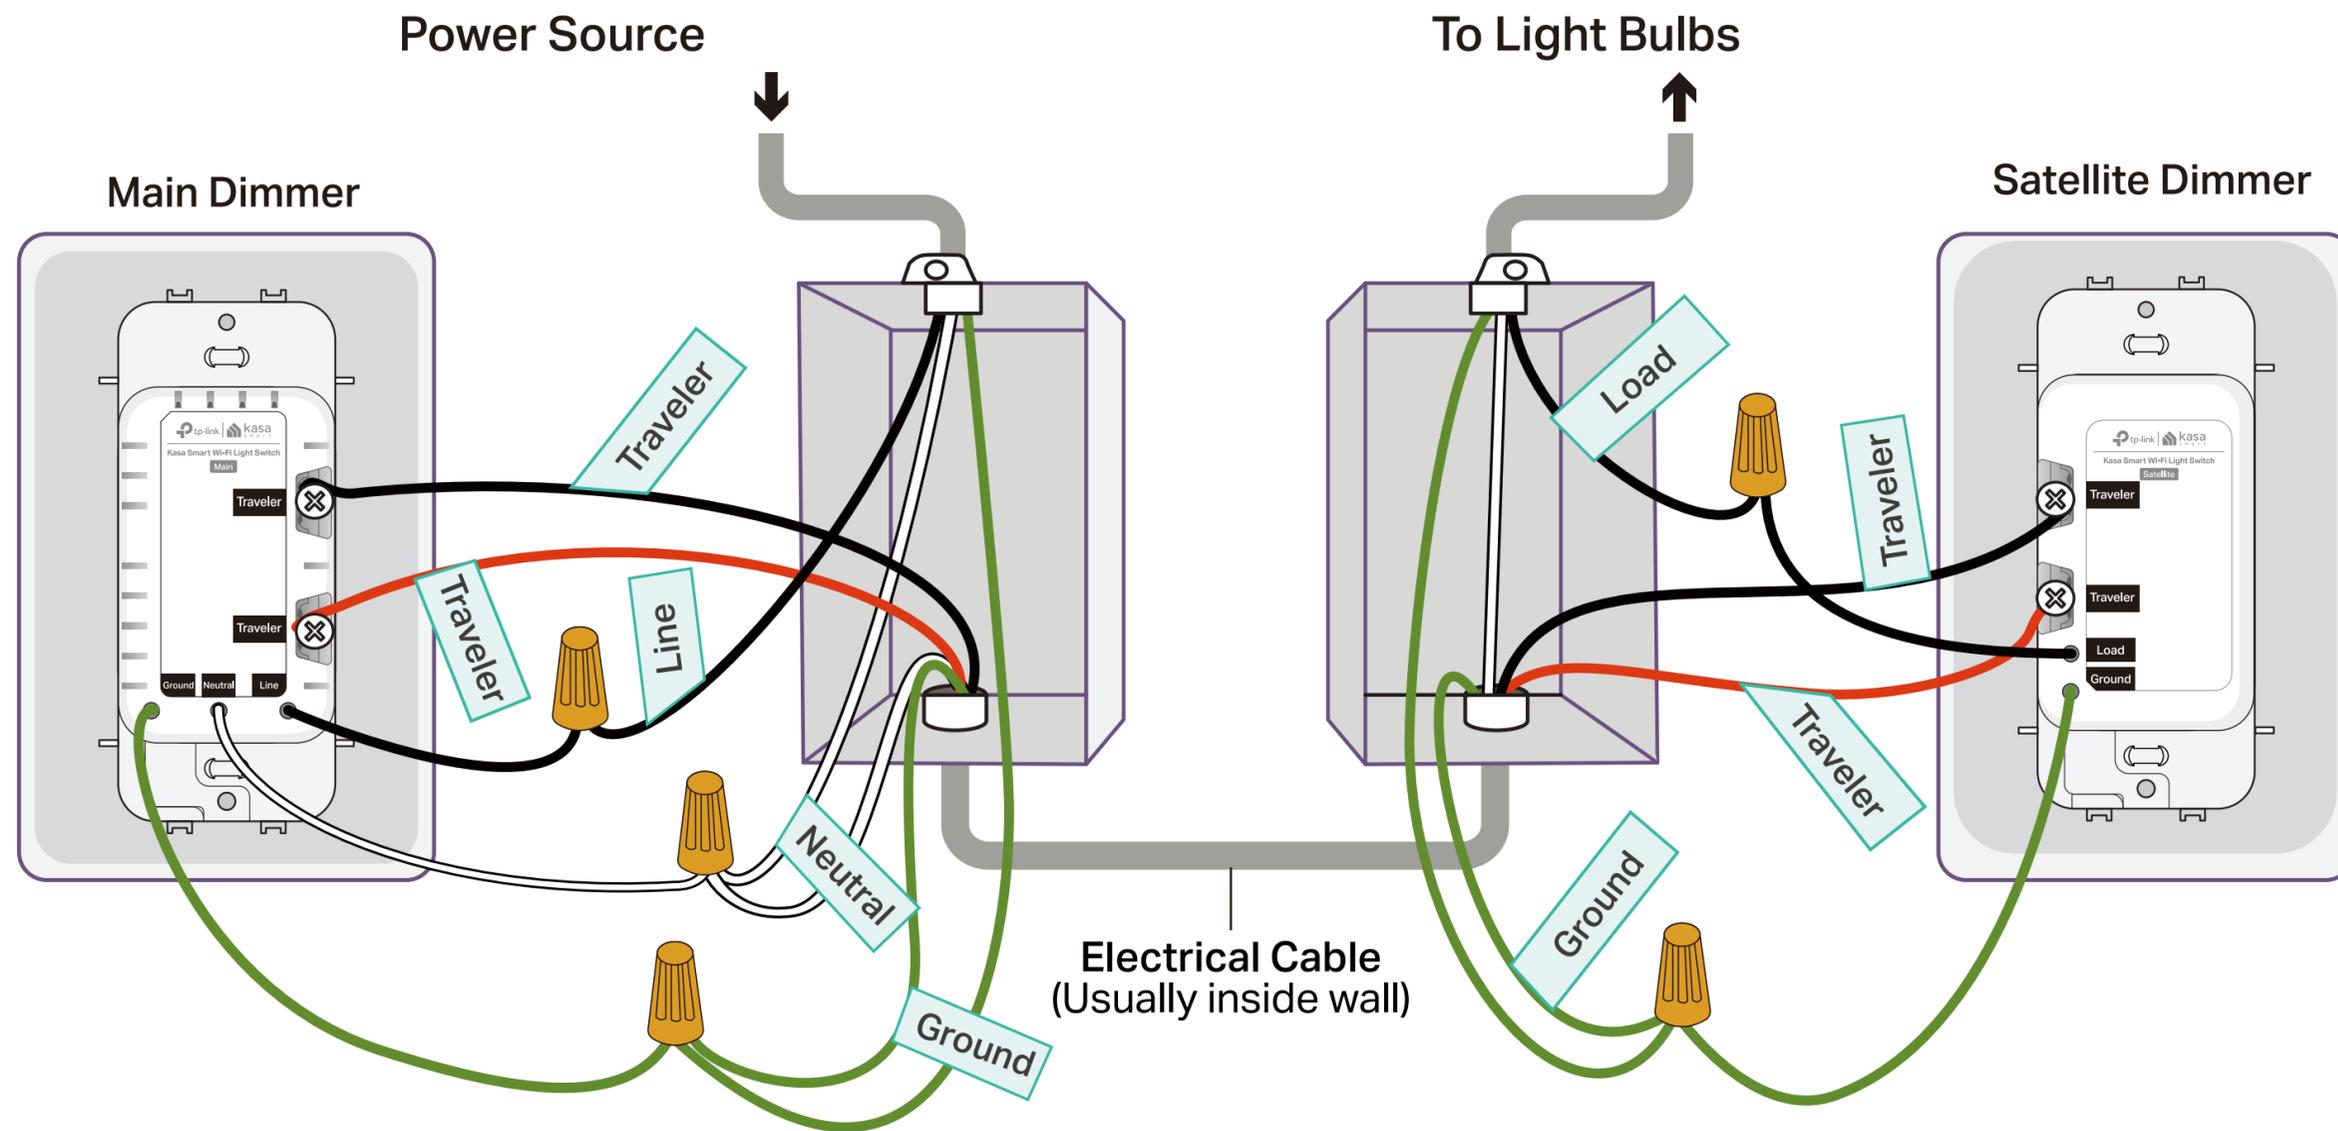

Note:

This wiring diagram only applies to the KS230 Kit V2. No need to distinguish between the two traveler wires.

KS230 Kit requires both units to be used together in order to function in a 3-way installation. The main and satellite dimmers do not work separately or with traditional 3-way switches. It cannot be used in a 4-way configuration.

Specifications

Electrical

- Input Voltage: 120VAC 60Hz
- Output Voltage: Dimmed (120VAC Max)
- Supported Bulb Types:
 - Dimmable LED (MLV) - 150W Max
 - Incandescent - 300W Max
- Dimming Type: Leading Edge Dimming / TRIAC Phase Cut
- * It's also suggested to contact the bulb's Support to check the supported dimming type of the bulb.
- Power Consumption & Standby Power Consumption: 1.5W
- Neutral wire connection required
- Standard lighting wall box (at least 2 inches deep)

Communication

- Secured home Wi-Fi connection required
- Wi-Fi Protocol: IEEE 802.11b/g/n
- Wi-Fi Frequency: 2.4 GHz Wi-Fi only

General

- Dimensions:
 - Main: 5.06 x 3.33 x 1.77 in. (128.65 x 84.65 x 44.9 mm)
 - Satellite: 5.06 x 3.33 x 1.42 in. (128.65 x 84.65 x 36.05mm)
- Indoor Use Only
- Buttons:
 - Main: On/Off Switch, Brightness Up/Down, Reset, Restart
 - Satellite: On/Off Switch, Brightness Up/Down
- Operating Temperature: 0 °C ~ 40 °C (32°F ~ 104°F)
- Operating Humidity: 10%~90%RH, Non-condensing
- Certifications: FCC, IC, ETL, RoHS

Package Contents

- 1× Smart Wi-Fi Dimmer Switch
- 1× Satellite Dimmer Switch
- 2× Wall Plates
- 5× Wire Nuts
- 1×Quick Start Guide

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. The Works with SmartThings words and logo are trademarks of Samsung Electronics Co. Ltd.
©2022 TP-Link

www.tp-link.com