

PHAROS

2x2 MIMO Sector Antenna

MODELS: TL-ANT2424MD/TL-ANT5830MD Datasheet



Highlights


- High gain directional operation, long distance transmission, ideal for Point to Point backhaul connection
- Easy Installation, seamlessly integrated with the Pharos Base Station
- MIMO technology for higher throughput
- Weatherproof design provides protection in harsh environments

Description

The Pharos Dish Antenna is a 2x2 MIMO Dish Antenna that is ideal for outdoor use when attached to a Pharos Base Station. These antennas, which feature high-gain directional transmission patterns, are excellent for building long distance Point-to-Point link.

Scenarios/Topology

A TL-ANT5830MD or TL-ANT2424MD, installed with a Pharos Base Station, is ideal for supporting long distance Point-to-Point data transmission.

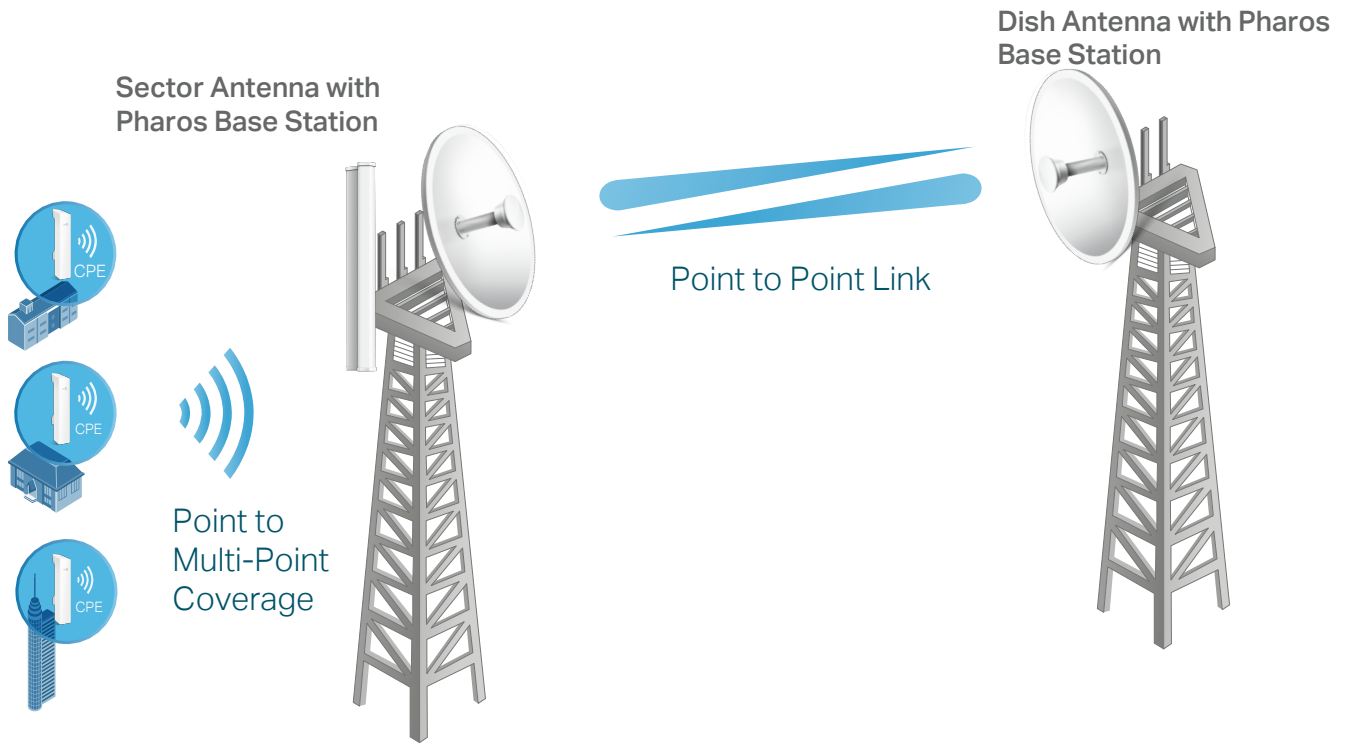

Easy Installation

Designed with a built-in mount, TP-LINK dish antenna (TL-ANT5830MD/TL-ANT2424MD) work seamlessly with Pharos Base Stations and no tools are required for installation.




Specifications

	TL-ANT2424MD
Frequency Range	2.3 ~ 2.7 GHz
Gain*	24dBi
VSMR	1.8 Max
HPOL Beamwidth (3dB)	6°
VPOL Beamwidth(3dB)	6°
Elevation Beamwidth (3dB)	6°
F/B Ratio	32dB Min
Impedance	50Ω
Interfaces	RP-SMA Female
Polarization	Horizontal & Vertical
Mounting	Pole Mount
Survival Wind Speed	241 Km/h
Standards	RoHS, WEEE


*Exclude Cable Loss

Radiation patterns


Horizontal Azimuth

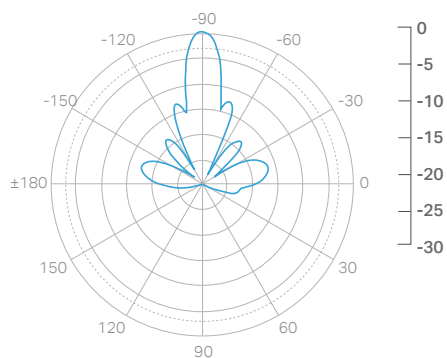


Vertical Azimuth

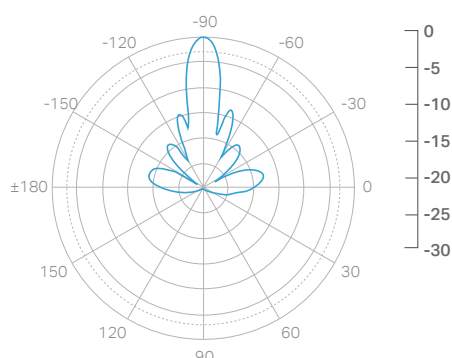

Horizontal Elevation

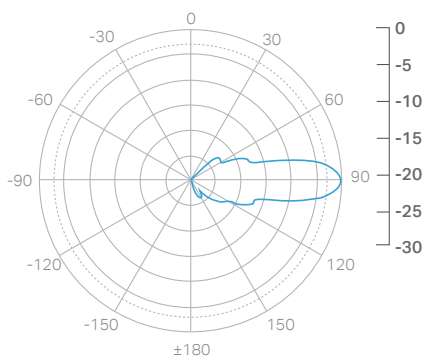

Vertical Elevation

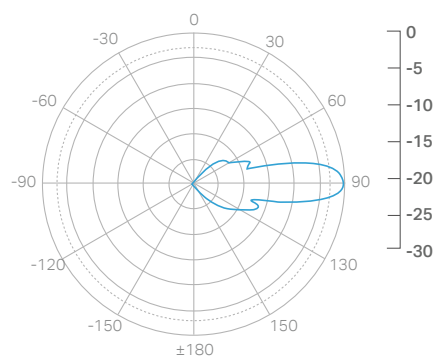


Specifications

	TL-ANT5830MD
Frequency Range	5.0 ~ 6.0 GHz
Gain*	30dBi
VSMR	1.8 Max
HPOL Beamwidth (3dB)	6°
VPOL Beamwidth(3dB)	6°
Elevation Beamwidth (3dB)	6°
F/B Ratio	34dB Min
Impedance	50Ω
Interfaces	RP-SMA Female
Polarization	Horizontal & Vertical
Mounting	Pole Mount
Survival Wind Speed	241 Km/h
Standards	RoHS, WEEE


*Exclude Cable Loss

Radiation patterns


Horizontal Azimuth

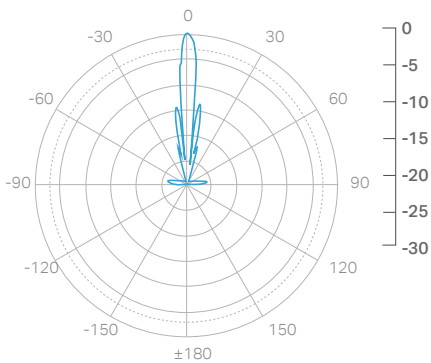


Vertical Azimuth

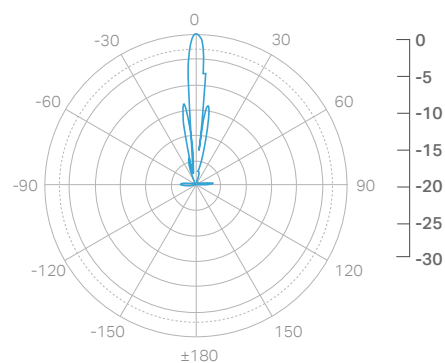

Horizontal Elevation

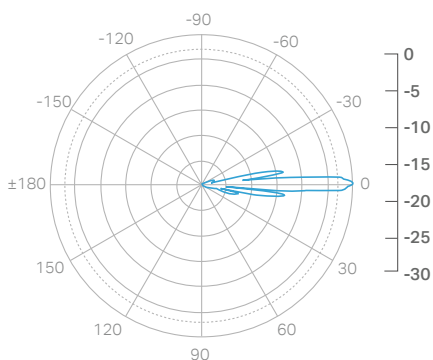

Vertical Elevation

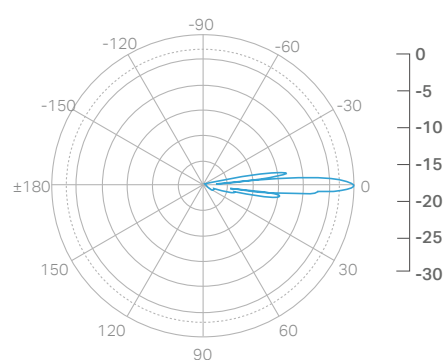

Ordering Information

Ideal to use with



- 2.4GHz 300Mbps Outdoor Wireless Base Station WBS210



- 5GHz 300Mbps Outdoor Wireless Base Station WBS510

Related Products



- 2.4GHz/5GHz 300Mbps 9/13dBi Outdoor CPE CPE210 /CPE510



- 2.4GHz 15dBi/ 5GHz 19dBi 2x2 MIMO Sector Antenna TL-ANT2415MS/TL-ANT5819MS

www.tp-link.com

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2017 TP-Link Technologies Co., Ltd. All rights reserved.