



# Pigtail Cable

MODEL: TL-ANT24PT3 Datasheet



## Features

- Easy to install and use
- Manufactured using 3m Low Loss CFD-200 cable that provides a higher performance cable with excellent flexibility
- N Male to RP-SMA Male connector, applicable in most of connections between the wireless AP/Router and antenna

## Description

The TL-ANT24PT3 pigtail cable is ideal for flexible connection between rigid outdoor cable and wireless access points/routers. It is very easy to use, no configuration or installation software required.


# Specifications

Frequency	DC ~ 3GHz
Impedance	50Ω Nominal
Insertion Loss	2.9 dB
VSWR (MAX.)	1.5:1 Max.
Connector Type	N Male to RP-SMA Male
Operating Temp	-10°C~+60°C
Storage Temp	-40°C~+80°C

# Diagram

## Outdoor Point to Point Application

Simple and Convenient Installation with Excellent Transmission Range

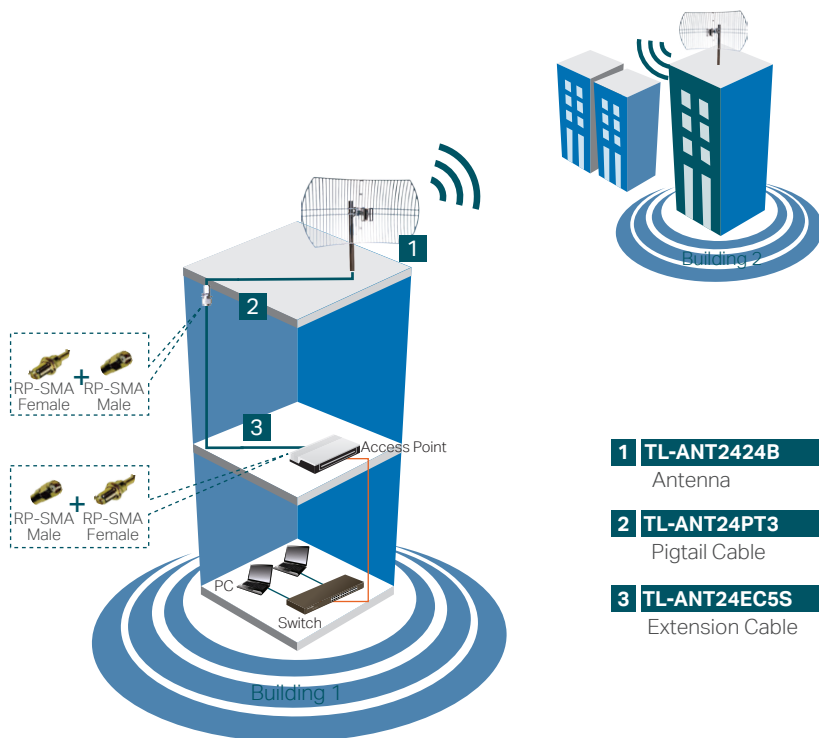

## Package

- Pigtail Cable  
TL-ANT24PT3

[www.tp-link.com](http://www.tp-link.com)

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2017 TP-Link Technologies Co., Ltd. All rights reserved.