

Festa AP | Datasheet

Festa F65

AX3000 Ceiling Mount Wi-Fi 6 Access Point




Festa Solution

Festa unifies APs, switches, and routers for full cloud-based management, offering an easy, effective, and reliable business-level network controlled via app or web. Perfect for small businesses, home offices, and cafes.

Easy Setup and Use

Free Cloud Centralized Management*

Easy Maintenance

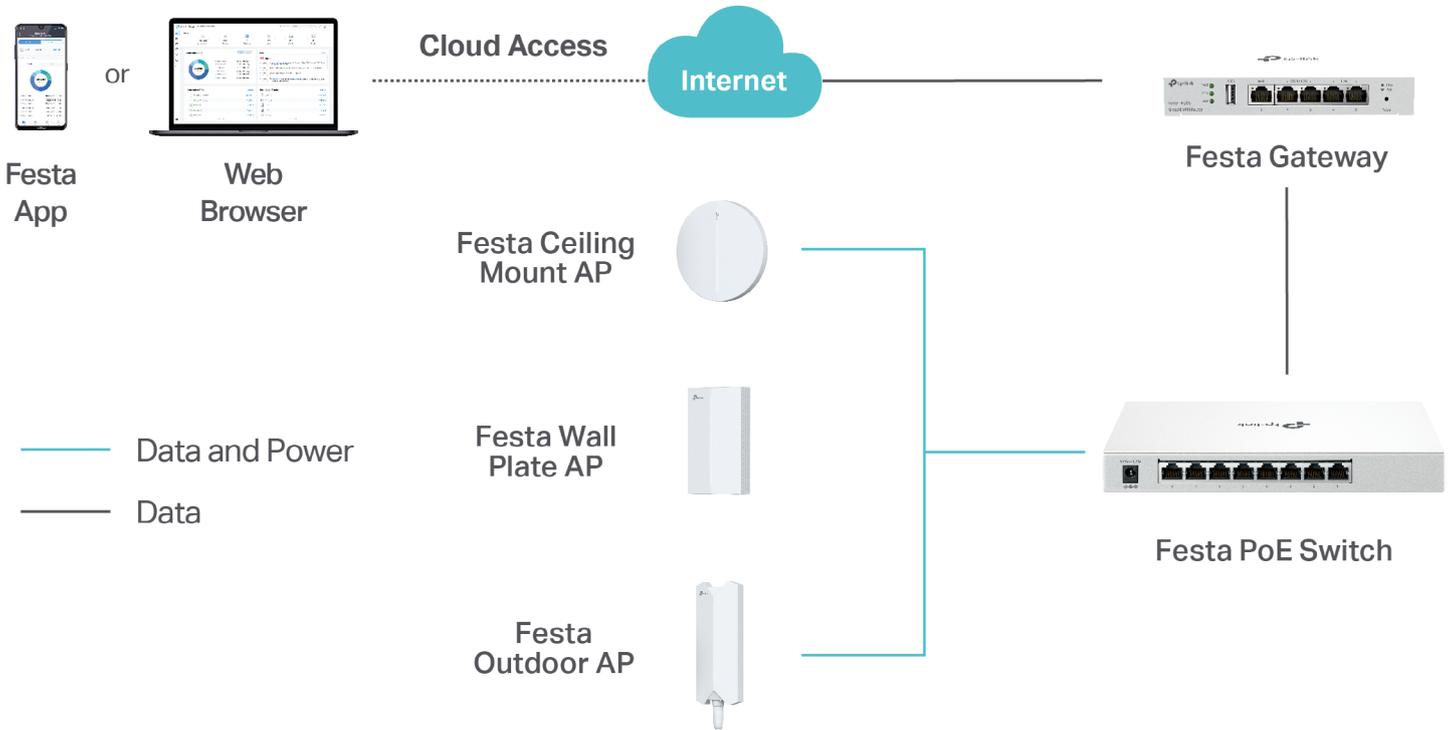

Specifications

Model		Festa F65	
Name		AX3000 Ceiling Mount Wi-Fi 6 Access Point	
Main Design	LAN Interfaces	1x Gigabit Ethernet Port	
	Wi-Fi Standards	IEEE 802.11 a/b/g/n/ac/ax	
	Maximum Data Rate	574 Mbps (2.4 GHz) +2402 Mbps (5 GHz)	
	Wireless Client Capacity	250+	
	Antennas	2.4 GHz: 2x 3 dBi 5 GHz: 3x 5 dBi (one auxiliary antenna included)	
	Transmit Power	CE: < 20 dBm(2.4 GHz, EIRP); <23 dBm (5 GHz,band 1&band 2,EIRP); < 27 dBm(5 GHz, band 3,EIRP); FCC: < 24 dBm(2.4 GHz); < 25dBm (5 GHz)	
Security	Reception Sensitivity	2.4G: 11ax HE20MCS0:-95.5dBm; 11ax HE20MCS11:-66dBm; 11ax HE40MCS0:-93.5dBm; 11ax HE40MCS11:-63.5dBm 5G: 11ax HE20MCS0:-94dBm; 11ax HE20MCS11:-64dBm; 11ax HE40MCS0:-91.5dBm; 11ax HE40MCS11:-61.5dBm; 11ax HE80MCS0:-88.5dBm; 11ax HE80MCS11:-59dBm; 11ax HE160MCS0:-85.5dBm; 11ax HE160MCS11:-56.5dBm	
	Centralized Management	Festa Cloud-Based Controller • Festa App •	
	Security	Captive Portal Authentication	•
		Access Control	•
		Maximum Number of MAC Filter	4000
		Wireless Isolation between Clients	•
VLAN		•	
Rogue AP Detection		-	
Wireless Encryption		WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise	
802.1X Support	•		

Model		Festa F65
Wireless Function	Multiple SSIDs	16 (8 on each band)
	Channel	EU: 2G:1-13; 5G: 36,40,44,48,52,56,60,64,100,104,108,112,116,120,124,128,132,136,140 US: 2G:1-11; 5G: 36,40,44,48,52,56,60,64,100,104,108,112,116,120,124,128,132,136,140,149,153,157,161,165
	Enable/Disable Wireless Radio	•
	Enable/Disable SSID Broadcast	•
	Guest Network	•
	Automatic Channel Assignment	-
	Transmit Power Control	Adjust transmit Power on dBm
	QoS (WMM)	•
	Seamless Roaming	•
	Mesh	•
	Beamforming	•
	MU-MIMO	2*2 MU-MIMO DL&UL
	MIMO	2*2 (2.4G and 5G) MU-MIMO 2*2 (2.4G and 5G) SU-MIMO
	OFDMA	OFDMA UL/DL
	Rate Limit	Based on SSID/Client
	Load Balance	•
	Airtime Fairness	•
	Band Steering	•
	RADIUS Accounting	•
	MAC Authentication	-
	Reboot Schedule	-
Wireless Schedule	•	
Wireless Statistics	-	
Static IP/Dynamic IP	•	
Support Data Rates	802.11ax	8 Mbps to 2402 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80/160)
	802.11ac	6.5 Mbps to 2166.7 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80/160)
	802.11n	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)
	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11b	1, 2, 5.5, 11 Mbps
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps

Model		Festa F65
Management	LED ON/OFF Control	•
	Management MAC Access Control	•
	Web-based Management	-
	SNMP	v1, v2c, v3
	SSH	•
	Restore & Backup	-
	Firmware update via Web	-
	NTP	•
	System Log	•
	Email Alerts	-
Physical & Environment	Power Supply	48V Passive PoE or 802.3at PoE or 12V/1.2A DC
	Maximum Power Consumption	EU: 13.3 W (For PoE); 11.8 W (for DC) US: 14.7 W (For PoE); 12.6 W (for DC)
	Reset	•
	Mounting	Ceiling / Wall mouting (Kits included) / Junction Box mouting
	Certifications	CE, FCC, RoHS, IC
	Dimensions (W x D x H)	160 x 160 x 38.5 mm
	Net Weight	372g
	Enclosure Material / Rack Material	Top cover: PC Bottom shell: aluminum alloy Mounting rack: stainless steel
	Lightning Protection	Air discharge: ±8kV Contact discharge: ±4kV Common mode 10/700: ±4kV
	Environment	Operating Temperature: 0 °C–40 °C (32 °F–104 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing;

Disclaimers

- * Festa currently offers free cloud access for centralized management and reserves the right to apply fees in the future.
- * Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed. They will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead; and 3) client limitations, including rated performance, location, connection, quality, and client condition.
- * The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.
- * Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.
- * Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, Internet service provider factors and other environmental conditions.
- * PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.
- * Use of WiFi 6 (802.11ax) and its features, including OFDMA and 1024-QAM, require clients to support the corresponding features.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: <https://www.tp-link.com>. Specifications are subject to change without notice.

© 2024 TP-Link