

Pigtail Cable

TL-ANT24PT

⦿ Features:

- Easy to install and use
- Manufactured using 50cm Low Loss CFD-200 cable that provides a higher performance cable with excellent flexibility
- N Male to RP-SMA Male connector, applicable in most of connections between the wireless AP/Router and antenna
- 50cm low loss CFD-200 cable



⦿ Description:

The TL-ANT24PT pigtail cable is ideal for flexible connection between rigid outdoor cable and wireless access points/routers. It is very easy to use, no configuration or installation software required.


⦿ Specifications:

Frequency	DC ~ 3GHz
Impedance	50Ω Nominal
Insertion Loss	0.8 dB
VSWR (MAX.)	1.5:1 Max.
Connector Type	N Male to RP-SMA Male
Operating Temp	-10 °C ~ +60 °C
Storage Temp	-40 °C ~ +80 °C

Diagram:

Outdoor Point to Point Application

Simple and Convenient Installation with Excellent Transmission Range

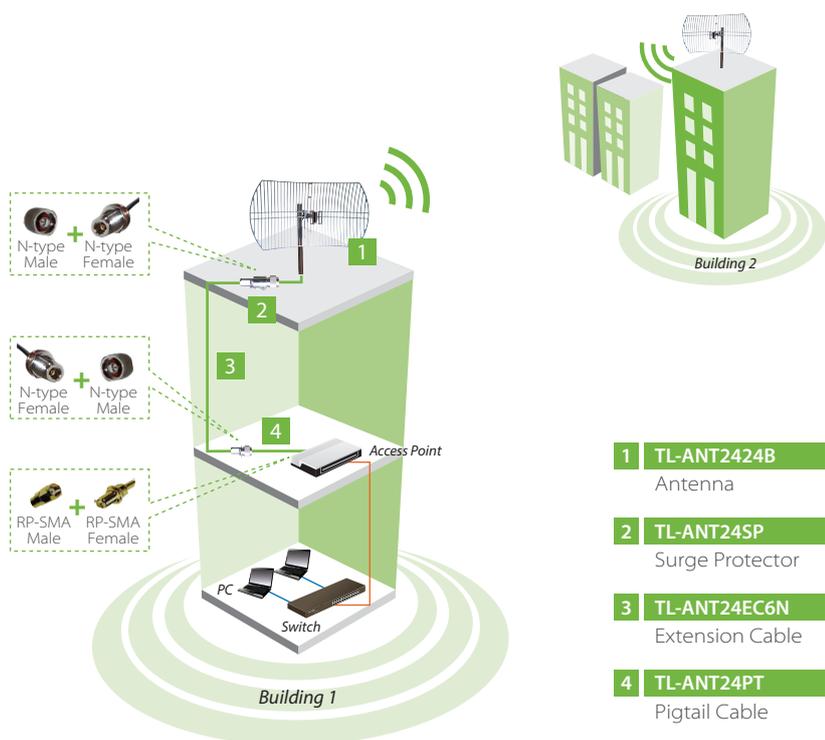

Package:

- Pigtail Cable
TL-ANT24PT