

# Quick Installation Guide

N600 Wireless Dual Band PCI Express Adapter


MODEL NO. TL-WDN3800

7106505431 REV2.0.0



For more information, please visit <http://www.tp-link.com>.

## 1 Connect to a Computer

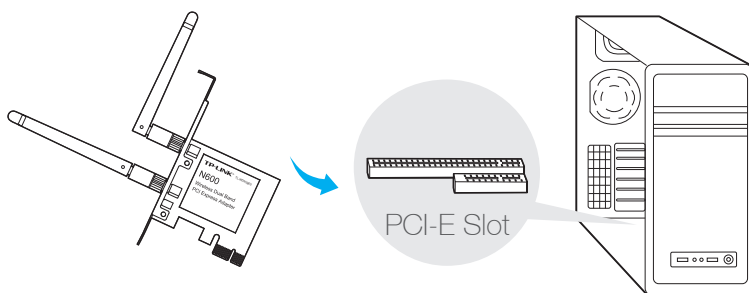

Insert the adapter into your computer by following these steps:


1. Install the antennas.
2. Turn off your computer, unplug the power cord and other connected peripheral devices to your computer.
3. Remove the case panel. Locate an available PCI-E slot and remove its slot cover.
4. Carefully insert the adapter into the PCI-E slot and secure it with the retaining screw.
5. Replace the case panel.
6. Reconnect the power cord and turn on your computer.

Note: In Windows XP, a Found New Hardware Wizard window will appear when the adapter is detected. Please click **Cancel**.

## 2 Install Driver and Utility


You can also download the driver and utility at [www.tp-link.com](http://www.tp-link.com)

**A:** Insert the CD and run the Autorun.exe from the pop-up Autoplay window.



Note: In some operating systems, the CD screen will pop up automatically. Otherwise, run the CD manually.



**B:** Select TL-WDN3800 and click **Install Driver and Utility**, then follow the InstallShield Wizard to complete the installation.

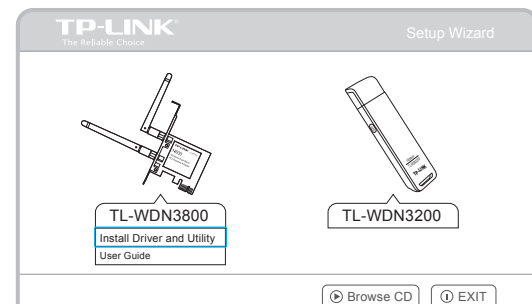

## 3 Join a Wireless Network

**Option 1:** Via TP-LINK Utility

Select your preferred Wi-Fi network from the pop-up utility window and click **Connect**. The symbol indicates a successful connection.

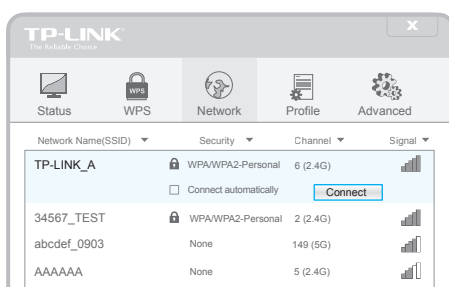

**Option 2:** Via Windows Wireless Utility

Click (Network icon) on the system tray, select your Wi-Fi network, and click **Connect**.

Note: In Windows XP, you need to close the TP-LINK Utility before using the Windows Wireless Utility.