

Quick Installation Guide

300Mbps High Power Wireless N Router


TL-WR841HP

7106505420 REV2.0.0

Connect the Hardware

If your Internet connection is through an Ethernet cable from the wall instead of through a DSL / Cable / Satellite modem, connect the Ethernet cable directly to the router's INTERNET port, then follow steps 4 and 5 to complete the hardware connection.

1 Install the antennas to the router and then use the supplied bracket to fix the position of the antennas in place for best Wi-Fi performance.

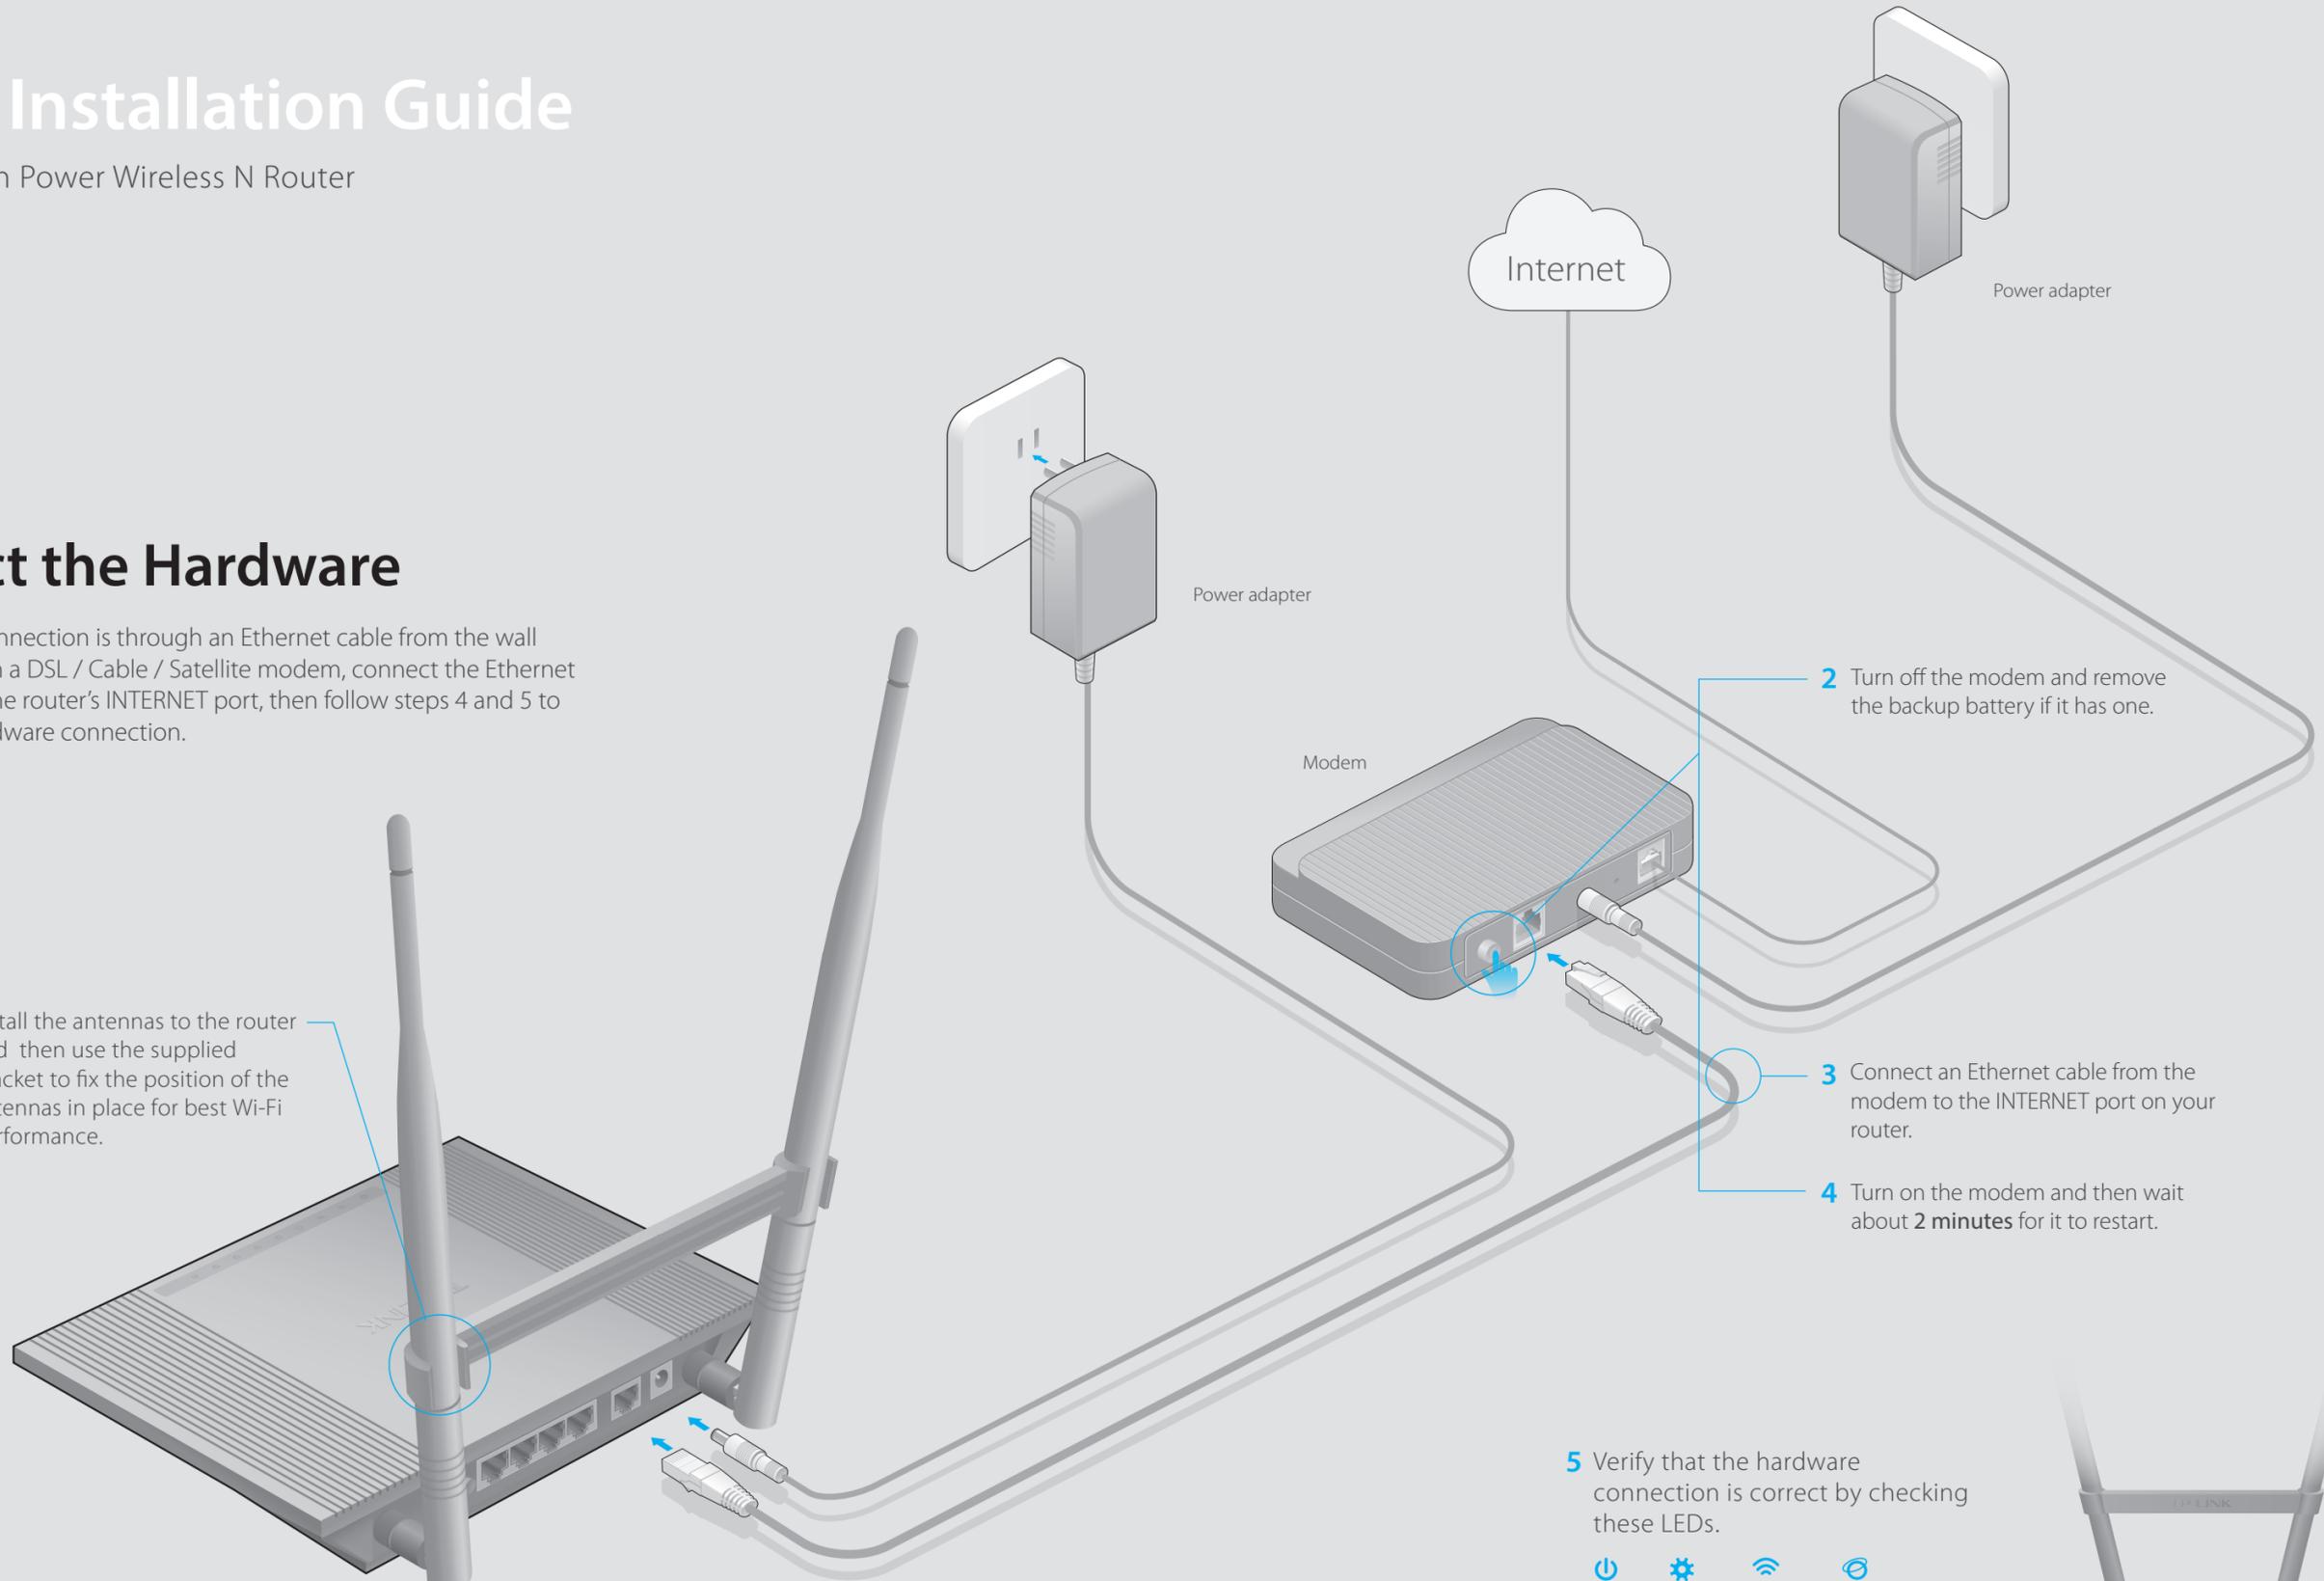

2 Turn off the modem and remove the backup battery if it has one.

3 Connect an Ethernet cable from the modem to the INTERNET port on your router.

4 Turn on the modem and then wait about **2 minutes** for it to restart.

5 Verify that the hardware connection is correct by checking these LEDs.

- Power On
- System Flashing
- WLAN Flashing
- WAN On/Flashing




Configure the Router

1. Connect your computer to the router (Wired or Wireless)

Wired

Turn off Wi-Fi on your computer and connect the devices as shown below.

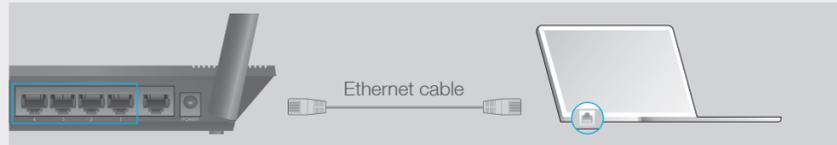

Wireless

Connect wirelessly by using the SSID (Network Name) and Wireless Password/PIN printed on the product label at the bottom of the router.




2. Configure the router using a web browser or the CD Setup Wizard


Option 1: Via a web browser

- A** Enter <http://tplinkwifi.net> or <http://192.168.0.1> in the address bar of the web browser. Enter **admin** for both username and password, and then click **Login**.

Note: If the login window does not appear, please refer to FAQ > Q1.

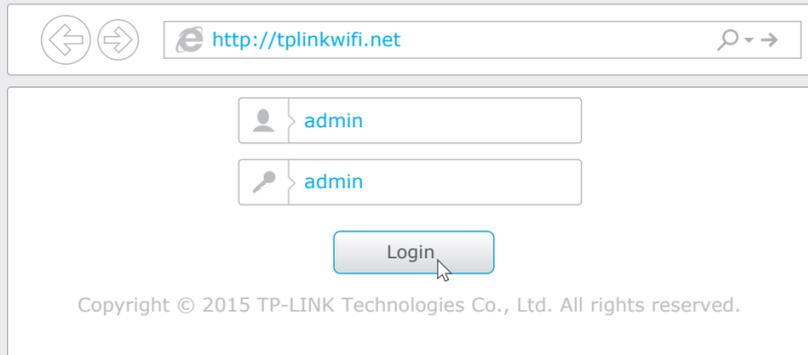


- B** Click **Quick Setup** on the left menu, and click **Next**. Select your **WAN Connection Type**. If you are unsure of your connection type, select **Auto-Detect**. Click **Next** and follow the onscreen instructions.

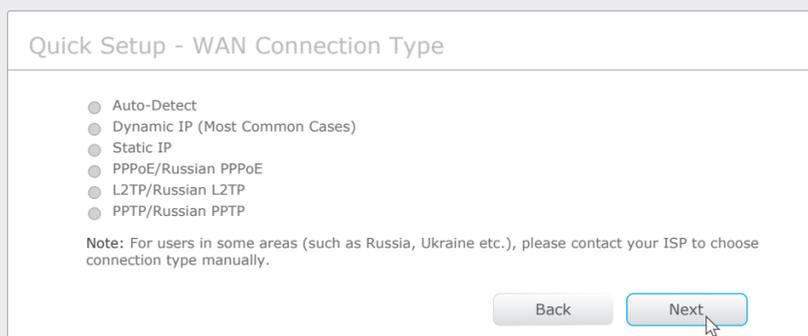


- C** Either use the default or customize your wireless settings, and click **Next**.

Tip: If you change the default SSID and password, write down the new wireless settings.

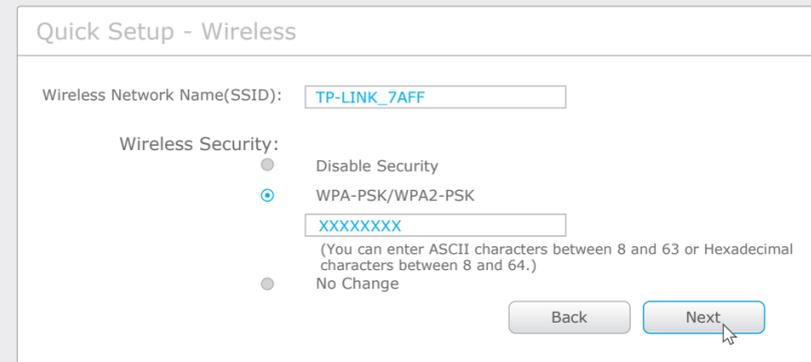

- D** Click **Finish** to complete the Quick Setup.

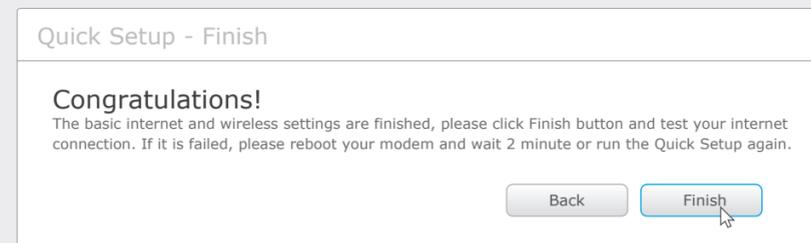


Option 2: Via the CD Setup Wizard (For Windows users only)

Note: **Mac OS and Linux** users, please refer to Option 1 to configure the router using a web browser.

- A** Insert the Resource CD and run the **Autorun.exe** file. Select **TL-WR841HP** and click **Easy Setup Assistant**.



- B** Choose your language and click **START**. Follow the step-by-step screen instructions to complete the configuration.

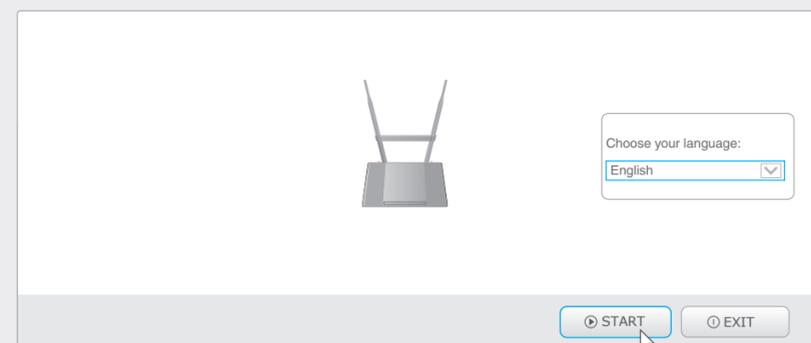

Configure via Tether App

TP-LINK's Tether app lets you conveniently access the router and:

- View information about the clients on your network.
- Block network access from specific users or devices.
- Set up Parental Control with access time and content restrictions.
- Change the basic wireless network settings easily.

How to start?

- 1 Scan the QR code to download the TP-LINK Tether app from the Apple App Store or Google Play.
- 2 Ensure your smart device is wirelessly connected to the home network.
- 3 Launch the Tether app and start managing your home network.



FAQ (Frequently Asked Questions)

Q1. What can I do if the login window does not appear?

- If the computer is set to a static or fixed IP address, change the settings to obtain an IP address automatically.
- Verify if <http://tplinkwifi.net> or <http://192.168.0.1> is correctly entered in the web browser. Alternatively, enter <http://192.168.1.1> in the web browser and press Enter.
- Use another web browser and try again.
- Reboot your router and try again.
- Disable the network adapter used currently and then enable it again.

Q2. What can I do if I cannot access the Internet?

- Check if the Internet is working properly by connecting a computer directly to the modem via Ethernet cable. If not, contact your Internet Service Provider.
 - Open a web browser, enter <http://tplinkwifi.net> or <http://192.168.0.1> and run the setup again.
 - Reboot your router and try again.
- Note: For cable modem users, reboot the modem first. If the problem still exists, log in to the Web Management page of the router, and go to **Network > MAC Clone**, click **Clone MAC Address** and then click **Save**.

Q3. How do I restore the router to its factory default settings?

- While the router is powered on, press and hold the **WPS/RESET** button on the rear panel of the router for approximately 8 seconds.
- Log in to the Web Management page of the router, and go to **System Tools > Factory Defaults**, click **Restore**, and then wait until the progress bar is finished.

Q4. What can I do if I forget my web management page password?

- Refer to FAQ > Q3 to reset the router, and then use the default **admin** (all ilowercase) for both username and password to log in.

Q5. What can I do if I forget my wireless network password?

- If you have not changed the default Wireless Password, it can be found on the product label of the router.
- If you have changed your password, log in to the router's Web Management page, go to **Wireless > Wireless Security** to obtain or reset your password.

If your questions are not answered here, please refer to <http://www.tp-link.com/en/support/faq> and click **Contact Technical Support** for further assistance.