

Wireless N Network Camera

TL-SC2020N

⦿ Features:

- 150Mbps wireless N connectivity brings flexible placement
- MJPEG streams for remote recording and local surveillance
- 1/4 inch progressive scan CMOS sensor produces clear and crisp images, even in low light environment
- Bundled management software accommodates up to 16 cameras at the same time
- Motion triggered e-mail alerts to keep you updated on the situation on the ground
- Frame rate at 30fps in VGA resolution (640 x 480) for smooth video



⦿ Description:


Featuring 150Mbps wireless connectivity, The TL-SC2020N surveillance camera is a versatile solution for home and office surveillance, enabling users to deploy the camera previously inaccessible by Ethernet connection such as on ceilings or walls. It can also be placed in a living room, office or anywhere else to keep an eye on things. After a hassle-free installation, users will be able to view and control the camera from a web browser, bundled software, or a smart phone. Additionally, the TL-SC2020N features basic monitoring tools such as motion detection and E-mail alerts, which is a motion-triggered alert sent when the camera detects movement.

◎ Specifications:

| Camera | |
|-----------------------------|--|
| Image sensor | 1/4" Progressive scan CMOS sensor |
| Digital Zoom | 10x Digital |
| Minimum Illumination | 0.5 Lux |
| Video/Image | |
| Video Compression | Motion JPEG |
| Frame Rate & Resolutions | Up to 30(NTSC) / 25(PAL) fps at 640x480, 320x240, 160x120 |
| Video Streaming | Motion JPEG |
| Image Settings | Rotation: Mirror, Flip, Mirror Flip; Brightness, Contrast, Saturation, Hue; Overlay capabilities: Time, Date, Text and Privacy image |
| Audio | |
| Audio Communication | One-way |
| Audio Input | Built-in microphone |
| Audio Compression | G.711 PCM, 8 kHz, 64 kbit/s |
| Alarm and Event Management | |
| Events Trigger | Built-in motion detection, schedule |
| Notification Method | E-mail, FTP, HTTP |
| Network | |
| Standards and Protocols | TCP/IP, DHCP, PPPoE, ARP, ICMP, FTP, SMTP, DNS, NTP, UPnP, RTSP, RTP, RTCP, HTTP, TCP, UDP, 3GPP/ISMA RTSP |
| Wireless | |
| Wireless Data Rates | IEEE 802.11 b/g/n, Up to 150Mbps |
| Frequency | 2.4-2.4835GHz |
| Wireless Encryption | 64/128/152-bit WEP / WPA / WPA2, WPA-PSK / WPA2-PSK |
| Interface | |
| Network Interface | 1 RJ-45 for Ethernet 10/100 Base-T |
| Power Connector | DC power jack |
| Audio Input | Built-in microphone |
| Button | Reset push button |
| Surveillance Management | |
| Bundled Management Software | Viewing and recording up to 16 cameras |

| General | |
|-----------------------|--|
| External Power Supply | 5VDC, Max 3W |
| Certification | CE, FCC, RoHS |
| Environment | Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing |
| Dimensions (H×W×D) | 96 x 66 x 28 mm (3.8 x 2.9 x 1.1 in.) |

Diagram:

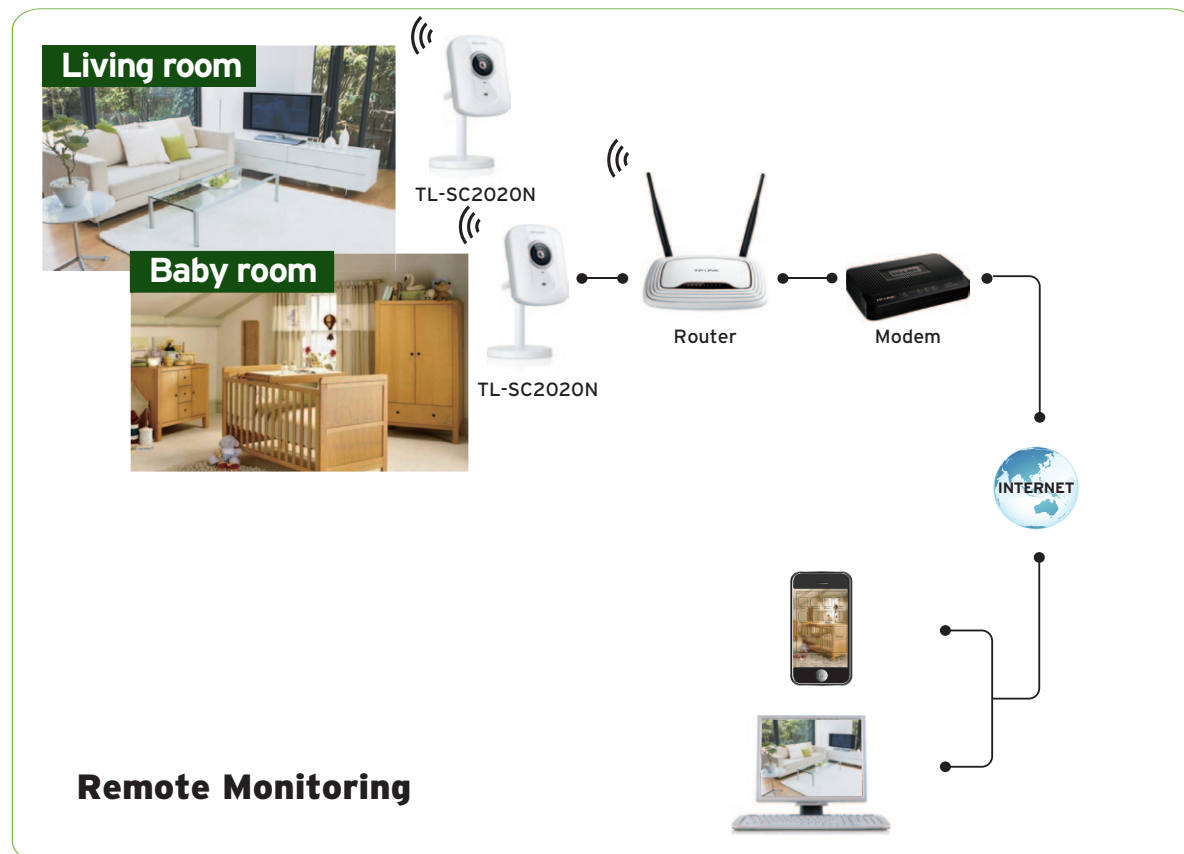

Package:

- Wireless N Network Camera TL-SC2020N
- Power Adapter
- RJ-45 Ethernet Cable
- Quick Installation Guide
- Resource CD
- Camera Mount Kit