

## Network Security Camera

### TL-SC2020

#### ⦿ Features:

- MJPEG streams for remote recording and local surveillance
- 1/4 inch progressive scan CMOS sensor produces clear and crisp images, even in low light environment
- Bundled management software accommodates up to 16 cameras at the same time
- Motion triggered e-mail alerts to keep you updated on the situation on the ground
- Frame rate at 30fps in VGA resolution (640 x 480) for smooth video

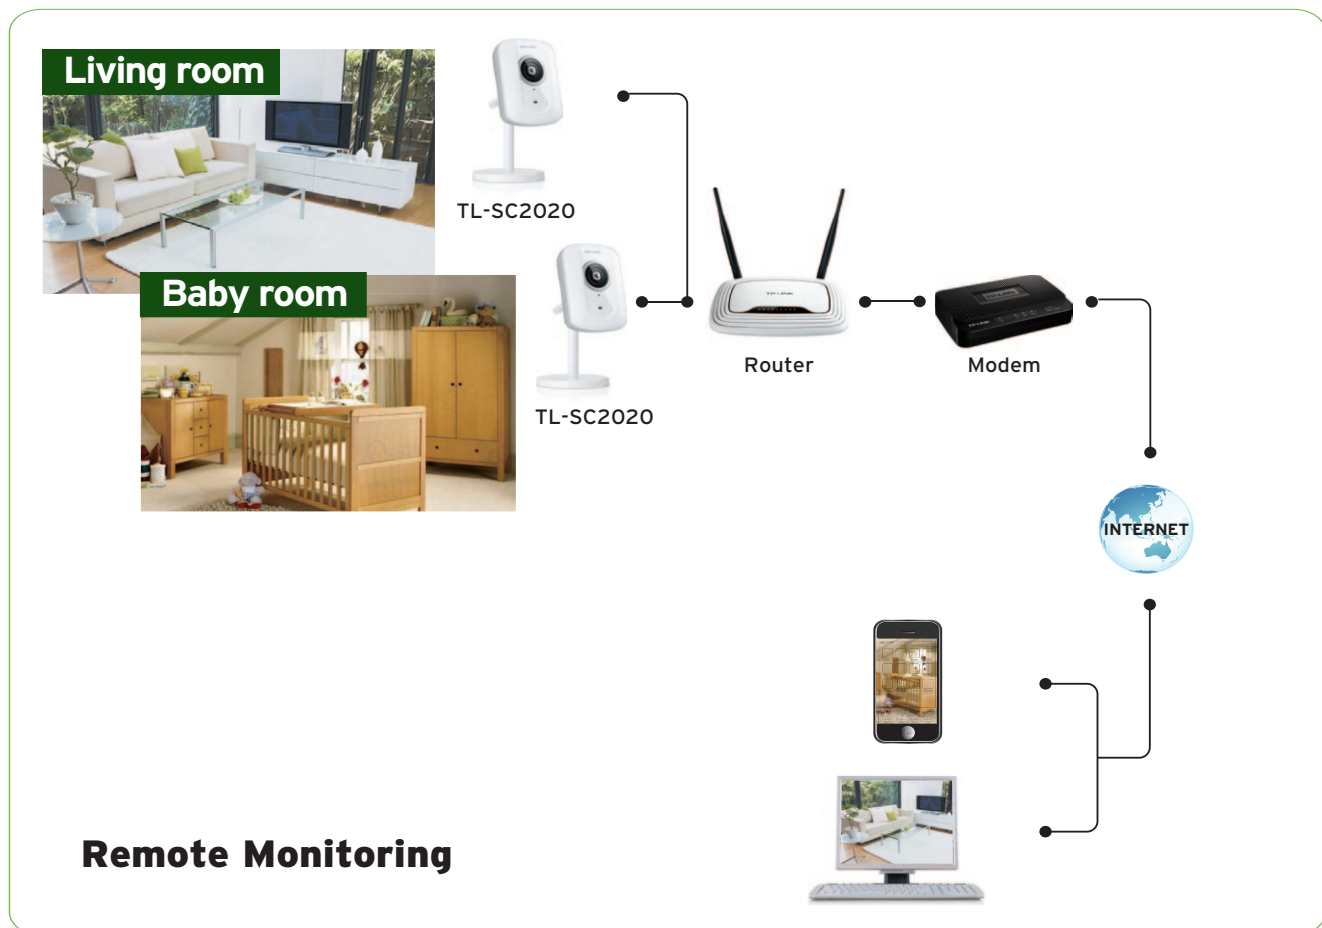


#### ⦿ Description:

The TL-SC2020 surveillance camera is a versatile solution for home and office surveillance, which can be placed in a living room, office or anywhere else to keep an eye on things. After a hassle-free installation, users will be able to view and control the camera from a web browser, bundled software, or a smart phone. Additionally, the TL-SC2020 features basic monitoring tools such as motion detection and E-mail alerts, which is a motion-triggered alert sent when the camera detects movement.

## ◎ Specifications:

Camera	
Image sensor	1/4" Progressive scan CMOS sensor
Digital Zoom	10x Digital
Minimum Illumination	0.5 Lux
Video/Image	
Video Compression	Motion JPEG
Frame Rate & Resolutions	Up to 30(NTSC) / 25(PAL) fps at 640x480, 320x240, 160x120
Video Streaming	Motion JPEG
Image Settings	Rotation: Mirror, Flip, Mirror Flip; Brightness, Contrast, Saturation, Hue; Overlay capabilities: Time, Date, Text and Privacy image
Audio	
Audio Communication	One-way
Audio Input	Built-in microphone
Audio Compression	G.711 PCM, 8 kHz, 64 kbit/s
Alarm and Event Management	
Events Trigger	Built-in motion detection, schedule
Notification Method	E-mail, FTP, HTTP
Network	
Standards and Protocols	TCP/IP, DHCP, PPPoE, ARP, ICMP, FTP, SMTP, DNS, NTP, UPnP, RTSP, RTP, RTCP, HTTP, TCP, UDP, 3GPP/ISMA RTSP
Interface	
Network Interface	1 RJ-45 for Ethernet 10/100 Base-T
Power Connector	DC power jack
Audio Input	Built-in microphone
Button	Reset push button
Surveillance Management	
Bundled Management Software	Viewing and recording up to 16 cameras
General	
External Power Supply	5VDC, Max 3W
Certification	CE, FCC, RoHS
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Dimensions (H×W×D)	96 x 66 x 28 mm (3.8 x 2.9 x 1.1 in.)

◎ **Diagram:****Package:**

- Network Security Camera TL-SC2020
- Power Adapter
- RJ-45 Ethernet Cable
- Quick Installation Guide
- Resource CD
- Camera Mount Kit