TP-LINK®

150Mbps Wireless N Nano USB Adapter

TL-WN725N

• Features:

- · Wireless N speed up to 150Mbps
- · Seamlessly compatible with 802.11b/g/n products
- 14-language utility and auto run CD
- Supports software-based WPS
- Supports Soft AP function for Wireless Internet Sharing
- Advanced Security: Supports WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
- Supports Windows XP 32/64bit, Vista 32/64bit, Windows 7 32/64bit, Windows 8 32/64bit
- Supports WMM (Wi-Fi Multimedia) Standard for better streaming of real-time data such as video and music
- Supports ad-hoc and infrastructure modes




• Description:

TP-LINK's 150Mbps wireless N Nano USB adapter, TL-WN725N allows users to connect a desktop or notebook computer to a wireless network at 150Mbps. This miniature adapter is designed to be as convenient as possible and once connected to a computer's USB port, can be left there, whether traveling or at home. It also features advanced wireless encryption and easy installation.

Specifications:

| HARDWARE FEATURES | |
|------------------------|--|
| Interface | USB 2.0 |
| LED | Status |
| Dimensions (W X D X H) | 0.73 x 0.59 x 0.28 in. (18.6 x 15 x 7.1mm) |
| Weight | 0.07 ounces / 2.1 grams (Without packaging) |
| Antenna | Internal |
| WIRELESS FEATURES | |
| Wireless Standards | IEEE 802.11b, IEEE 802.11g, IEEE 802.11n |
| Frequency | 2.4-2.4835GHz |
| | 11b: Up to 11Mbps (dynamic) |
| Signal Rate | 11g: Up to 54Mbps (dynamic) |
| | 11n: Up to 150Mbps (dynamic) |
| EIRP | <20dBm |
| Reception Sensitivity | 130M: -68dBm@10% PER 108M: -68dBm@10% PER 54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER |
| Wireless Modes | Ad-Hoc / Infrastructure mode |
| Wireless Security | Supports 64/128 WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES), Supports IEEE 802.1X |
| Modulation Technology | DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM |
| OTHERS | |
| Certifications | CE, FCC, IC, RoHS |
| System Requirements | Windows 8(32/64bits), Windows 7(32/64bits), |
| | Windows Vista(32/64bits), Windows XP(32/64bits) |
| Environment | Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing |

• Diagram:

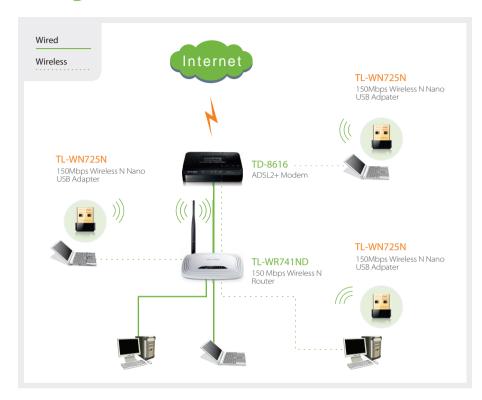

Package:

- 150Mbps Wireless N Nano Adapter TI -WN725N
- Resource CD
- Quick Installation Guide

Related Products:

- 150Mbps Wireless N Router TL-WR741ND/TL-WR740N
- ADSL2+ Modem TD-8616