TP-LINK®
The Reliable Choice

Quick Installation Guide
150Mbps Wireless N PCI Adapter

MODEL NO. **TL-WN751N/TL-WN751ND**
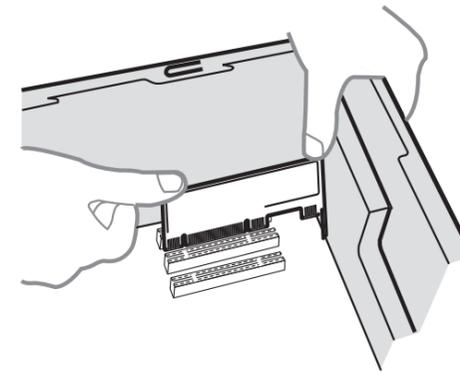
Package Contents

TL-WN751ND

QIG

Resource CD

System Requirement

· Windows 7   · Windows Vista   · Windows XP

Note: The product model shown in this QIG is TL-WN751ND, as an example.

1 Hardware Connection

Steps:

1. Turn off your computer and unplug the power cord from the computer.
2. Open the case. Locate an available PCI slot and remove its slot cover. Keep the screw.
3. Insert the adapter into the PCI slot as shown above.
4. Secure the adapter with the screw removed in Step 2.
5. Close the case and insert the power cable back into the computer.
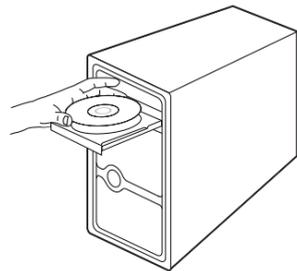6. Turn on your computer.

You may see the **Found New Hardware Wizard** after the adapter has been inserted. Please click '**Cancel**'.

For Windows XP

For Windows Vista

2 Software Installation
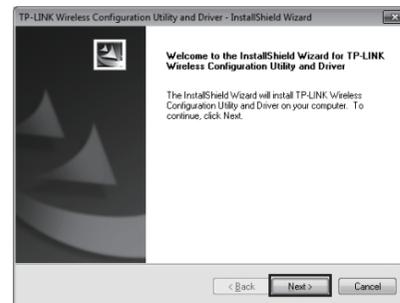(The installtion procedures in Windows 7/ Vista/ XP are similar. Here takes the procedures in Windows 7 for example.)

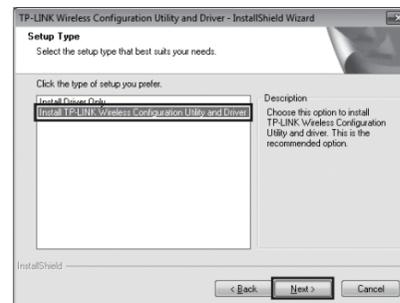**1** Insert the TP-LINK Resource CD into the CD-ROM drive.

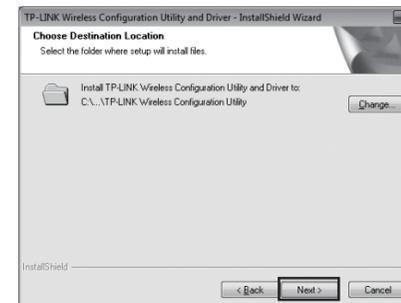**2** Find the appropriate model and choose **Install Driver&Utility**.

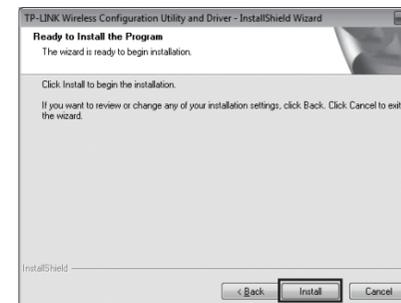**3** The **InstallShield Wizard** window will appear. Click **Next** to continue.

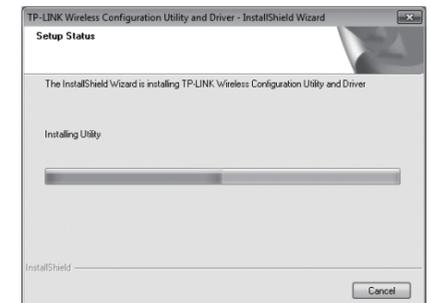**4** Select **Install TP-LINK Wireless Configuration Utility and Driver** and then click **Next** .

5 Click **Change** to specify the destination location or you can leave it default. Click **Next** to continue.
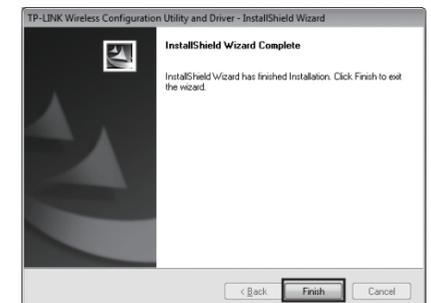
6 Click **Install** to install the driver and utility for your adapter.

7 The drivers and utility will install. This may take 1~2 minutes.
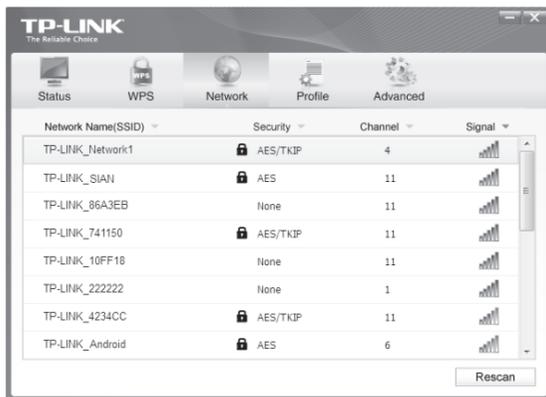
**8** The follwing screen will then appear. Click **Finish** to complete the setup.

1 After installation, the configuration page will pop up on your desktop.

⚠ **Note** The icon 📶 will appear on your desktop. Double-clicking on the icon can start the utility.

2 Click **Network** in the tools section to display a list of available wireless networks. Highlight the target network name (e.g. TP-LINK_Network1) and then click **Connect** to build a connection.
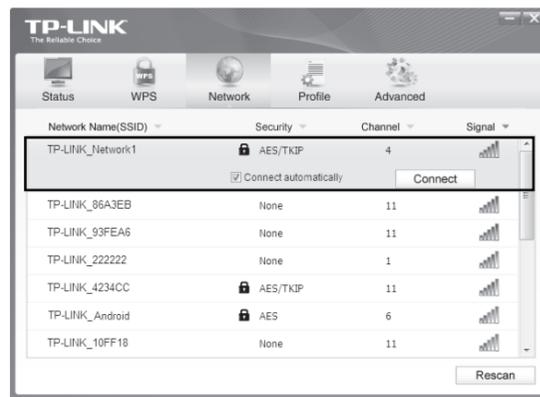
3 If the network is unsecured, you will directly connect to it. If it is security-enabled, there are two ways to connect to it.

Method One:
Input the security key into the field beside **Security Key** and click **OK** to continue.

Method Two:
Without entering a key, push the WPS button on your router if prompted to **You can also connect by pushing the button on the router** as shown below. Then click **OK** to continue.

4 The following screen indicates successful connectivity. Click **Close** to enjoy the Internet.
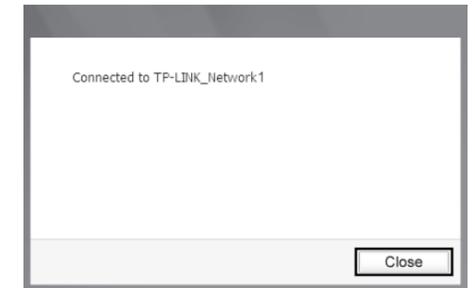
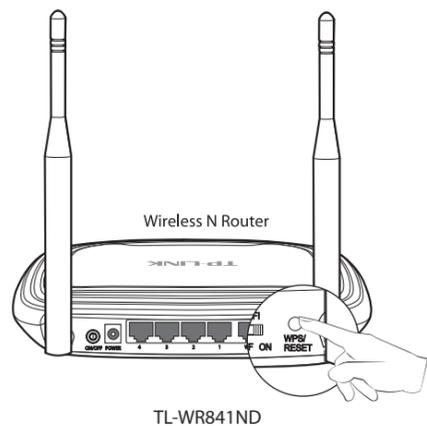**5** To view more information about the network connected, click **Status** in the tools section.
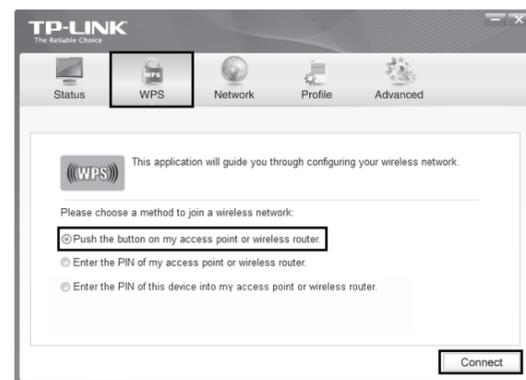

Appendix: Connect to Wireless Router by WPS

If your wireless router features the WPS function, you can also set up a wireless connection in this way.

1 Push the **WPS/RESET** button for 2~3 seconds on the Router. (Here takes Router TL-WR841ND for example.)

Wireless N Router

TL-WR841ND

⚠ **Note** For detailed instructions of WPS, please refer to the User Guide on the resource CD.

2 Launch the config utility and click **WPS** in the tools section. Select **Push the button on my access point or wireless router** and then click **Connect**.

⚠ **Note** The third option "Enter the PIN of this device into my access point or wireless router" is available in OS Windows XP and Windows Vista, but not in Windows 7.

3 Wait for the connection progress to be completed. The following screen indicates successful connectivity. Click **OK** to finish the WPS connection.