

# Enlarge Your Ethernet Network

10/100Mbps WDM Media Converter with 1-Port PoE


## LED Explanation

O PWR	Link/Act	P-Link 7
On: Power on	On: Valid link	106509
Off: Power off	Flashing: Transmitting or receiving data	9686
	Off: Invalid link	REV2.0.0


O PoE

On: Supplying power normally Off: Supplying power abnormally or no power supply

Package Contents: Converter, Power Adapter, Installation Guide

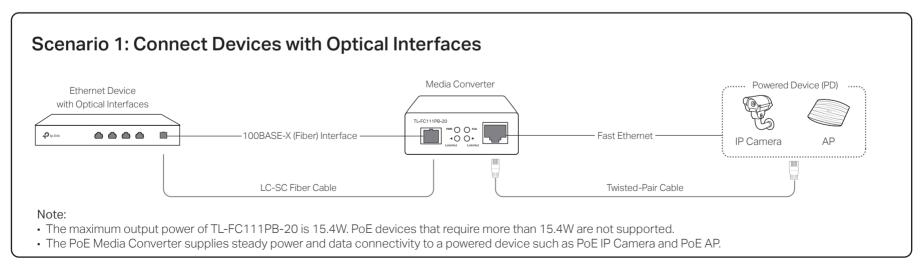

## Scenario 2: Connect Devices without Optical Interfaces

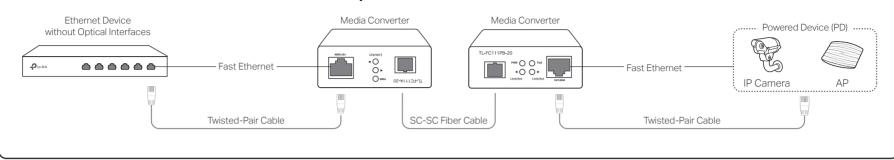

### Specifications

**General Specifications** 

Standards	IEEE 802.3, IEEE 802.3i, IEEE802.3u, IEEE802.3af	
LED	PWR, Link/Act, PoE	
Connector	1 SC fiber optic; 1 RJ45 jack	
Twisted-Pair	10BASE-T: 2-pair UTP/STP of Cat. 3 or above (≤100 m) 100BASE-TX: 2-pair UTP/STP of Cat. 5 or above (≤100 m) 100BASE-BX10: SMF	
Fiber	9/125 µm single-mode fiber	
Transmission Distance	≤20 km	
Wavelength	1310 nm TX, 1550 nm RX	
PoE	802.3af; up to 15.4 W for the PoE port	
Power	48 V/0.375 A	
Dimensions	94.5*73*27 mm	

#### 

#### EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at https://www.tp-link.com/en/ce.

#### UK declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016.

The original UK declaration of conformity may be found at https://www.tp-link.com/support/ukca/

### Environmental and Physical Specifications

Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Operating Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 90% RH non-condensing

- To ask questions, find answers, and communicate with TP-Link users or engineers, please visit https://community.tp-link.com to join TP-Link Community.

For technical support and other information, please visit https://www.tp-link.com/support, or simply scan the QR code.



If you have any suggestions or needs on the product guides, welcome to email techwriter@tp-link.com.cn.

#### Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Do not point or stare directly into the beam or into the optical port of the transceiver when it is operating, as this can injure your eyesight
- Use only power supplies which are provided by manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.