

Quick Start Guide

Smart Wi-Fi Outlet Extender

Images may differ from actual product.
©2023 TP-Link 7106510051 REV1.0.0


1 Download Tapo App

Get the **Tapo app** from the App Store or Google Play.



2 Power Up & Set Up


Plug in your outlet extender. Tap the  button in the app and select your model. Follow the app instructions to complete setup.

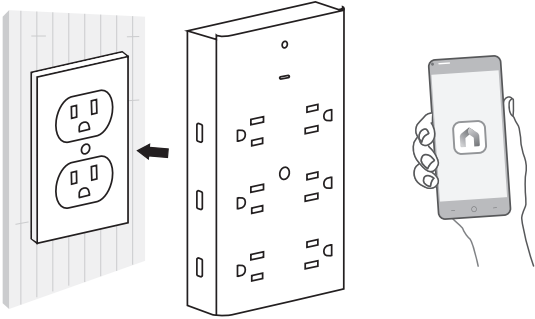

3 Integrate Third-Party Services

To control your smart outlet extender by voice, go to **Me > Third-Party Services** in the Tapo app and integrate Alexa, Google Assistant and other third-party services.

Appearance

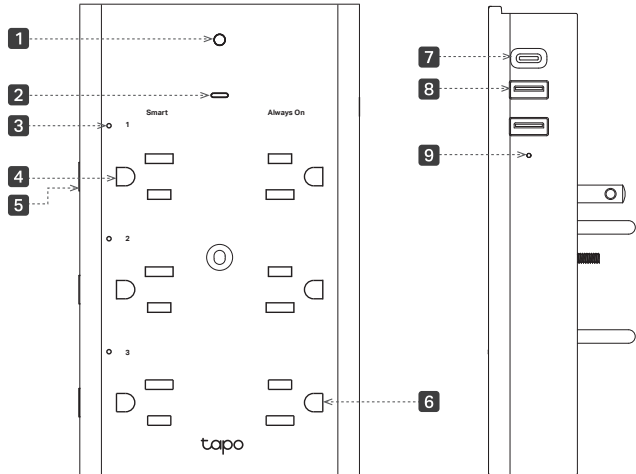

1 Ambient Light Sensor

Senses the amount of ambient light present and works as a trigger for the integrated night light. You can set light conditions on the Tapo app to turn on/off the night light automatically.

2 System LED

3 Smart Outlet LEDs (1-3)

4 Smart Outlets (Left 1-3)

Each outlet can be independently controlled from your smartphone.

5 Smart Outlet Buttons (1-3)

6 Always-on Outlets (Right 1-3)

7 USB Type-C Port

8 USB-A Ports

9 USB LED

System LED Status


LED Status	Event
Solid white	Starting up; Connected to Cloud.
Blinking white and orange slowly	Ready for setup; Resetting Wi-Fi.
Solid orange	Connected to Wi-Fi.
Blinking orange slowly	Disconnected from Wi-Fi.
Blinking white slowly	Firmware updating.
Blinking white and orange quickly	Restoring to factory default settings.

Button Explanations

Buttons (1-3)	Press one of them once to turn on/off the corresponding smart outlet.
	Press and hold one of them for 5s to reset Wi-Fi of the smart extender while keeping other settings.
	Press and hold one of them for 10s to restore the smart extender to factory default settings.


More Stable Installation

You can install the outlet extender into a duplex outlet by using the provided mounting screw and/or the stabilizing post for reinforcement.

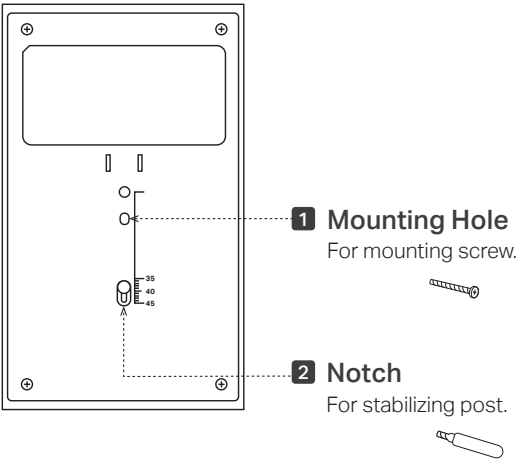

Option 1: Via Mounting Screw


- 1 Plug your Tapo device into a duplex outlet.
- 2 Insert the provided screw into the mounting hole and tighten the screw to secure the outlet extender.

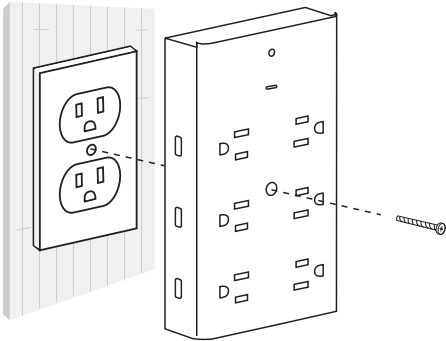

An all-pole mains switch in accordance with IEC 62368-1 Annex L shall be incorporated in the electrical installation of the building. And the contact separation of the switch shall not less than 3.0 mm.


Option 2: Via Stabilizing Post

- 1 Measure the distance between the two outlets of the duplex outlet.



CAUTION: Risk of electric shock. Do not insert your measurement tool into the outlets.

- 2 Insert the stabilizing post into the notch of your outlet extender. Rotate clockwise until it is semi-tightened.
- 3 Slide the post to the measured distance so that the post can plug into the duplex outlet. Rotate clockwise to tighten the post.
- 4 Plug your outlet extender into the duplex outlet.

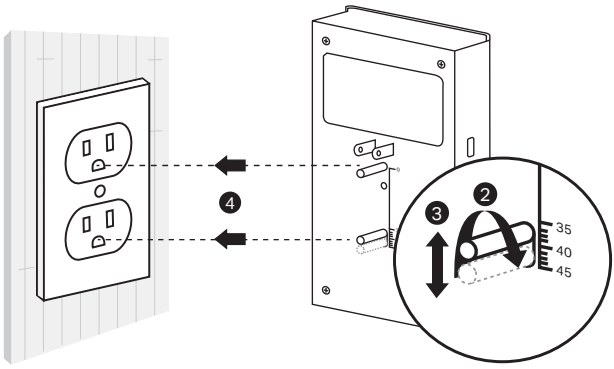

Note: The removable stabilizing post makes the device fit any type of wall socket, such as a duplex outlet, decorator outlet, USB receptacle, or GFCI outlet.

Safety Notice

- Do not ingest the stabilizing post.
- Plug the product into the wall outlets with earthing connection through the plug.
- Do not use the stabilizing post as a common tool.
- Risk of Electric Shock. Do not allow to be used as a toy. Close attention is necessary when used by or near children to reduce the risk of ingestion of the removed stabilizing post.
- If the stabilizing post is not installed into the outlet extender or removed from the outlet extender, do not place it in reach of children.

CAUTION

- Contains Always On Receptacles. To Reduce the Risk of Electric Shock – Disconnect the equipment from this device before servicing.
- To reduce the risk of fire or electric shock, do not use this device with a receptacle in which the slot openings do not align with the blades.
- To reduce the risk of fire or electric shock, use this device to outlets with a pitch of 38.8 mm ~ 43.8 mm.

Specifications

Input: 125V~ 60Hz 15A 1875W MAX

Output:

Receptacle Outlet: 15A MAX

USB Single Port: 5V $\equiv$ 3A / 9V $\equiv$ 2A / 12V $\equiv$ 1.5A

USB Multiple Ports: 5V $\equiv$ 3A (Total)

?

Need some help?

Visit <https://www.tapo.com/support/> for technical support, user guides, FAQs, warranty & more

