



# Regulatory Compliance

Omada 4G+ Cat6 Gigabit Rackmount DSL Gateway

## CE Mark Warning



This is a class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

## OPERATING FREQUENCY (the maximum transmitted power)

WCDMA Band 1/3/8 (25dBm)

LTE Band 1/3/7/8/20/28/38/40(25dBm)

The device complies with RF specifications when the device used at 20 cm from your body.

## EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at

<https://www.tp-link.com/en/ce>

## UKCA Mark



## UK Declaration of Conformity


TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at

<https://www.tp-link.com/support/ukca>

## Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.

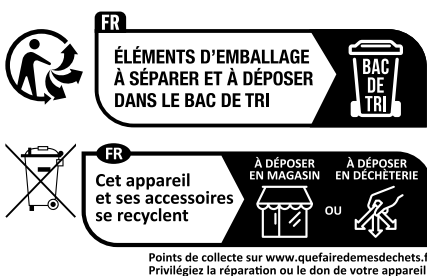

Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



## Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- Place the device with its bottom surface downward.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- Plug the product into the wall outlets with earthing connection through the power supply cord.
- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
  - 運作溫度 : 0° C~40° C (32° F~104° F)
- This product uses radios and other components that emit electromagnetic fields. Electromagnetic fields and magnets may interfere with pacemakers and other implanted medical devices. Always keep the product and its power adapter more than 15 cm (6 inches) away from any pacemakers or other implanted medical devices. If you suspect your product is interfering with your pacemaker or any other implanted medical device, turn off your product and consult your physician for information specific to your medical device.




Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

## Explanations of the symbols on the product label





### 產品標籤上符號的解釋

Note: The product label can be found at the bottom of the product and its I.T.E. power supply. Symbols may vary from products.

注意：產品標籤可以在產品底部和其 I.T.E. 電源供應器上找到。產品標籤可在產品底部找到。符號可能因產品而異。

| Symbol<br>符號  | Explanation<br>說明  |
|---|--|
|  | Class II equipment<br>二級設備                                 |
|  | Class II equipment with functional earthing<br>具有接地功能的二級設備 |
|  | Alternating current<br>交流電                                 |

|   |   |
|---|---|
|    | Direct current<br>DC 電壓                       |
|    | Polarity of d.c. power connector<br>輸出端點的極性   |
|    | For indoor use only<br>僅供室內使用                 |
|    | Dangerous voltage<br>危險電壓                     |
|    | Caution, risk of electric shock<br>請注意，有觸電的危險 |
|    | Energy efficiency Marking<br>能源效率標誌           |
|   | Protective earth<br>保護接地                      |
|  | Earth<br>接地                                   |
|  | Frame or chassis<br>框架或外殼                     |
|  | Functional earthing<br>功能接地                   |
|  | Caution, hot surface<br>請注意，表面過熱              |
|  | Caution<br>警告                                 |
|  | Operator's manual<br>操作手冊                     |
|  | Stand-by<br>待機                                |
|  | "ON"/"OFF" (push-push)<br>“開啟” / ” 關閉” （按壓式）  |
|  | Fuse<br>保險絲                                   |

|   |   |
|---|---|
|    | <p>Fuse is used in neutral N<br/>保險絲用於中性線 N</p>   |
|    | <p>RECYCLING<br/>回收</p> <p>This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.</p> <p>User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.</p> <p>這個產品帶有歐盟指令 2012/19/EU 中關於廢棄電氣電子設備（WEEE）的選擇性分類標誌。這意味著，該產品必須按照該指令處理，以便進行回收或拆解，從而最大限度地減少對環境的影響。</p> <p>用戶可以選擇將產品交給有資格的回收機構，或在購買新的電器或電子設備時將其交給零售商進行回收。</p> |
|   | <p>Caution, avoid listening at high volume levels for long periods<br/>請小心，避免長時間以高音量收聽。</p>   |
|  | <p>Disconnection, all power plugs<br/>斷線，所有電源插頭</p>   |
| <p>m</p>  | <p>Switch of mini-gap construction<br/>迷你間隙結構開關</p>   |
| <p>μ</p>  | <p>Switch of micro-gap construction (for US version)<br/>Switch of micro-gap / micro-disconnection construction (for other versions except US)<br/>小間隙結構開關（US 版本）<br/>小間隙 / 小斷開結構的開關（非 US 版）</p>  |
| <p>ε</p>  | <p>Switch without contact gap (Semiconductor switching device)<br/>無接觸間隙的開關（半導體開關設備）</p>  |