

Supported Load Types

Load Type	Max Current	Max Power (at 120V~)
Steam Iron	15 A	1800 W
Kettle	15 A	1800 W
Heater	15 A	1800 W
Toaster	15 A	1500 W
Coffee Maker	15 A	1200 W
Desk Lamp	1.2 A	80 W
TV	4 A	350 W
PC	7 A	600 W
Fan	1.4 A	120 W
Water Pump	1.4 A	120 W(1/6HP)
Power Adapter/ USB Charger *	2.4 A	200 W

Note:

1. *Power Adapters/USB Chargers rated under 75W do not support PFC (Power Factor Correction). PFC can reduce the inrush current generated when the relay is turned on. Therefore, using a 60-75W Power Adapter/USB Charger may damage the device due to inrush currents.
2. Avoid plugging your appliances with a motor/compressor higher than 1HP, such as an air conditioner. Frequent on/off switching may damage the compressor. You can check the motor/compressor value listed on your appliances or consult their Support.
3. EV charging is not supported as it demands higher power and a charging current that surpasses the plug's rated capacity.

Rating:

100-120V, 50/60Hz, 15A, General use/Resistive

100-120V, 50/60Hz, 1/6HP, Motor load

100-120V, 50/60Hz, 8A, Incandescent

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Quick Start Guide

Mini Smart Wi-Fi Plug

Getting Started

1 Download Tapo

Get the Tapo app from App Store or Google Play, and log in.




2 Set Up

Tap the ⊕ button in the Tapo app. Select **Plugs** and then your model. Follow the app instructions to complete the setup.



How to Reset the Plug

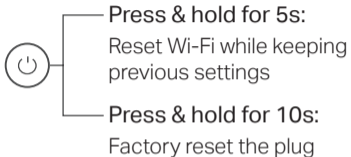

Third-Party Services

Tapo works with Alexa, Google Assistant, Samsung SmartThings, and other third-party services to control your smart plug by voice. You can go to **Me > Third-Party Services** in the Tapo app to set up as you need.

Please keep this instruction manual.

This is a portable direct plug-in device. Plug the device into a suitable outlet. This device is intended for indoor use only. Keep the device away from heat sources and enclosed spaces with poor ventilation.

Purpose of control: this is operating control.

Operating control, Type 1.B action

Impulse voltage: 1500V

Pollution degree 2 NEMA Type 1 Enclosure

Operation temperature: 0~40°C (32~104°F)

Information required in Marking section but not provided on the device due to limited space.



Need some help?

Visit <https://www.tapo.com/support/> for technical support, the user guide, FAQs, warranty & more

