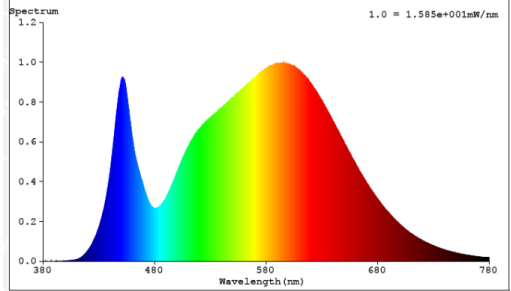


Product Information Sheet			
<b>Supplier's name or trademark:</b>	TP-Link UK Limited		
<b>Supplier's address (a):</b>	Unit 2 & 3 Riverview (142-144), Cardiff Road, Reading, RG1 8EW		
<b>Model identifier:</b>	Tapo L530E 2.0		
Type of light source			
<b>Lighting technology used:</b>	[HL <input type="checkbox"/> /LFL T5 HF <input type="checkbox"/> / LFL T5 HO <input type="checkbox"/> /CFni <input type="checkbox"/> /other FL <input type="checkbox"/> /HPS <input type="checkbox"/> /MH <input type="checkbox"/> /other HID <input type="checkbox"/> /LED <input checked="" type="checkbox"/> /OLED <input type="checkbox"/> /mixed <input type="checkbox"/> /other <input type="checkbox"/>	<b>Non-directional or directional:</b>	[NDLS <input checked="" type="checkbox"/> /DLS <input type="checkbox"/>
<b>Light source cap-type (or other electric interface)</b>	E27		
<b>Mains or non-mains:</b>	[MLS <input checked="" type="checkbox"/> /NMLS <input type="checkbox"/>	<b>Connected light source (CLS):</b>	[yes <input checked="" type="checkbox"/> /no <input type="checkbox"/>
<b>Colour-tuneable light source:</b>	[yes <input checked="" type="checkbox"/> /no <input type="checkbox"/>	<b>Envelope:</b>	[no <input checked="" type="checkbox"/> /second <input type="checkbox"/> /non-clear <input type="checkbox"/>
<b>High luminance light source:</b>	[yes <input type="checkbox"/> /no <input checked="" type="checkbox"/>		
<b>Anti-glare shield:</b>	[yes <input type="checkbox"/> /no <input checked="" type="checkbox"/>	<b>Dimmable:</b>	[Yes <input checked="" type="checkbox"/> /only with specific dimmers <input type="checkbox"/> /no <input type="checkbox"/>
Product parameters			
Parameter	Value	Parameter	Value
General product parameters			
<b>Energy consumption in on-mode (kWh/1,000 h) rounded up to the nearest integer</b>	9 kWh/1000h	<b>Energy efficiency class</b>	[A <input type="checkbox"/> /B <input type="checkbox"/> /C <input type="checkbox"/> /D <input type="checkbox"/> /E <input type="checkbox"/> /F <input checked="" type="checkbox"/> /G <input ]<sup="" type="checkbox"/> (d)

Useful luminous flux, indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		806lm in [sphere <input checked="" type="checkbox"/> /wide cone <input type="checkbox"/> /narrow cone <input type="checkbox"/>	Correlated colour temperature, rounded to the nearest 100K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set	2500K-6500K Range
On-mode power (W)		9.0W	Standby power, expressed in W and rounded to the second decimal point)	0.5W
Networked standby power (P for CLS, expressed in W and rounded to the second decimal point)		0.5W	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	60mm	Spectral power distribution in the range 250 nm to 800 nm, at full-load	
	Width	60mm		
	Depth	115mm		
Claim of equivalent power (see paragraph [2(1) and (2)])		[Yes <input checked="" type="checkbox"/> /- <input type="checkbox"/>	If yes, equivalent power (W)	60W
			Chromaticity coordinates (x and y)	0.459,0.418

<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	X	Beam angle in degrees, or the range of beam angles that can be set	[X/X...X]

<b><u>Parameters for LED and OLED light sources:</u></b>			
<b>R9 Colour rendering index</b>	2	<b>Survival factor</b>	1
<b>The lumen maintenance factor</b>	0.93		
<b><u>Parameters for LED and OLED mains light sources:</u></b>			
<b>Displacement factor (cos <math>\phi_1</math>)</b>	0.9	<b>Colour consistency in McAdam ellipses</b>	5
<b>Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage (see paragraph [2(3)]).</b>	[Yes <input type="checkbox"/> / - <input checked="" type="checkbox"/> ] <sup>(d)</sup>	<b>If yes then replacement claim (W)</b>	N/A
<b>Flicker metric (Pst LM)</b>	0.1	<b>Stroboscopic effect metric (SVM)</b>	0.1