tp-link | tapo

Datasheet

Smart Wi-Fi Wall Outlet Extender

Tapo P306

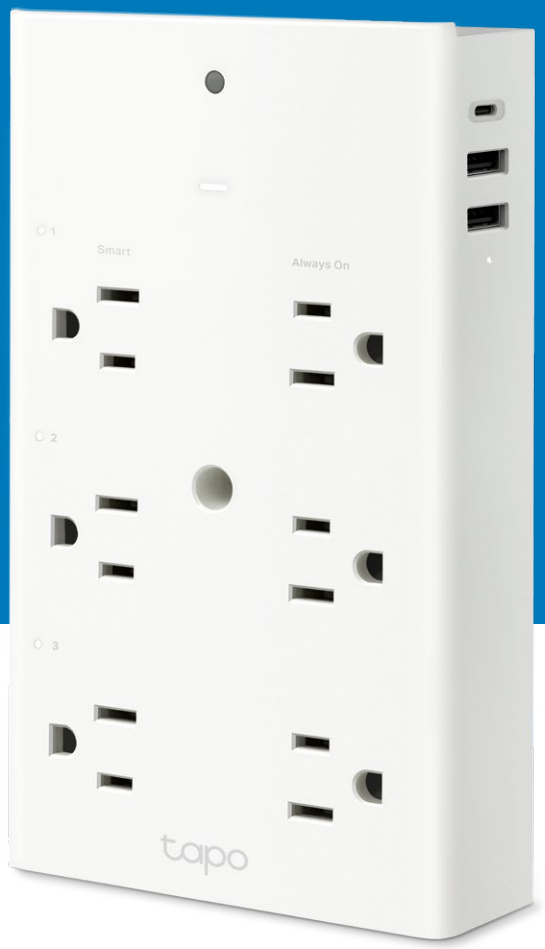

Works with
Apple Home

Highlights

Embrace Apple Home

Control your plugged-in appliances using the Apple Home app and Siri on your iPhone, iPad, Apple Watch, HomePod, or Mac.

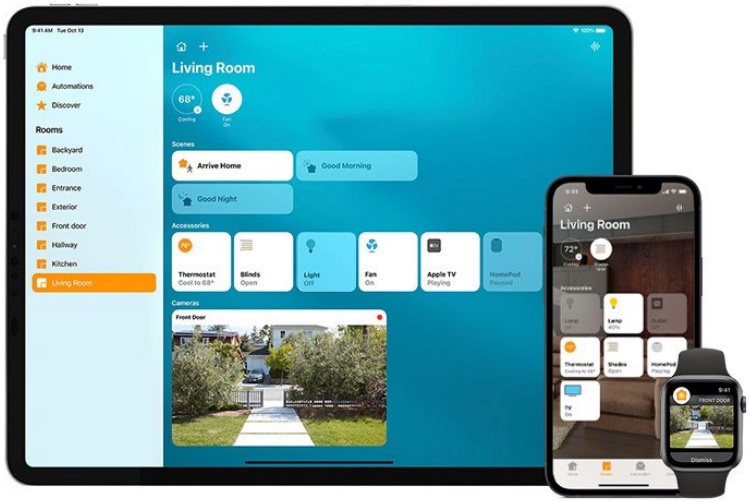

Free Up Your Hands with Voice Control

Free up your hands by using simple voice commands with Alexa, Siri®, or Google Assistant.

Features

9-in-1 Outlet Extender

Features 3× individual smart outlets, 3× always-on outlets, and 3× USB ports. Perfect for any area with limited outlets.

Fast Charging USB Ports

1× USB-C port (PD) and 2× USB-A ports (QC3.0) each deliver up to 18 W of power. Charge your iPhone to 50% in just half an hour.[§]

App & Voice Control

Control 3× AC outlets (individually) and 3× USB ports (together) through the Tapo app, Apple Home app, or compatible voice assistants.

Smart Night Light

The built-in light sensor activates a night light under low ambient lighting. You can also adjust brightness and set schedules via the Tapo app or voice assistant.

Firmly Mounted

Secure the extender to wall outlets using the included widgets without worrying about wobbling when unplugging devices.

Surge Protection and More

Built-in surge protection, overheat protection, and a UL94-V0 flame-retardant shell help keep your home safe.

Wide Space

Effortlessly connect and power multiple devices all at once without interfering each other.

Dual Antennas

Experience a more reliable connection and superior anti-interference capabilities with dual antennas.

Specifications

General

- Voltage: 100-125V~ 50/60 Hz
- Max Load†: 15 A, 1,875 W
- Dimensions: 6.6 × 3.9 × 1.3 in (166.6 × 99.3 × 31.9 mm)
- USB Output:

  9V ⎓ 2A / 12V ⎓ 1.5A / 5V ⎓ 3A (Single Port)

  5V ⎓ 3A (Multiple Ports)

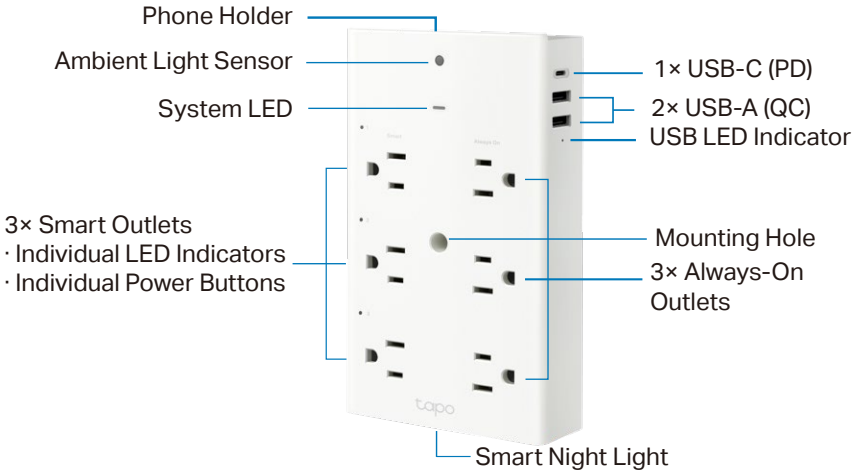

Wireless

- Wireless Standards: IEEE 802.11b, 802.11g, 802.11n
- Protocols: IEEE 802.11b/g/n, 2.4 GHz Wi-Fi
- Bluetooth for setup only
- Wireless Security: No Security; WEP; WPA-PSK; WPA2-PSK; WPA3

Others

- Package Contents:

  Smart Wi-Fi Wall Outlet Extender

  Mounting Screw ×1

  Stabilizing Post ×1

  Quick Start Guide
- Certifications: ETL, RoHS, FCC
- Operating Temperature: 0 ºC–40 ºC
- Operating Humidity: 10%–90%RH, Non-condensing

ᴬVoice control is only supported with certain voice assistants.
†The total power of the connected electrical equipment should not exceed the max load current, and maximum power supported varies based on the appliance.
§The charging data comes from TP-Link labs using an iPhone 13 as the tested device. Actual charging speed may vary depending on smartphone model and working environment.
Please do not use in damp environments or outdoors. For more information, please visit https://www.tapo.com/
Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.
©2023 TP-Link