

# AV600 Powerline Starter Kit

Powerline Network Extender via Existing Electrical Wiring



TL-PA411 KIT





# Highlights


## **HomePlug AV Standard Compliant**

The HomePlug AV standard creates high-speed data transfer rates of up to 600Mbps to support all your online activities.



#### **One-Button Security**


Simply push the Pair button on the adapters, and quickly set up a hassle-free powerline network.

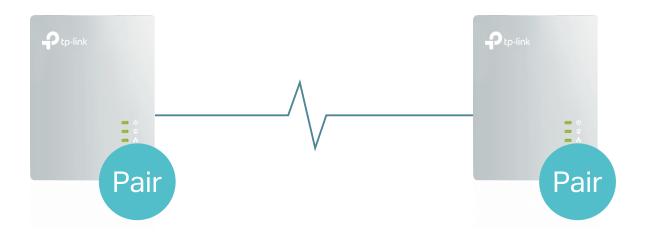

## Highlights


# **Extend Internet to Every Room Using Existing Electrical Wiring**

- No need for new wires or drilling
- Network passes through walls and floors

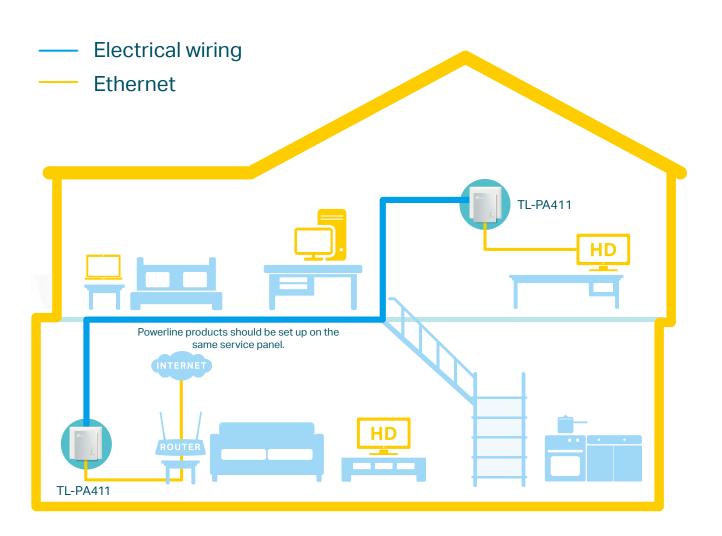

#### **Plug and Play**

Powerline adapters and extenders must be deployed in a set of two or more, and be connected to the same service panel.

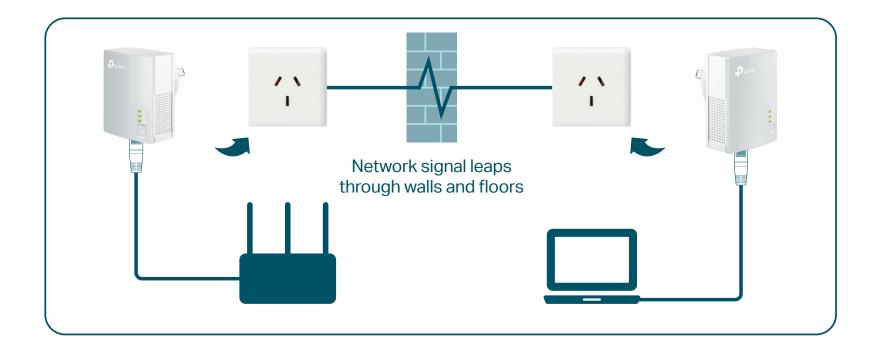

#### Features



- Ultra-fast Powerline Speed HomePlug AV2 standard compliant, high-speed data transfer rate of up to 600Mbps, ideal for Ultra HD streaming and online gaming
- Ethernet Port The Ethernet port allows your TV, game console or PC to connect to the internet at high speed



#### Range

 300 meters Range – Up to 300 meters /
 1000 feet range over the existing household power circuit.



#### Design

Compact Design – Small and elegant, fits your room



#### Ease of Use

- · Plug, pair and play Plug, pair and play, no configuration required
- No new wires No new wires, use existing electrical wiring to expand your home network
- TP-Link tpPLC Allows you to easily manage your network using the tpPLC Utility



### Security

 Pair Button – 128-bit AES encryption easily at a push of the "Pair" button



## **Energy Saving**

 Power Saving – Power Saving Mode helps reducing power consumption by up to 85%


## Specifications

#### Hardware

- · Plug Type: AU
- · Standards and Protocols: HomePlug AV/AV2, IEEE 1901, IEEE 802.3, IEEE 802.3u
- · Power Consumption: Maximum: 3.12W (230V/50Hz)

Typical: 2.34W (230V/50Hz) Standby: 0.71W (230V/50Hz)

- · Range: 300 meters / 1000 feet over service panel
- · Button: Pair Button
- · LED Indicator: Power, Powerline, Ethernet
- Dimensions (W x D x H):  $2.0 \times 1.5 \times 2.6$  in ( $52 \times 37.3 \times 65$  mm)

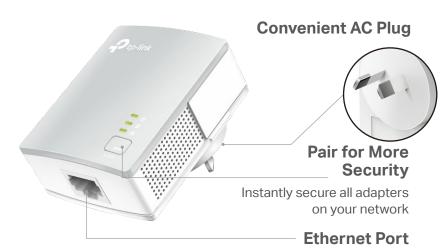

Provide reliable high-speed wired connection for game consoles, smart TVs and STB



©2023 TP-Link

For more information, please visit

https://www.tp-link.com/products/details/?model=TL-PA411+KIT V5

or scan the QR code left

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of the

#### Software

- · Modulation Technology: OFDM (PLC)
- · Encryption: Powerline Security: 128-bit AES

#### **Others**

- · Certification: CE, RoHS
- · Package Contents:

AV600 Powerline Adapter 2 × TL-PA411

2 × Ethernet Cable

Quick Installation Guide

System Requirements:

Windows 2000/XP/2003/Vista, Windows 7/8/8.1/10/11, Mac, Linux

· System Requirements for tpPLC Utility:

Windows 11/10/8.1/8/7 and Mac OS 10.15 or later

· Environment:

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~60°C (-40°F ~140°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders.

†Compatible with all HomePlug AV and AV2 Standard Powerline adapters. This product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or are non-standard or outdated.

†Maximum Powerline signal rates are the physical rates derived from HomePlug AV/AV2 specifications. Actual Powerline data throughput and Powerline range are not guaranteed and will vary as a result of network conditions and environmental factors, including electrical interference, volume of traffic and network overhead, AFCI circuit breaker, and Powerline adapters separated between two or more service panels.

§The Power Saving feature takes effect when your appliances are disconnected or turned off. Actual power saving data will vary in different network conditions and environments.

Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, Internet service provider factors and other environmental conditions.