

Kasa Spot[®]

24/7 Recording










Highlights

Always Spot On


Keep an eye on what's important with Kasa Spot[®]. Stream high-definition live videos from anywhere, anytime. Receive instant alerts that matter by setting multiple activity zones and enabling person, motion, or audio smart detection. Record videos continuously to local storage and play back with your Kasa Smart app.

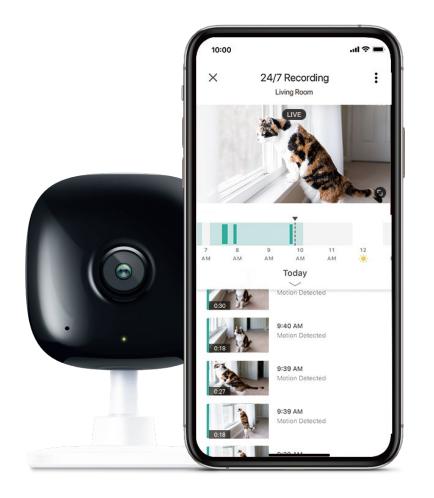

Your Home. One App.

Turn your home into a true smart home with Kasa Smart. Automate your lights and appliances with smart plugs, bulbs, and switches. Secure your home with Kasa cameras. Control it all from the Kasa Smart app.

> Security Cameras

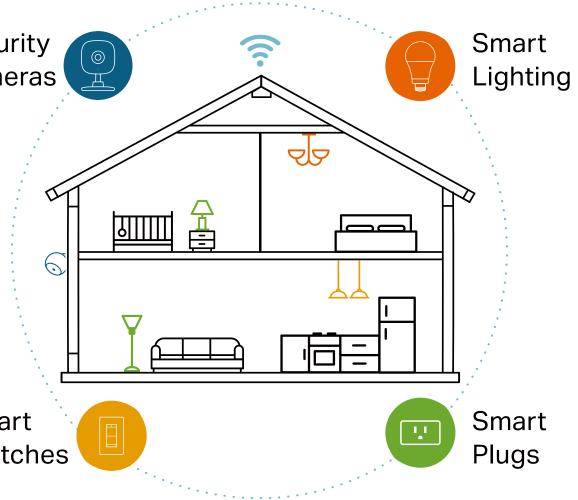


Smart Switches

Note: The app screen depicted is for visual reference only and does not necessarily represent actual product operation or app appearance.

Learn more at tp-link.com/smarthome

Features

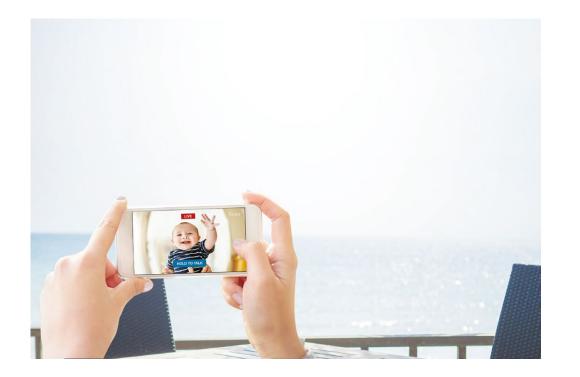

2K HD Video

Sharp and clear 4 MP high resolution offers greater detail and colors, even when you zoom in.



Night Vision

Kasa camera detects activity up to 30 feet away even in total darkness.

Secure Local Storage

Save your footage continuously on a microSD card[†] and play back with you Kasa Smart app.

[†]microSD card not included.

Kasa Care Cloud Storage

Subscribe to a Kasa Care Plan[‡] to store your video clips to the cloud for added backup and more beneficial functions.

[‡]Kasa Care Plans vary in different countries and regions.



Live View with Two-Way Talk

Watch live video and carry on a conversation from anywhere with your phone or other supported device.

Person Detection

Distinguish a person from other objects with cutting-edge Al algorithms.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link

www.tp-link.com

TP-Link Kasa Spot KC400

Specifications

	Image Sensor	1/3" Progressive Scan CMOS Sensor	
	Lens	Focal Length: 2.8 mm Aperture: F2.0 Field of View: 106° (Diagonal), 91° (Horizontal), 49° (Vertica	
	Night Vision	850 nm IR LED (30 ft / 10 m)	
Camera	Day/Night Switch	IR-Cut Filter with Auto-Switching	
	Lighting	/	
	Interface & Button	1× RESET Button 1× microSD Card Slot (Up to 512 GB)	
	Hub Compatibility	1	
	Maximum Resolution	2560 × 1440 px	
Video & Audio	Frame Rate	15 fps	
	Digital Zoom	None	
	Video Compression	H.264	
	Live View	Yes	
Video & Audio	Image Enhancement	3DNR WDR	
	Audio Input & Output	Built-in Microphone and Speaker	
	Audio Communication	Two-Way Audio with Noise Cancellation	
	Siren Volume	Siren not Supported	
Stores	Local Storage	microSD Card Slot on Camera (Up to 512 GB)	
Storage	Cloud Storage	Kasa Care Cloud Storage Services (Subscription required	
	Sensor	/	
Detection & Notification	AI Detection	Motion Detection Person Detection Baby Crying Detection Sound Detection	

ical)	
ed)	

Specifications

Detection & Notification Yes Output Notification Yes Notification Output Notification System Notification System Notification System Notification Network Connectivity Connect via Wi-Fi Wireless Connectivity EEE 802.11b/g/n, 2.4 GHz Wi-Fi Transmission Rate 11b: 11 Mbps 11g: 54 Mbps 11g: 54 Mbps 11r. 72.2 Mbps Protocol TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP Max. Distance Between Hub and Camera/Doorbell / Ethernet Port / RTSP No ON/UF No Security On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3 Power Source 9 V DC Power Adapter Input Voltage 9V, 0.6 A (DC Power) Adapter: Input Voltage 9V, 0.6 A (DC Power) Power Connector Size Adapter: Noide Ø: 5.5 mm Power Cord Length 3 m			
Output Notification System Notification System Notification Network Connectivity Connect via Wi-Fi Wireless Connectivity IEEE 802.11b/g/n, 2.4 GHz Wi-Fi 11b: 11 Mbps 11b: 11 Mbps 11g: 54 Mbps 11g: 54 Mbps 11n: 72.2 Mbps Protocol Protocol TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP Max. Distance Between Hub and Camera/Doorbell / Ethernet Port / RTSP No ONVIF No Security Security Power Source 9 V DC Power Adapter Input Voltage 9 V, 0.6 A (DC Power) Adapter: Inside Ø: 2.1 mm Outside Ø: 2.5 mm Power Cord Length 3 m	Detection & Notification	Activity Zones	
Wireless Connectivity IEEE 802.11b/g/n, 2.4 GHz Wi-Fi Transmission Rate 11b: 11 Mbps 11g: 54 Mbps 11g: 54 Mbps 11n: 72.2 Mbps Protocol TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP Max. Distance Between Hub and Camera/Doorbell / Ethernet Port / RTSP No ONVIF No Security Security Power Source 9 V DC Power Adapter Input Voltage 9 V 0.6 A (DC Power) Output Voltage 9 V 0.6 A (DC Power) Power Cord Length 3 m		Output Notification	
NetworkTransmission Rate11b: 11 Mbps 11g: 54 Mbps 11n: 72.2 MbpsProtocolTCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDPMax. Distance Between Hub and Camera/Doorbell/Ethernet Port/RTSPNoOn-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3Power Source9 V DC Power AdapterInput Voltage100-240 V, 50/60 HzOutput Voltage9 V, 0.6 A (DC Power)Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmAdapter: Inside Ø: 5.5 mmPower Cord Length3 m		Network Connectivity	Connect via Wi-Fi
NetworkTransmission Rate11g: 54 Mbps 11n: 72.2 MbpsProtocolTCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDPMax. Distance Between Hub and Camera/Doorbell/Ethernet Port/RTSPNoOnvIFNoSecuritySecurityPower Source9 V DC Power AdapterInput Voltage9 V, 0.6 A (DC Power)Output Voltage9 V, 0.6 A (DC Power)Power Cornector SizeAdapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmPower Cord Length3 m		Wireless Connectivity	IEEE 802.11b/g/n, 2.4 GHz Wi-Fi
Max. Distance Between Hub and Camera/Doorbell / Ethernet Port / RTSP No ONVIF No Security Security Power Source 9 V DC Power Adapter Input Voltage 100-240 V, 50/60 Hz Output Voltage 9 V, 0.6 A (DC Power) Power Connector Size Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mm Power Cord Length 3 m		Transmission Rate	11g: 54 Mbps
and Camera/Doorbell / Ethernet Port / RTSP No ONVIF No Security On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3 Power Source 9 V DC Power Adapter Input Voltage 100-240 V, 50/60 Hz Output Voltage 9 V, 0.6 A (DC Power) Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mm Power Cord Length 3 m	Network	Protocol	TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP
RTSPNoONVIFNoSecuritySecurityOn-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3Power Source9 V DC Power AdapterInput Voltage100-240 V, 50/60 HzOutput Voltage9 V, 0.6 A (DC Power)DC Power Connector SizeAdapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmPower Cord Length3 m			/
ONVIFNoSecurityOn-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3Power Source9 V DC Power AdapterInput Voltage100-240 V, 50/60 HzOutput Voltage9 V, 0.6 A (DC Power)DC Power Connector SizeAdapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmPower Cord Length3 m		Ethernet Port	/
SecurityOn-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3Power Source9 V DC Power AdapterInput Voltage100-240 V, 50/60 HzOutput Voltage9 V, 0.6 A (DC Power)DC Power Connector SizeAdapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmPower Cord Length3 m		RTSP	No
Security128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3Power Source9 V DC Power AdapterInput Voltage100-240 V, 50/60 HzOutput Voltage9 V, 0.6 A (DC Power)DC Power Connector SizeAdapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mmPower Cord Length3 m		ONVIF	No
Power Input Voltage 100-240 V, 50/60 Hz Output Voltage 9 V, 0.6 A (DC Power) Adapter: Inside Ø: 2.1 mm DC Power Connector Size Inside Ø: 5.5 mm Power Cord Length 3 m	Security	Security	128-bit AES Encryption with SSL/TLS
Power Output Voltage 9 V, 0.6 A (DC Power) DC Power Connector Size Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mm Power Cord Length 3 m		Power Source	9 V DC Power Adapter
Power DC Power Connector Size Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mm Power Cord Length 3 m	Power	Input Voltage	100-240 V, 50/60 Hz
Power DC Power Connector Size Inside Ø: 2.1 mm Outside Ø: 5.5 mm Outside Ø: 5.5 mm		Output Voltage	9 V, 0.6 A (DC Power)
		DC Power Connector Size	Inside Ø: 2.1 mm
Typical Power Consumption		Power Cord Length	3 m
		Typical Power Consumption	
Maximum Power Consumption		Maximum Power Consumption	

s)	

Specifications

	Certifications	FCC, CE, RCM, WWA
	Smart Integration	Google Assistant, Amazon Alexa
	Weather Resistance	/
	System Requirements	Kasa App: iOS 11.0 or higher, Andriod 5.0 or higher
	Mounting Options	Tabletop Ceiling-Mounted
	Operating Temperature	0 °C ~ 40 °C (32 °F ~ 104 °F)
	Storage Temperature	-40 °C ~ 70 °C (-40 °F ~ 158 °F)
General	Operating Humidity	10% ~ 95% RH, Non-condensing
	Storage Humidity	5% ~ 90% RH, Non-condensing
	Charging Temperature	/
	Mounting Screw Size	
	Dimensions	2.32*1.95*3.5 in (59*49.6*88.8 mm)
	Weight	2.1 oz / 60 g
	Package Contents	Kasa Spot Camera Power Adapter Quick Start Guide Mounting Screws Mounting Template 10ft USB Cable

-		