



# Kasa Spot® Pan Tilt 24/7 Recording

Indoor Security Camera



KC410S



2K HD  
Video



Starlight  
Night Vision



Motion  
Tracking



Secure Local  
Storage

# Highlights


## Up, Down, All-Around

Get the full picture of any space in your apartment, dorm or home with Kasa Spot® Pan Tilt. With a 360° horizontal view and 113° vertical view, the Pan Tilt has everything covered. With Motion Tracking and Patrol Mode, track activity from beginning to end and set multiple distinct viewpoints for your camera to monitor at set intervals.



## Your Home. One App.

Turn your home into a true smart home with Kasa Smart. Automate your lights and appliances with smart plugs, bulbs, and switches. Secure your home with Kasa cameras. Control it all from the Kasa Smart app.

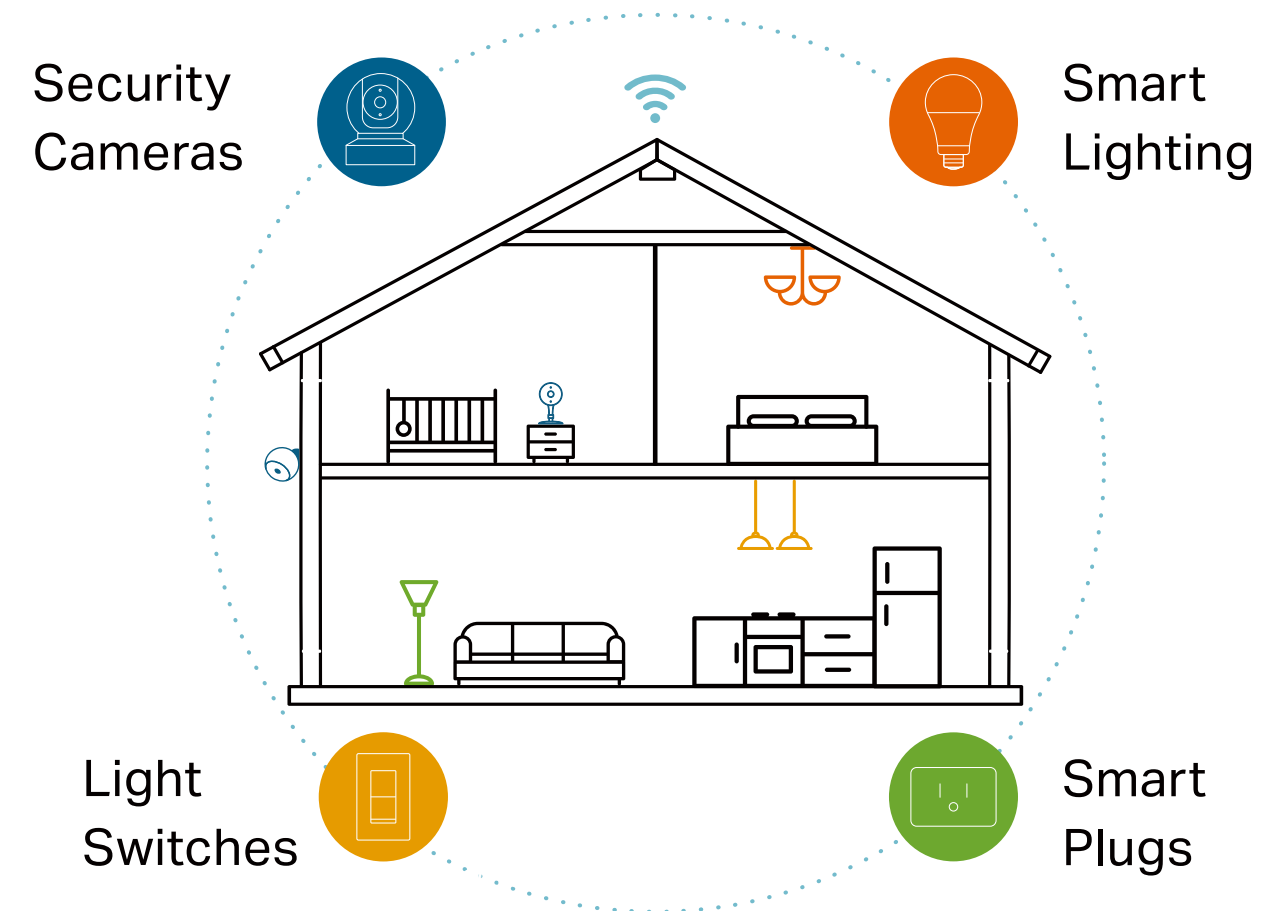

# Features



## 2K HD Video

Sharp and clear 4 MP high resolution offers greater detail and colors, even when you zoom in.

## Pan Tilt in Real Time

Swipe up, down, left, and right on your phone to rotate and set your camera's point of view.

## Motion Tracking

Track and follow the subject when motion activity is detected to keep it within the camera's field of view.



## Live View with Two-Way Talk

Watch live video and carry on a conversation from anywhere with your phone or other supported device.

## Patrol Mode

Set multiple distinct viewpoints and program your camera to keep an eye on each region at selected intervals.

## Activity Zones

Control what alerts you receive by creating up to 16 custom activity zones, at no charge, around areas that are important to you.



## Starlight Night Vision

Capture colorful videos even in low-light environments with a highly sensitive starlight sensor.

## Secure Local and Cloud Storage

Save your footage continuously on a microSD card<sup>†</sup> or subscribe to a Kasa Care Plan<sup>‡</sup> to store video clips to the cloud.

<sup>†</sup>microSD card not included.

<sup>‡</sup>Kasa Care Plans vary by country and region.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.

© 2024 TP-Link

[www.tp-link.com](http://www.tp-link.com)


# Specifications

<b>Camera</b>	Image Sensor	1/3" Progressive Scan CMOS Sensor
	Lens	Focal Length: 4.3 mm Aperture: F1.6 Field of View: 98.4° (Diagonal), 85.4° (Horizontal), 46.4° (Vertical)
	Night Vision	850 nm IR LED (30 ft / 10 m)
	Day/Night Switch	IR-Cut Filter with Auto-Switching
	Lighting	/
	Interface & Button	1× RESET Button 1× microSD Card Slot (Up to 512 GB)
	Hub Compatibility	/
<b>Video &amp; Audio</b>	Maximum Resolution	2560 × 1440 px
	Frame Rate	15 fps
	Digital Zoom	None
	Video Compression	H.264
	Live View	Yes
<b>Video &amp; Audio</b>	Image Enhancement	3DNR WDR
	Audio Input & Output	Built-in Microphone and Speaker
	Audio Communication	Two-Way Audio with Noise Cancellation
	Siren Volume	Siren not Supported
<b>Storage</b>	Local Storage	microSD Card Slot on Camera (Up to 512 GB)
	Cloud Storage	Kasa Care Cloud Storage Services (Subscription required)
<b>Detection &amp; Notification</b>	Sensor	/
	AI Detection	Motion Detection Person Detection Baby Crying Detection Sound Detection

# Specifications

<b>Detection &amp; Notification</b>	Activity Zones	Yes *Only works with Motion Detection.
	Output Notification	System Notification System Notification with Snapshot (Kasa Care Services)
<b>Network</b>	Network Connectivity	Connect via Wi-Fi
	Wireless Connectivity	IEEE 802.11b/g/n, 2.4 GHz Wi-Fi
	Transmission Rate	11b: 11 Mbps 11g: 54 Mbps 11n: 72.2 Mbps
	Protocol	TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP
	Max. Distance Between Hub and Camera/Doorbell	/
	Ethernet Port	/
	RTSP	No
	ONVIF	No
<b>Security</b>	Security	On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3
<b>Power</b>	Power Source	9 V DC Power Adapter
	Input Voltage	100-240 V, 50/60 Hz
	Output Voltage	9 V, 0.6 A (DC Power)
	DC Power Connector Size	Adapter: Inside Ø: 2.1 mm Outside Ø: 5.5 mm
	Power Cord Length	3 m
	Typical Power Consumption	
	Maximum Power Consumption	

# Specifications
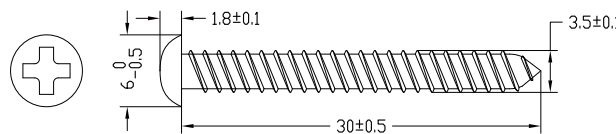
<b>General</b>	Certifications	FCC, RCM, CE, WWA, WEEE
	Smart Integration	Google Assistant, Amazon Alexa
	Weather Resistance	/
	System Requirements	Kasa App: iOS 11.0 or higher, Android 5.0 or higher
	Mounting Options	Tabletop Ceiling-Mounted
	Operating Temperature	0 °C ~ 40 °C (32°F ~ 104 °F)
	Storage Temperature	-40 °C ~ 70 °C (-40 °F ~ 158 °F)
	Operating Humidity	10% ~ 95% RH, Non-condensing
	Storage Humidity	5% ~ 90% RH, Non-condensing
	Charging Temperature	\
	Mounting Screw Size	
	Dimensions	3.23 × 3.23 × 4.43 in (82.05 × 82 × 112.6 mm)
	Weight	7.1 oz / 200 g
	Package Contents	Kasa Spot Pan Tilt Power Adapter Quick Start Guide Mounting Screws Mounting Template 10ft USB Cable