

# AI Home Security Wi-Fi Camera

2K  
QHD

Wi-Fi 6

Tapo C125

2 Pack



## Physical Privacy Shutter

Free Smart AI  
Detection

140° Ultra-Wide  
View


Discreet Night Vision  
with 940nm IR LED



## // Highlights

### Smart AI Detection and Notification

Smart AI identifies people, pets, and vehicles while also recognizing abnormal sounds, notifying users as needed.

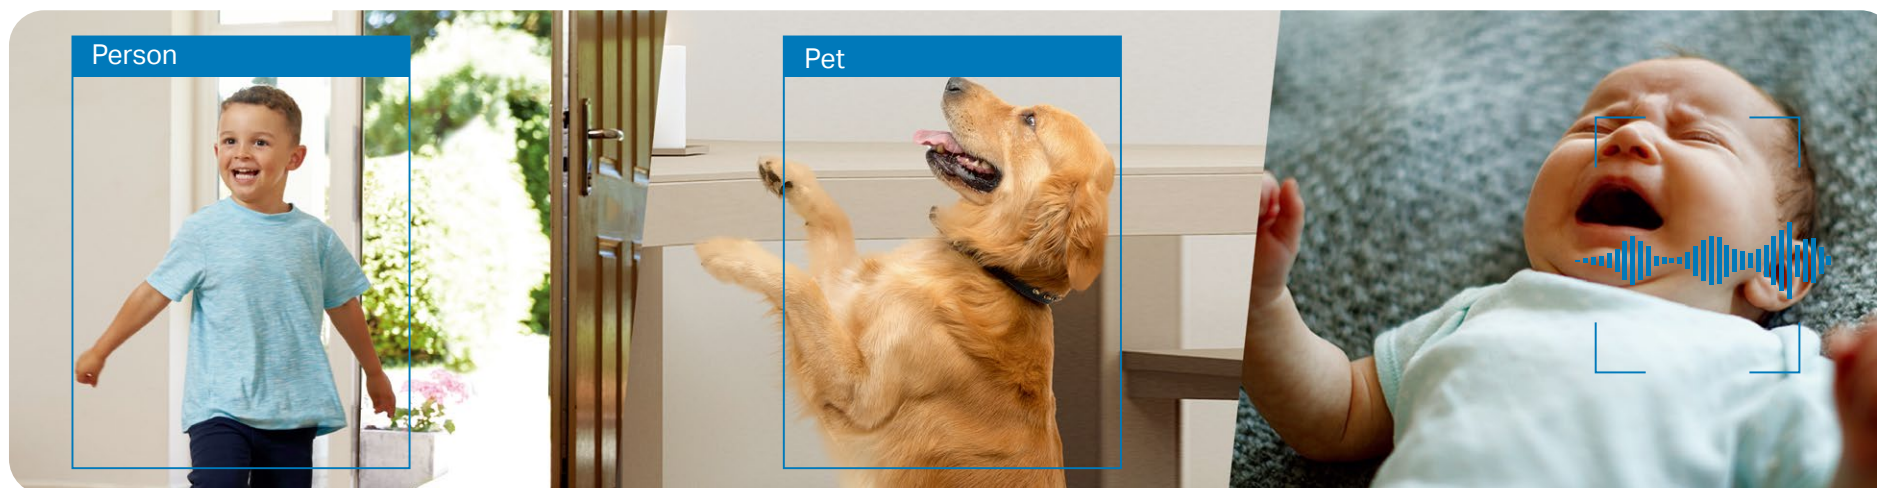

## // Features



### 2K QHD<sup>Δ</sup> + AI Image Enhancement + HDR

Utilizing AI image enhancement technology, experience superior clarity even in low light or overexposed settings.



### Physical Privacy Shutter

When enabled, maintain your privacy with the lens blocked by the privacy shutter.



### Two-Way Audio

Enables communication through a built-in microphone and speaker.



### Ultra-Wide 140° Field of View

Capture more views with an ultra-wide field of view.



### Activity Zones

Notifies you when activity is detected in specific zones.



### Customizable Alarm & Siren

Trigger the recorded audio as an alarm when motion is detected.



### Discreet Night Vision with 940nm IR LED

Enjoy unobtrusive night-time monitoring of your baby or pet with the barely-noticeable, low-intensity 940nm IR LED.



### Local<sup>†</sup> and Cloud<sup>‡</sup> Storage Supported

Save recorded videos on the microSD card<sup>†</sup> (up to 512 GB) or by using Tapo Care cloud storage services.



### Magnetic Mounting

Effortlessly set up your Tapo C125 using its versatile magnetic base.

<sup>†</sup>microSD card needs to be purchased separately. Actual storage capacity depends on the size of the microSD card used.

<sup>‡</sup>Subscribe for cloud storage at <https://www.tapo.com/tapocare/>

<sup>Δ</sup>Compatible with Alexa and Google Assistant supported displays. User experience is dependent on the connected device's specifications.

<sup>§</sup>Tapo C125 does not have an Ethernet port and can only be connected via Wi-Fi.

For more information, please visit <https://www.tapo.com/>

All brands and product names are trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice.


©2024 TP-Link

## // Specifications

<b>Camera</b>	Image Sensor	1/2.9" Progressive Scan CMOS Starlight Sensor
	Lens	Focal Length: 2.45 mm Aperture: 2.0 Field of View: 140° (Diagonal), 120° (Horizontal), 67° (Vertical)
	Night Vision	1 × 850 nm IR LED (30 ft / 10 m) 2 × 940 nm IR LED (30 ft / 10 m)
	Day/Night Switch	IR-Cut Filter with Auto-Switching
	Lighting	/
	Interface & Button	1× RESET Button 1× microSD Card Slot (Up to 512 GB)
	Hub Compatibility	/
<b>Video &amp; Audio</b>	Maximum Resolution	2K QHD 4MP (2560 × 1440 px)
	Frame Rate	15/20/25/30 fps (Default 15 fps)
	Digital Zoom	12x
	Video Compression	H.264
	Live View	Yes

<b>Video &amp; Audio</b>	Image Enhancement	3DNR WDR HDR
	Audio Input & Output	Built-in Microphone and Speaker
	Audio Communication	Two-Way Audio with Noise Cancellation
	Siren Volume	94 dB (Level measured at 4-inch/10-cm distance)
<b>Storage</b>	Local Storage	microSD Card Slot on Camera (Up to 512 GB)
	Cloud Storage	Tapo Care Cloud Storage Services (Subscription required)
<b>Detection &amp; Notification</b>	Sensor	/
	AI Detection	Motion Detection Person Detection Pet Detection Vehicle Detection Line-Crossing Detection Camera Tampering Baby Crying Detection Cat Meows Detection Dog Barks Detection Glass Break Detection
	Activity Zones	Yes *Only works with Motion Detection.
	Output Notification	System Notification System Notification with Snapshot (Tapo Care Services)

<b>Network</b>	Network Connectivity	Connect via Wi-Fi
	Wireless Connectivity	IEEE 802.11b/g/n/ax, 2.4 GHz Wi-Fi. Bluetooth
	Transmission Rate	11b: 11 Mbps 11g: 54 Mbps 11n: 72.2 Mbps 11ax: 114.7 Mbps
	Protocol	TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP
	Max. Distance Between Hub and Camera/Doorbell	/
	Ethernet Port	/
	RTSP	Yes
	ONVIF	Yes
<b>Security</b>	Security	On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK/WPA3
<b>Power</b>	Power Source	9V DC Power Adapter
	Input Voltage	100-240 V, 50/60 Hz
	Output Voltage	9.0 V, 0.6 A (DC Power)
	DC Power Connector Size	Inside Ø: 2.1 mm Outside Ø: 5.5 mm
	Power Cord Length	3 m
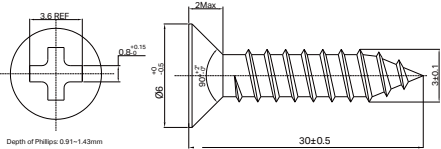
<b>Power</b>	Typical Power Consumption	3.6 W
	Maximum Power Consumption	5.4 W
<b>General</b>	Certifications	CE, NTRA, RCM, KC, FCC, NCC, BSMI, HomeKit
	Smart Integration	Google Assistant, Amazon Alexa, Apple HomeKit
	Weather Resistance	/
	System Requirements	Tapo App: iOS 11.0 or higher, Andriod 5.0 or higher
	Mounting Options	Tabletop Ceiling-Mounted
	Operating Temperature	0 °C ~ 40 °C (32 °F ~ 104 °F)
	Storage Temperature	-20 °C ~ 60 °C (-4 °F ~ 140 °F)
	Operating Humidity	10%~90% RH, Non-condensing
	Storage Humidity	5%~90% RH, Non-condensing
	Charging Temperature	\
	Mounting Screw Size	
	Dimensions	3.01 × 2.61 × 1.76 in (76.4 × 66.4 × 44.6 mm)
Weight	3.7 oz / 104 g	

<b>General</b>	Package Contents	Tapo C125 Camera Power Adapter Quick Start Guide Mounting Anchors Mounting Screws Mounting Template Metal Plate 3M Adhesive
----------------	------------------	--