

BE11000

Whole Home

Mesh Wi-Fi 7 AP

MODEL: HB610



Overview

Leveraging the cutting-edge Wi-Fi 7 technology and our expertise in Wi-Fi technology, HB610 offers ultra-fast Wi-Fi speeds up to 11 Gbps. Enjoy improved Wi-Fi experiences across all three bands with higher speeds and lower latency thanks to a groundbreaking mix of 4K-QAM, multi-link operation, multi-RU, and 6 simultaneous spatial streams. With 2.5 GbE WAN/LAN port and three 2.5 GbE LAN ports, you can enjoy multi-gig internet access and a robust smart mesh network for fully connected home.



11 Gbps Tri-Band Wi-Fi

Deliver total Wi-Fi speeds up to 11 Gbps across 6 GHz, 5 GHz, and 2.4 GHz bands with lower latency and better online experiences.



Full 2.5G Multi-Gig Connectivity

Boost whole internet throughput up to 2.5 Gbps for smoother and faster online activities. Four 2.5GbE Ethernet ports offers ultra-fast and flexible internet access.



Increased Capacity

Connect over 200 devices simultaneously with a more efficient network that loads faster with high performance.



Multi-link Operation (MLO)

Achieve higher throughput for each device with lower latency and higher reliability via multi-link aggregation across three bands.

Features



Easy to Set Up and Use

Set up your device and network in minutes, whether you prefer the powerful Aginet app or the intuitive web interface.



EasyMesh Compatible

HB610 adopts standard EasyMesh technology. All compatible units can work together to form a mesh network to cover every corner of a home.



Easy Remote Management

TR-069/TR-369 protocols and TAUC (TP-Link Aginet Unified Cloud) are supported, service providers can manage multiple devices remotely.



Whole Home Coverage


All units work together to form a unified mesh network that covers every corner of your home based on standard EasyMesh technology.



Enhanced Security

WPA3 encryption, Multi-SSID, and parental controls provide personalized and safer online experience.

Hardware Description

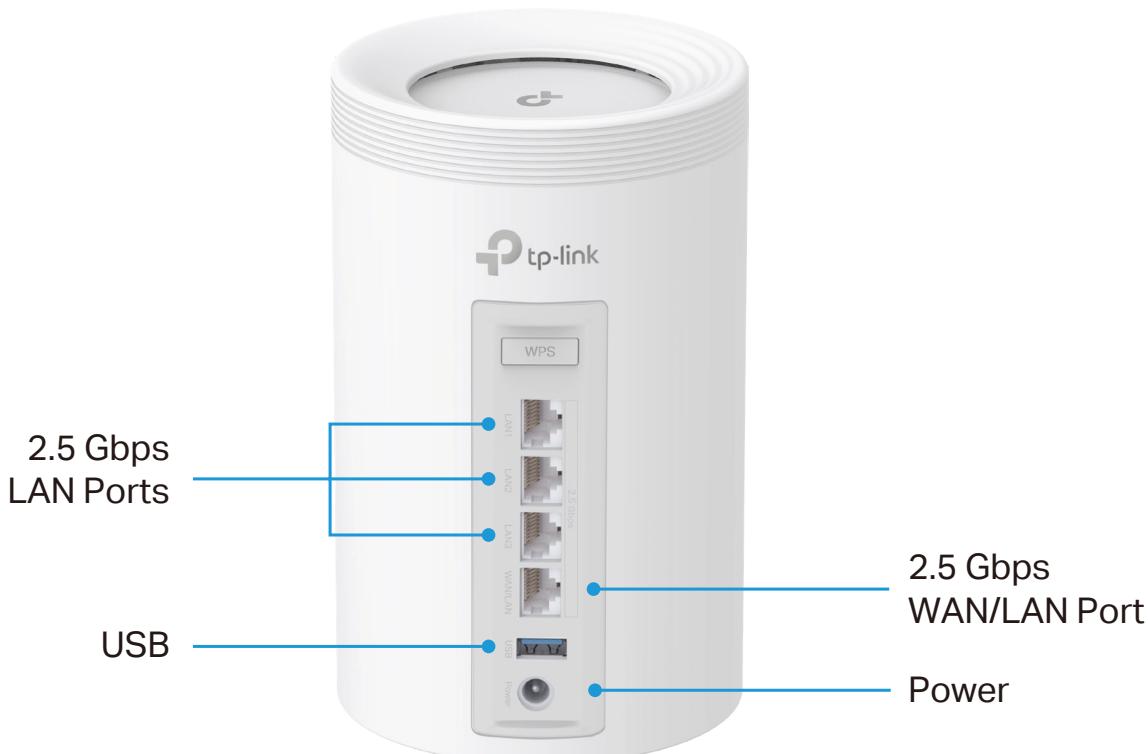

Specifications

Hardware

- **Ethernet Port**
1× 10/100/1000/2500 Mbps RJ45 WAN/LAN Port,
3× 10/100/1000/2500 Mbps RJ45 LAN Ports,
1× USB 3.0 Port
- **Button**
1× RESET button at the bottom,
1× WPS button on the back
- **Dimensions (W × D × H)**
4.23 × 4.23 × 6.93 in (107.5 × 107.5 × 176 mm)
- **Power Adapter Input**
100-240V~50/60Hz
- **Power Adapter Output**
12VDC/2.5A
- **Max Power Consumption**
US/CA: 27.6W
- **CPU**
Quad-core @ 1.5 GHz CPU
- **Antenna**
Internal Wi-Fi antennas
- **Cooling Method**
Passive

Wireless

- **Wireless Standards**
IEEE 802.11be/ax 6 GHz
IEEE 802.11be/ax/ac/n/a 5 GHz
IEEE 802.11be/ax/n/g/b 2.4 GHz
- **Mesh protocol**
802.11k/v/r
- **Frequency**
6 GHz, 5 GHz, 2.4 GHz
- **Signal Rate**
6 GHz: 5760 Mbps (802.11be, 2×2 MIMO)
5 GHz: 4320 Mbps (802.11be, 2×2 MIMO)
2.4 GHz: 688 Mbps (802.11be, 2×2 MIMO)
- **Transmit Power**
FCC&IC: <30 dBm(6 GHz), <30 dBm(5 GHz), <30 dBm(2.4 GHz)
CE: <23 dBm(6 GHz), <30 dBm(5 GHz), <20 dBm(2.4 GHz)
IMDA: <24 dBm(6 GHz), <30 dBm(5 GHz), <23 dBm(2.4 GHz)
- **Wireless Security**
WPA/WPA2/WPA3 Personal

Software

- **Working Mode**
Router Mode, Access Point Mode
- **WAN Type**
Dynamic IP/Static IP/PPPoE/L2TP/PPTP(Multi-EWAN)
- **DHCP**
Server, DHCP Client List, Address Reservation
- **Protocols**
Supports IPv4 and IPv6
- **Guest Network**
1× 6 GHz Guest Network
1× 5 GHz Guest Network
1× 2.4 GHz Guest Network
- **Features**
Multi-Link Operation (MLO), 320 MHz Bandwidth, 4K-QAM, Multi-RU, MU-MIMO, OFDMA, BSS Color, Beamforming, Band Steering, Airtime Fairness, WiFi Schedule, Wireless Statistics, Guest Network, Parental Control, QoS(Quality of Service), Port Forwarding, Cloud Firmware Upgrade, Firewall, Network Diagnostic, CWMP, Traffic Statistic
- **Management**
Local management: WebGUI management, Aginet app management
Remote management: TR-069, TR-181, TR-369, TR-111, TR-143
Cloud management: TP-Link Aginet Unified Cloud (TAUC)
- **Multi SSID**
Up to 3 SSIDs for each band (including main SSID)
- **Dynamic DNS**
NO-IP, DynDNS, TP-Link
- **VPN Server**
PPTP, OpenVPN, IPSec
- **VPN Pass-Through**
IPSec, PPTP, L2TP
- **Access Control**
Parental Control, Local Management, Host List, White/Black List
- **Firewall Security**
DoS, SPI Firewall, IP and MAC Address Binding

Others

- **Certification**
FCC, CE, IC
- **Environment**
Operating Temperature: 0°C~40°C (32°F~104°F)
Storage Temperature: -40°C~60°C (-40°F~140°F)
Operating Humidity: 10%~90%RH
Storage Humidity: 5%~90%RH
- **Package Contents for HB610**
1× Whole Home Mesh Wi-Fi 7 AP HB610
1× RJ45 Ethernet cable
1× Power adapter
1× Quick Installation Guide