



Wi-Fi 7



BE3600 Dual-Band Wi-Fi 7 Range Extender

Wi-Fi Dead Zone Killer



RE225BE

Expand with Faster,
Smarter Wi-Fi 7


3.6 Gbps Dual-Band
Wi-Fi Speeds[†]

Powerful Boosted
Coverage

Quick, Simple Setup
with Tether App

Highlights

Wi-Fi 7 — Wi-Fi Like Never Before

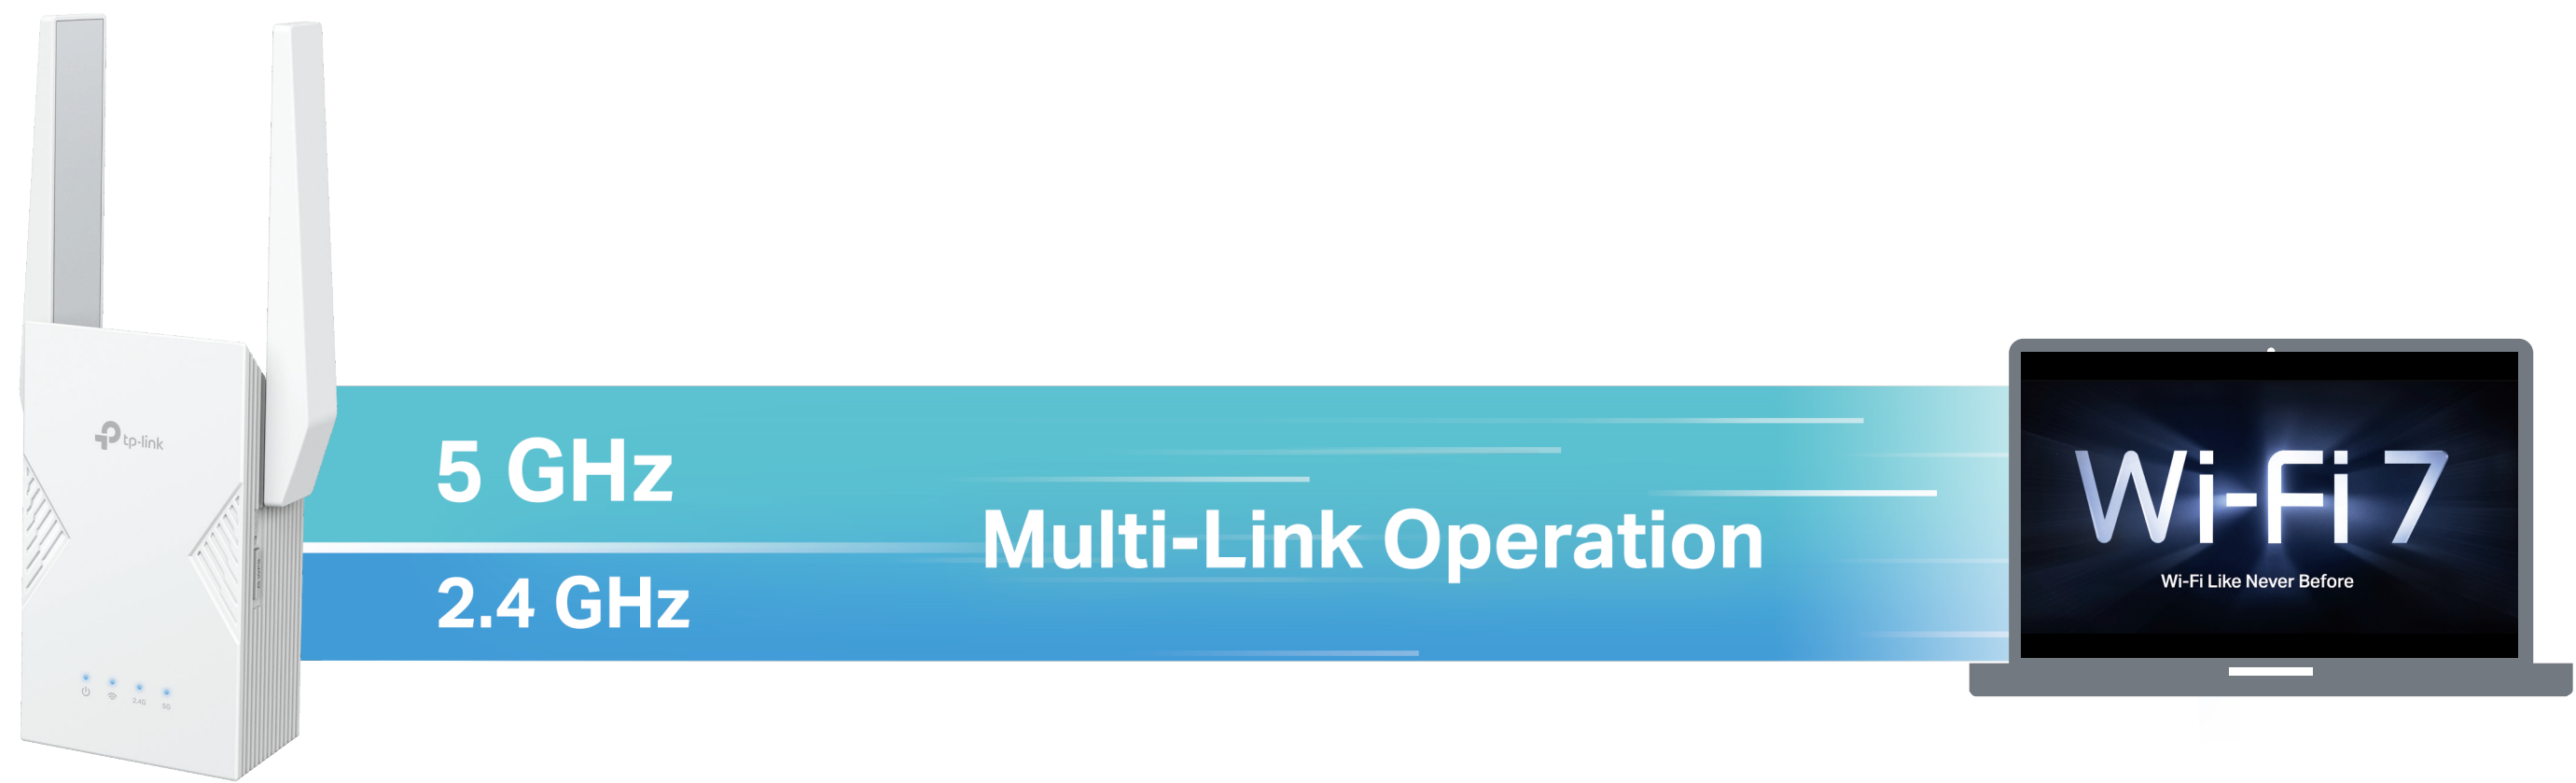

((•)) 3.6 Gbps Dual-Band Wi-Fi[†]

4K QAM Higher Transmission Efficiency with 4K-QAM^Δ


✓ Ultra Smooth Wi-Fi with 4× Lower Latency[☆]

📶 Higher Capacity for More Devices[†]

Highlights

Eliminate Wi-Fi Dead Zones with Unrivalled Wi-Fi 7

Flexible Whole Home Mesh Wi-Fi

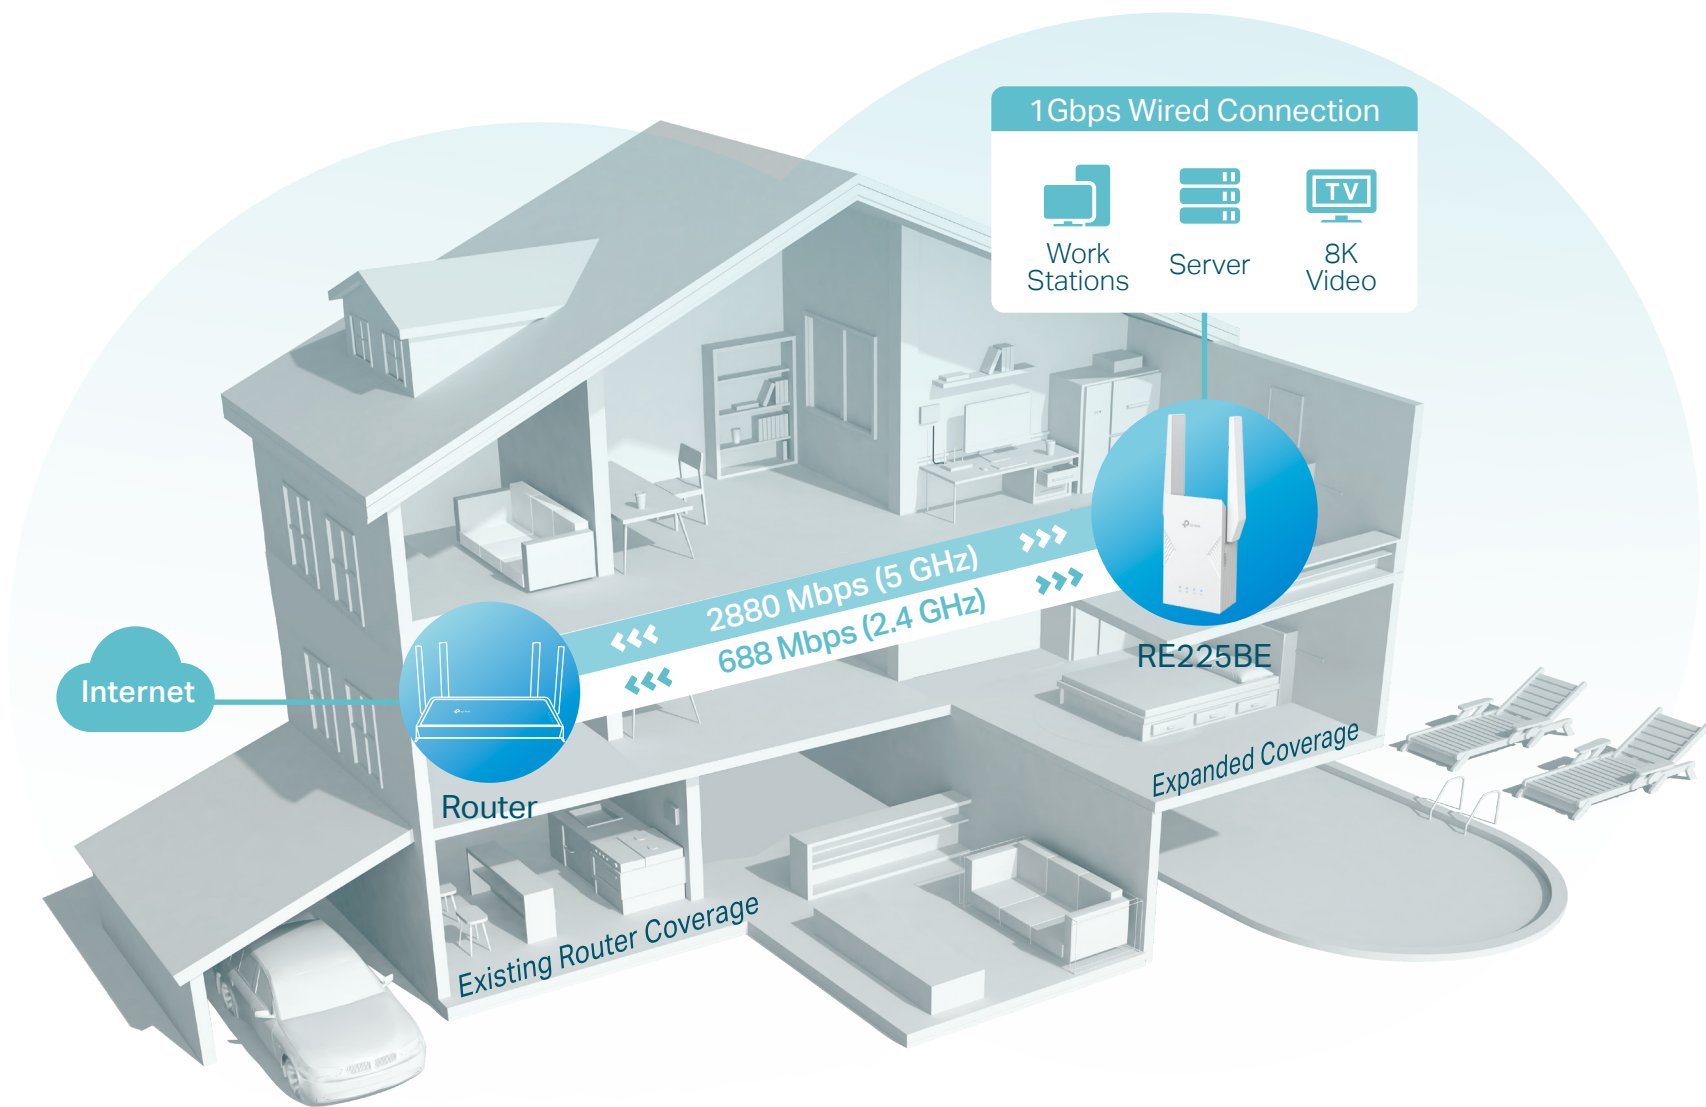

Wi-Fi Dead Zone Killer



Uninterrupted Streaming[§]



One Wi-Fi Name



Unified Management^{**}



Check the full list of TP-Link's EasyMesh-compatible extenders and routers at tp-link.com/easymesh/product-list/

Highlights

BE3600 Dual-Band Wi-Fi 7 Range Extender

1 Gbps Wired Connection

- **Range Extender Mode**

Plug your PC, smart TV, or game console into the 1 Gbps port for a smooth wired connection.



Router

RE225BE

- **Access Point Mode**

Connect RE225BE to your router to easily turn that 1G wired connection into a high-speed dual-band wireless signal.



Router

RE225BE

Eliminate Dead Zones with Wi-Fi 7

Expand your Wi-Fi with future-proof connectivity, powered by Wi-Fi 7 Multi-Link Operation (MLO), 4K-QAM.^Δ

Whole-Home Coverage Made Simple

Pair with an EasyMesh-compatible router to eliminate weak spots and create a seamless Wi-Fi network with a single Wi-Fi name.*

Enhanced Security with WPA3

Extend your Wi-Fi with confidence. WPA3 encryption keeps your home network safe and secure.◇

Smart, Adaptive Networking

Always stay connected to the fastest, most stable path for seamless performance.


Broad Compatibility

Works with all Wi-Fi generations, Wi-Fi devices, and Wi-Fi routers for worry-free connectivity.***

Specifications

Hardware

- Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- Antennas: 2 External Antennas
- Dimensions: 3.6 × 1.8 × 4.9 in (91 × 46 × 124 mm)

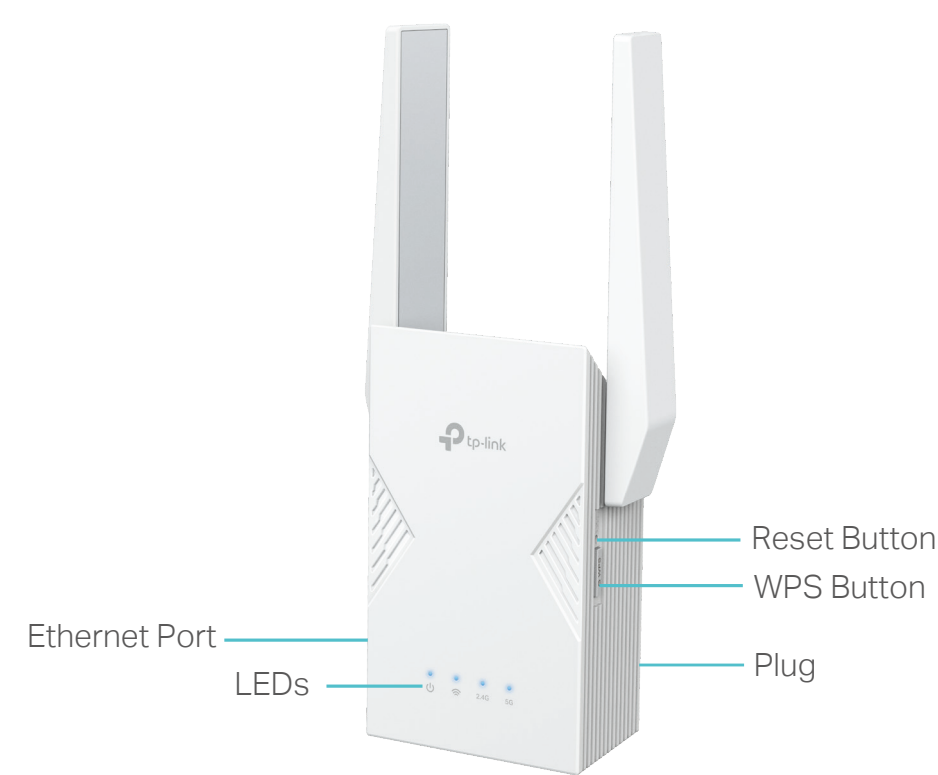

Wireless

- **Wireless Standards:** IEEE 802.11a/n/ac/ax/be 5 GHz, IEEE 802.11b/g/n/ax/be 2.4 GHz
- **Frequency:** 2.4 GHz and 5 GHz
- **Signal Rate:** 688 Mbps at 2.4 GHz, 2880 Mbps at 5 GHz
- **Transmit Power:** CE: EIRP ≤ 20dBm (2.4 GHz), EIRP ≤ 23dBm (5 GHz, band 1 and band 2), EIRP ≤ 30dBm (5 GHz, band 3)
- **Reception Sensitivity:**
2.4 GHz:
11be EHT 20 MCS0: -97dBm, 11be EHT 20 MCS13: -60dBm
11be EHT 40 MCS0: -95dBm, 11be EHT 40 MCS13: -58dBm
5 GHz:
11be EHT 20 MCS0:-97dBm, 11be EHT 20 MCS13:-60dBm
11be EHT 40 MCS0:-95dBm, 11be EHT 40 MCS13:-58dBm
11be EHT 80 MCS0:-92dBm, 11be EHT 80 MCS13:-55dBm
11be EHT 160 MCS0:-89dBm, 11be EHT 160 MCS13:-53dBm
- **Wireless Function:** LED Control, Access Control, Power Schedule, Wi-Fi Coverage
- **Wireless Security:** Enhanced Open, WPA/WPA-PSK2, WPA2/WPA3 encryptions

Others

- **Certification**
CE, RoHS
- **System Requirements**
Microsoft Edge, Firefox, Chrome, Safari, or other JavaScript-enabled browser
*You are recommended to use the latest version
- **Package Contents**
Range Extender RE225BE
Quick Installation Guide

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Higher capacity is based on laboratory test data, which analyzed the connections of different devices on the 5 GHz and 2.4 GHz bands simultaneously. These devices simulated a typical home scenario by running simultaneous applications in the same room that included 4K video, 1080p video, 720p video, file downloading, web browsing, IP cameras, and other IoT devices. Actual wireless data throughput, wireless coverage, and connected devices are not guaranteed and will vary as a result of internet service provider factors, network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location. The 160 MHz bandwidth might not be available on the 5 GHz band in some regions/countries due to regulatory limits on the spectrum, hence the theoretical speeds may vary.

‡The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated.

§Uninterrupted Streaming is designed for devices that support the 802.11k/v standard.

ΔUse of Wi-Fi 7 (802.11be), Wi-Fi 6 (802.11ax), and features including Multi-Link Operation (MLO), 320 MHz Bandwidth, 4K-QAM, Multi-RU, OFDMA, and MU-MIMO requires clients to also support the corresponding features.

*TP-Link EasyMesh-compatible products can network with other devices that use EasyMesh. Failed connections may be due to firmware conflicts of different vendors. The EasyMesh-compatible feature is still being developed on some models and will be supported in subsequent software updates. This product is compatible with standardized EasyMesh technology but has not obtained the Wi-Fi EasyMesh™ certification.

**Unified management is available for TP-Link EasyMesh-compatible devices. This feature is not guaranteed for devices from other vendors.

***Wi-Fi generations represent the wireless standard IEEE 802.11 a/b/g/n/ac/ax/be. All devices need to support 802.11 Wi-Fi protocols.

◇Use of WPA3 requires clients to also support the corresponding feature.

☆4× Lower Latency refers to the latency improvement of Wi-Fi 7 range extenders compared to Wi-Fi 6 range extenders, based on laboratory test data. The test conditions had the same 5 GHz single-frequency wireless interference and tested the maximum latencies of Wi-Fi 7 clients (with MLO turned on) connecting to the 5 GHz and 2.4 GHz bands of RE225BE (with MLO turned on) simultaneously and to the 5 GHz bands of a Wi-Fi 6 range extender (without the MLO function).

Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, internet service provider factors, and other environmental conditions.

This range extender may not support all the mandatory features as ratified in the IEEE 802.11be specification.

This product is compatible with standardized EasyMesh technology but has not obtained the Wi-Fi EasyMesh™ certification.

Further software upgrades for feature availability may be required.

Pictures are for reference only. If there are any inconsistencies between the product image and the actual product, the actual product shall prevail.

©2025 TP-Link