Product information sheet	
Supplier's name or trade mark:	TP-Link，Tapo
Model identifier:	Tapo C720（light source of Tapo C720）
Type of light source	/

Lighting technology	[HL☐/LFL T5 HF☐/ LFL T5 HO☐/CFni☐/other FL ☐/HPS☐/MH☐/other HID☐/LED☒/OLED☐ /mixed☐/other☐]	Non-directional or directional:	[NDLS☐/DLS☒]
Mains or non-mains	[MLS☒/NMLS☐]	Connected light source(CLS)	[yes☐/no☒]
Colour-tuneable light source	[yes☐/no☒]	Envelope	[no☒/second☐/non-clear☐]
High luminance light source	[yes☐/no☒]		
Anti-glare shield	[yes☐/no☒]	Dimmable	[Yes☐/only☐/ with specific dimmers/no☒]
On-mode power, expressed in W	22 W	EEI class	[A☐/B☐/C☐/D☒/E☐/F☐/G☐][(d)]
Useful luminous flux (lm)& Beam angle correspondence	2800 lm in [sphere360°☐ /wide cone120°☐/narrow cone90°☒]	Correlated colour temperature type	5000K
On-mode power (W)	22	Standby power (W)	0.00
Networked standby power for CLS (W)	NA	Colour rendering index	80
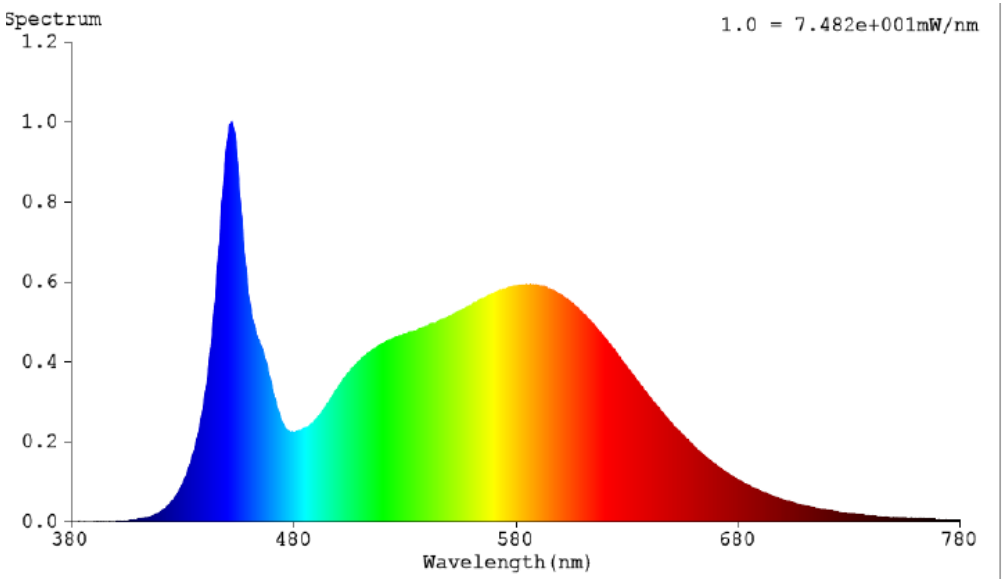
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	331.77或332	Chromaticity coordinates (x and y)	0.349,0.358
	Width	331.77或332		
	Depth	145.85或146		
R9 Colour rendering index		0	Survival factor	1.00
Lumen maintenance factor		0.96	Colour consistency in McAdam ellipses	5
Displacement factor (cos φ1)		0.9	Claim of equivalent power (W)	NA
Flicker metric (Pst LM)		0.1	Stroboscopic effect metric (SVM)	0.1
Rated L70B50 life（hours）		**30000**	Peak luminous intensity[cd]	2000
Beam angle[°]		80	Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage [W](LED and OLED mains)	☒N/A
Spectral power distribution in the range 250 nm to 800 nm, at full-load