


Product information sheet	
Supplier's name or trade mark:	TP-Link, Tapo
Model identifier:	Tapo L430C
<u>Type of light source</u>	E14

Lighting technology	[HL ☐ /LFL T5 HF ☐ / LFL T5 HO ☐ /CFni ☐ /other FL ☐ /HPS ☐ /MH ☐ /other HID ☐ /LED ☒ /OLED ☐ /mixed ☐ /other <input]]<="" td="" type="checkbox"/> <td>Non-directional or directional:</td> <td>[NDLS☒/DLS<input]]<="" td="" type="checkbox"/></td>	Non-directional or directional:	[NDLS ☒ /DLS <input]]<="" td="" type="checkbox"/>
Mains or non-mains	[MLS ☒ /NMLS <input]]<="" td="" type="checkbox"/> <td>Connected light source(CLS)</td> <td>[yes☒/no<input]]<="" td="" type="checkbox"/></td>	Connected light source(CLS)	[yes ☒ /no <input]]<="" td="" type="checkbox"/>
Colour-tuneable light source	[yes ☒ /no <input]]<="" td="" type="checkbox"/> <td>Envelope</td> <td>[no☒/second☐/non-clear<input]]<="" td="" type="checkbox"/></td>	Envelope	[no ☒ /second ☐ /non-clear <input]]<="" td="" type="checkbox"/>
High luminance light source	[yes ☐ /no <input]]<="" checked="" td="" type="checkbox"/> <td></td> <td></td>		
Anti-glare shield	[yes ☐ /no <input]]<="" checked="" td="" type="checkbox"/> <td>Dimmable</td> <td>[Yes☒/only☐/ with specific dimmers/no<input]]<="" td="" type="checkbox"/></td>	Dimmable	[Yes ☒ /only ☐ / with specific dimmers/no <input]]<="" td="" type="checkbox"/>
On-mode power, expressed in W	5	EEL class	[A ☐ /B ☐ /C ☐ /D ☐ /E ☐ /F ☒ /G <input]]<sup="" type="checkbox"/> (d)
Useful luminous flux (lm)& Beam angle correspondence	470 lm in [sphere360° ☒ /wide cone120° ☐ /narrow cone90° <input]]<="" td="" type="checkbox"/> <td>Correlated colour temperature type</td> <td>2500-6500 K Default 2700K</td>	Correlated colour temperature type	2500-6500 K Default 2700K
On-mode power (W)	4.8	Standby power (W)	0.00
Networked standby power for CLS (W)	0.50	Colour rendering index	80

Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	115	Chromaticity coordinates (x and y)	0.463, 0.420
	Width	38		
	Depth	38		
R9 Colour rendering index		8	Survival factor	1.00
Lumen maintenance factor		0.96	Colour consistency in McAdam ellipses	6
Displacement factor (cos ϕ_1)		0.9	Claim of equivalent power (W)	40
Flicker metric (Pst LM)		0.1	Stroboscopic effect metric (SVM)	0.1
Rated L70B50 life (hours)		25000	Peak luminous intensity[cd]	[Yes ☐ /- ☒
Beam angle[°]		☒ N/A	Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage [W](LED and OLED mains)	☒ N/A
Spectral power distribution in the range 250 nm to 800 nm, at full-load		Spectrum 1.0 = 1.057e+001mW/nm  Wavelength (nm)		

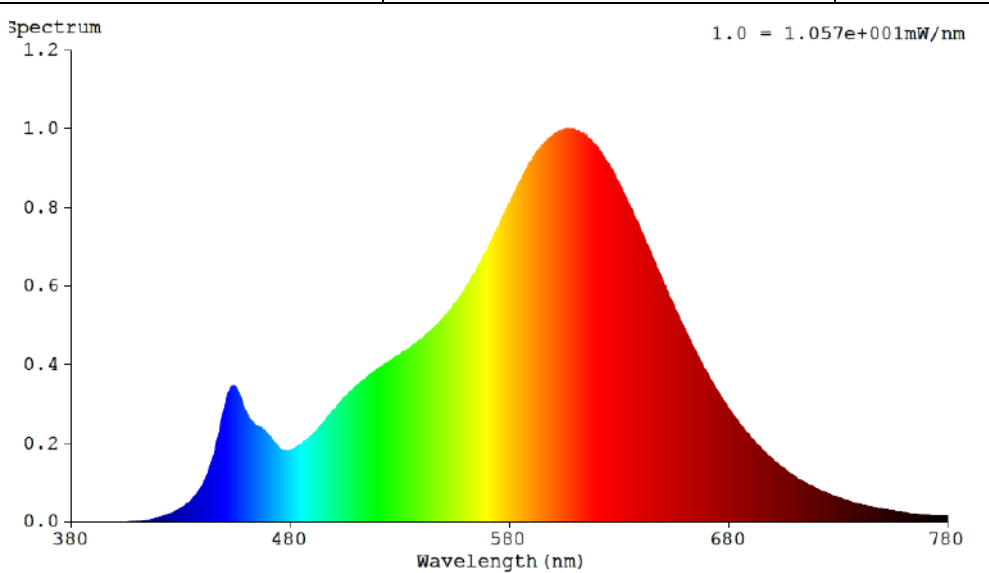