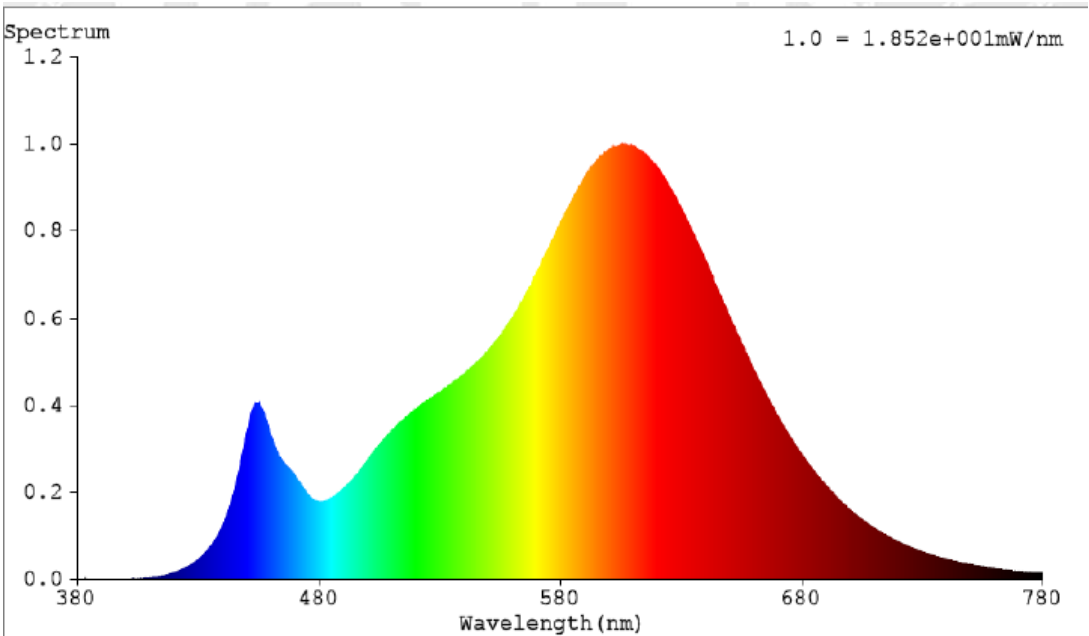


Supplier's trade mark: tp-link

Model: Tapo L510E 3.0, Tapo L510B 3.0

CAP Type of light source: Tapo L510E: E27, Tapo L510B:B22

Lighting technology		[HL ☐ /LFL T5 HF ☐ / LFL T5 HO ☐ /CFni ☐ /other FL ☐ /HPS ☐ /MH ☐ /other HID ☐ /LED ☒ /OLED ☐ /mixed ☐ /other ☐	Non-directional or directional:	[NDLS ☒ /DLS ☐
Mains or non-mains		[MLS ☒ /NMLS ☐	Connected light source(CLS)	[yes ☒ /no ☐
Colour-tuneable light source		[yes ☐ /no ☒	Envelope	[no ☒ /second ☐ /non-clear ☐
High luminance light source		[yes ☐ /no ☒		
Anti-glare shield		[yes ☐ /no ☒	Dimmable	[Yes ☒ /only ☐ / with specific dimmers/no ☐
On-mode power, expressed in W		9 W	EEI class	[A ☐ /B ☐ /C ☐ /D ☐ /E ☐ /F ☒ /G ☐] ^(d)
Useful luminous flux (lm)& Beam angle correspondence		806 lm in [sphere360° ☒ /wide cone120° ☐ /narrow cone90° ☐	Correlated colour temperature type	2700 K
On-mode power (W)		8.3	Standby power (W)	0.00
Networked standby power for CLS (W)		0.4	Colour rendering index	80
Outer dimensions without separate control gear, lighting control parts and	Height	115	Chromaticity coordinates (x and y)	0.457,0.408
	Width	60		

non-lighting control parts, if any (millimetre)	Depth	60		
R9 Colour rendering index		8	Survival factor	1.00
Lumen maintenance factor		0.95	Colour consistency in McAdam ellipses	6
Displacement factor (cos ϕ_1)		0.9	Claim of equivalent power (W)	60
Flicker metric (Pst LM)		0.1	Stroboscopic effect metric (SVM)	0.1
Rated $L_{70}B_{50}$ life (hours)		25000	Peak luminous intensity[cd]	[Yes ☐ /- ☒
Beam angle[°]		☒ N/A	Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage [W](LED and OLED mains)	☒ N/A
Spectral power distribution in the range 250 nm to 800 nm, at full-load		 Spectrum 1.0 = 1.852e+001mW/nm Wavelength (nm)		