

1 to 2 Gigabit Ethernet Splitter

Bridge Devices, Expand Connections







Dual Device Access



1000 Mbps Speed



Power & Ethernet Cable Included



Durable Metal Case




Plug and Play

Highlights

Simultaneous Internet Access for Two Devices

EH210 is compatible with Cat 8/7/6/5e/5 network Ethernet cables and can be used with hubs, switches, routers, wireless devices, computers, and more. *This product cannot be used without a power source.

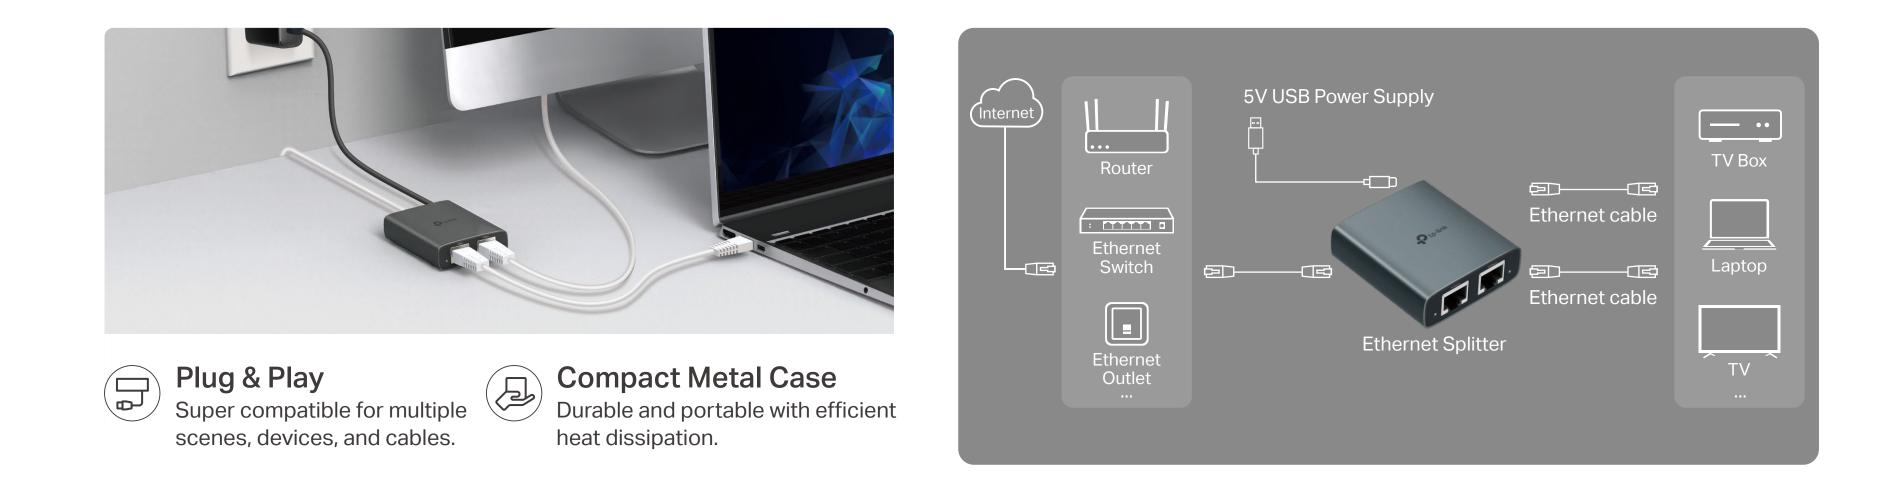

Specifications

Hardware

- Ethernet Ports: 3× 10/100/1000 Mbps RJ45 Ports (Auto-Negotiation, Auto MDI/MDIX, Half and Full Duplex)
- · Power: USB-C, 5VDC / 0.3A
- · LED: 1× Power, 3× Ports

Physical

- Dimension (W×D×H):
 - 2.3 × 2.1 × 0.7 in (58 × 53 × 18.4 mm)
- · Cable:
 - Cat 8, Cat 7, Cat 6, Cat 5e, Cat 5
- · Package Contents:
 - 1× Ethernet Splitter (EH210)
 - 1× USB Power Cable
 - 1 × Cat 5e Ethernet Cable
 - Quick Installation Guide



回致講論回 For more information, please visit

https://www.tp-link.com/products/details/?model=EH210_V1

or scan the QR code left

For technical support, please visit: https://www.tp-link.com/support

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device must accept any interference received, including interference that may cause undesired operation. Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders *This product cannot be used without a power source.

**Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, internet service provider factors, and other environmental conditions ©2025 TP-Link

Others

- · Advanced:

Hubs, switches, routers, wireless devices, computers, and more.

· Supported Systems:

Windows, iOS, macOS, iPadOS, Chrome OS, Linux, Android

· Certification: CE, FCC, RoHS, BSMI

· Operating Temperature/Humidity:

0°C~40°C(32°F~104°F)/10%~90% RH, Non-Condensing

Green Technology, 802.3x Flow Control, 802.1p/DSCP QoS

Devices Supported:

www.tp-link.com