

SuperSpeed USB 3.0 **4-Port Portable Hub**

Bridge Devices, Expand Connections













Foldable Design

10x Data Transfer Rate*

Plug & Play

Highlights

Connect up to 4 devices at a time

UH400 is perfect for anyone who has a computer with only one or two USB ports and wants easier access to additional ports without having to switch between devices. UH400 gives users the freedom to connect up to 4 devices at a time.

Transfer speeds of up to 5Gbps

The 4 USB 3.0 ports support up to 5 Gbps transfer speed, 10 times faster than USB 2.0. It's also backward compatible with USB 2.0/1.1. The rapid transfer speeds of this device grant users full access to a highly functional data sharing data-sharing highway.






Protect Both Your Devices and Precious Data

UH400 has a sophisticated circuit design with multiple protections for your devices against over-heating, over-current, over-voltage and short circuit. A built-in surge protector keeps both your devices and data safe in the process of transferring data.

UH400 support USB ports hot swapping that can be safely connected and disconnected while the computer is powered on and running.



Features

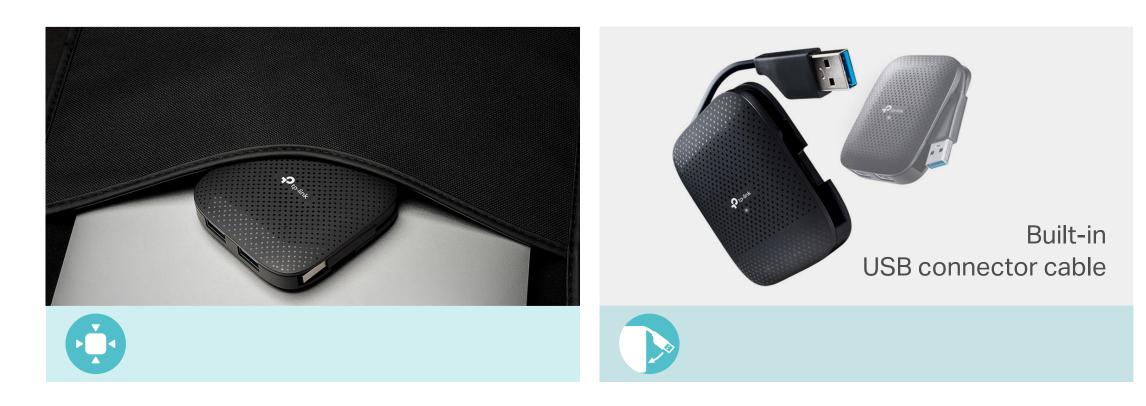

Ultra compact design

A highly portable device that comes in a compact, lightweight design. A nicely built compact sized makes it easier to store in your laptop pouch.

Built-in USB connector cable

A foldable cord design enables a more convenient way for storage or travelling.



No driver required

UH400 supports Plug and Play feature for devices running Windows(7 & later versions), Mac OS (10.5 & later versions), macOS Sierra, Chrome OS and Linux OS systems.

Specifications

Hardware

- Interface:
 4× USB 3.0 Type-A ports
- Connector: 1 × USB-A 3.0 Connector

Physical

- Dimension (W×D×H):
 2.8 x 2.8 x 0.7 in. (71 x 71 x 16.6 mm)
- Package Contents:
 1 × USB 3.0 4-Port Hub UH400
 1 × Quick Installation Guide



For more information, please visit

https://www.tp-link.com/products/details/?model=UH400_V5

or scan the QR code left

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders. *USB 3.0 is designed as 10x fast as USB 2.0. Actual transfer rate is subject to configuration of the connected devices. ©2025 TP-Link

Others

- Supported Systems:
 Windows, Mac OS X, macOS, Chrome OS, and Linux OS
- Certification: CE, FCC, RoHS, BSMI
- Environment:

Operating Temperature: 0°C~40°C (32°F~104°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing