


16 Channel PoE+ Network Video Recorder

MODEL: VIGI NVR2016H-16MP





4K HDMI Output Provides Finer Details and Crystal Clarity Quick Playback 16-Channel Synchronous Playback* 2 SATA Interfaces Up to 16 TB Capability for Each HDD**

Ptp-link

Remote Management
Dedicated VIGI app and PC Client

ONVIF Comprehensive Compatibility

Overview

VIGI Surveillance Solution

The VIGI network video recorder coordinates with camera systems to help you view, store, and play back videos.

Highlight



16-Channel Live View

Display each surveilled zone in real-time on a single interface for comprehensive control.



16× PoE+ Ports for Simple Deployment

Easily connect and power your PoE camera with one RJ45 cable transmitting both data and power.



4K HDMI Output

Show more details with up to 8MP resolution for one channel and 20MP decoding capacity in total for all channels.



Remote Management

Take full control over your security anytime and anywhere on the VIGI app or PC client.



Practical Playback


Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.



Non-Stop Recording

Stores up to 32 TB of footage from connected cameras to secure your data for quick and convenient access.

Network Topology

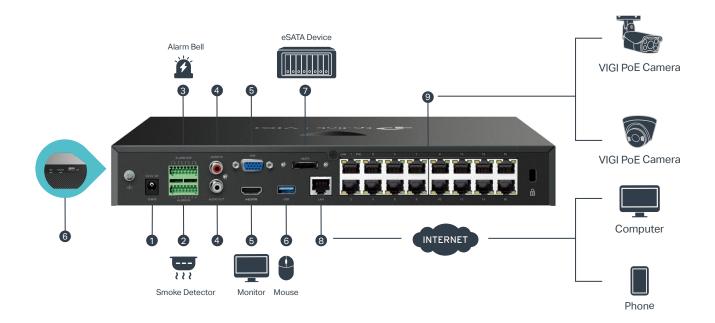

- 1. Power Supply
- 2. 6× Alarm IN Ports to Connect External Sensors
- 3. 4× Alarm OUT Ports to Connect Alarm Devices
- 4. AUDIO IN and AUDIO OUT for Two-Way Audio
- 5. HDMI and VGA for Video Independent Output
- 6. 1× USB 3.0 Port (Rear) and 1× USB 2.0 Port (Front) for Mouse and Keyboard Connections
- 7. 1× eSATA Port to Connect an External Storage Device**
- 8. 1× 10/100/1000 Mbps LAN Port for Ethernet Connection
- 9. 16× PoE+ Ports to Connect and Power Your Cameras

 $^{\rm a}\text{A}$ hard disk drive (not included) must be installed for operation. ©2024 TP-Link

 $^{^{\}dagger}\text{HDD}$ is not included.

[‡]Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

Specifications

NVR		
Product Model	VIGI NVR2016H-16MP	
Video and Audio		
IP Video Input	16-Channel	
Incoming Bandwidth	320 Mbps	
Outgoing Bandwidth	320 Mbps	
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz	
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz	
Video Output Mode	HDMI/VGA Independent Output	
Multi-View Display	1/4/6/8/9/16	
Decoding		
Audio Compression	G.711A/G.711U/G.726	
Video Compression	H.265+/H.265/ H.264+/H.264	
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous Playback	16-Channel†	
Capability	 25fps: 10-ch @ 3MP, 16-ch @ 1080P 30fps: 4-ch @ 8MP, 6-ch @ 5MP, 8-ch @ 4MP 	
Record Management		
Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording	
Playback Mode	Instant Playback, Rgular Playback, Tag Playback, Event Playback	
Backup Mode	Regular Backup, Video Clip Backup	
Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/ Off	
Network		
Network Protocols	UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, IPv6, SNMP, ARP	
Interoperability	ONVIF Profile S, CGI	
Mobile Phone Access	Android, iOS	
Browser	Chrome (57+), Firefox (52+), Edge (91+), Safari (11+)	

PoE	
Interface	1-16, RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
Power	140 [△] W Available for All PoE+ Ports, 30 W Max per Port
Standard	802.3at/af Compliant
External Interface	
Network Interface	1, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface
USB Interface	1 Front USB 2.0 Port, 1 Rear USB 3.0 Port
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	6/4
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	1*
HDMI	1
VGA	1
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 16 TB Capacity for Each HDD*
Alarm	
General Alarm	 Motion Detection Video Tampering Scene Change Detection Line-Crossing Detection Intrusion Detection Region Entering Detection Region Exiting Detection Loitering Detection Object Abandoned/Removal Detection Vehicle Detection Human Detection Abnormal Sound Detection Smart Frame Note: The alarm function requires the use of a camera.
Anomaly Alarm	 Video Loss Offline and IP Conflict Disk Exception Login Exception Fan Exception Note: The alarm function requires the use of a camera.
Alarm Linkage	 Recording White Light Alarm Buzzer Log Audible Alarm Note: The alarm function requires the use of a camera.

General		
Package Contents	 VIGI Network Video Recorder Power Adapter Power Cables HDD Power Cables HDD Data Cables Mounting Accessories Mouse Quick Installation Guide 	
Power Supply	DC 53.5V/3.37A	
Max Power Consumption (Without Disk)	6.2 W	
Max Power Consumption (With Disk)	40W	
Working Temperature	• NVR: -10–55 °C • Power Adapter: 0–40 °C	
Storage Temperature	-40-70 °C	
Working Humidity	10%~90% RH Non-Condensing	
Storage Humidity	10%~90% RH Non-Condensing	
Product Dimensions (W \times D \times H)	13.0 × 11.2 × 1.8 in (330 × 285 × 45 mm)	
Net Weight	2.2 Kg [#]	
Gross Weight	4.2 Kg [#]	
Certification	CE, NTRA, BSMI, VCCI, FCC, HDMI, ONVIF	



[^]Calculations are based on laboratory testing. Actual data is not guaranteed and will vary as a result of client limitations and environmental factors.

*A hard disk drive (not included) must be installed for operation.

[†]The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 32MP.

^{*}This model currently supports ONVIF Profile S.

[#]Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.