

Security Sensor Starter Kit



Tapo T31 KIT



Comprehensive Protection for Every Entry Point



Window and Door Safeguard



Triggers Hub Alarm



Instant App Notifications




Secure, Detect & Automate with Smart Sensors



// Highlights

Integrated Security: Tapo Sensors and Cameras in Sync


When a door or window opens, paired Tapo pan/tilt cameras instantly track the intruder and activate an alarm.

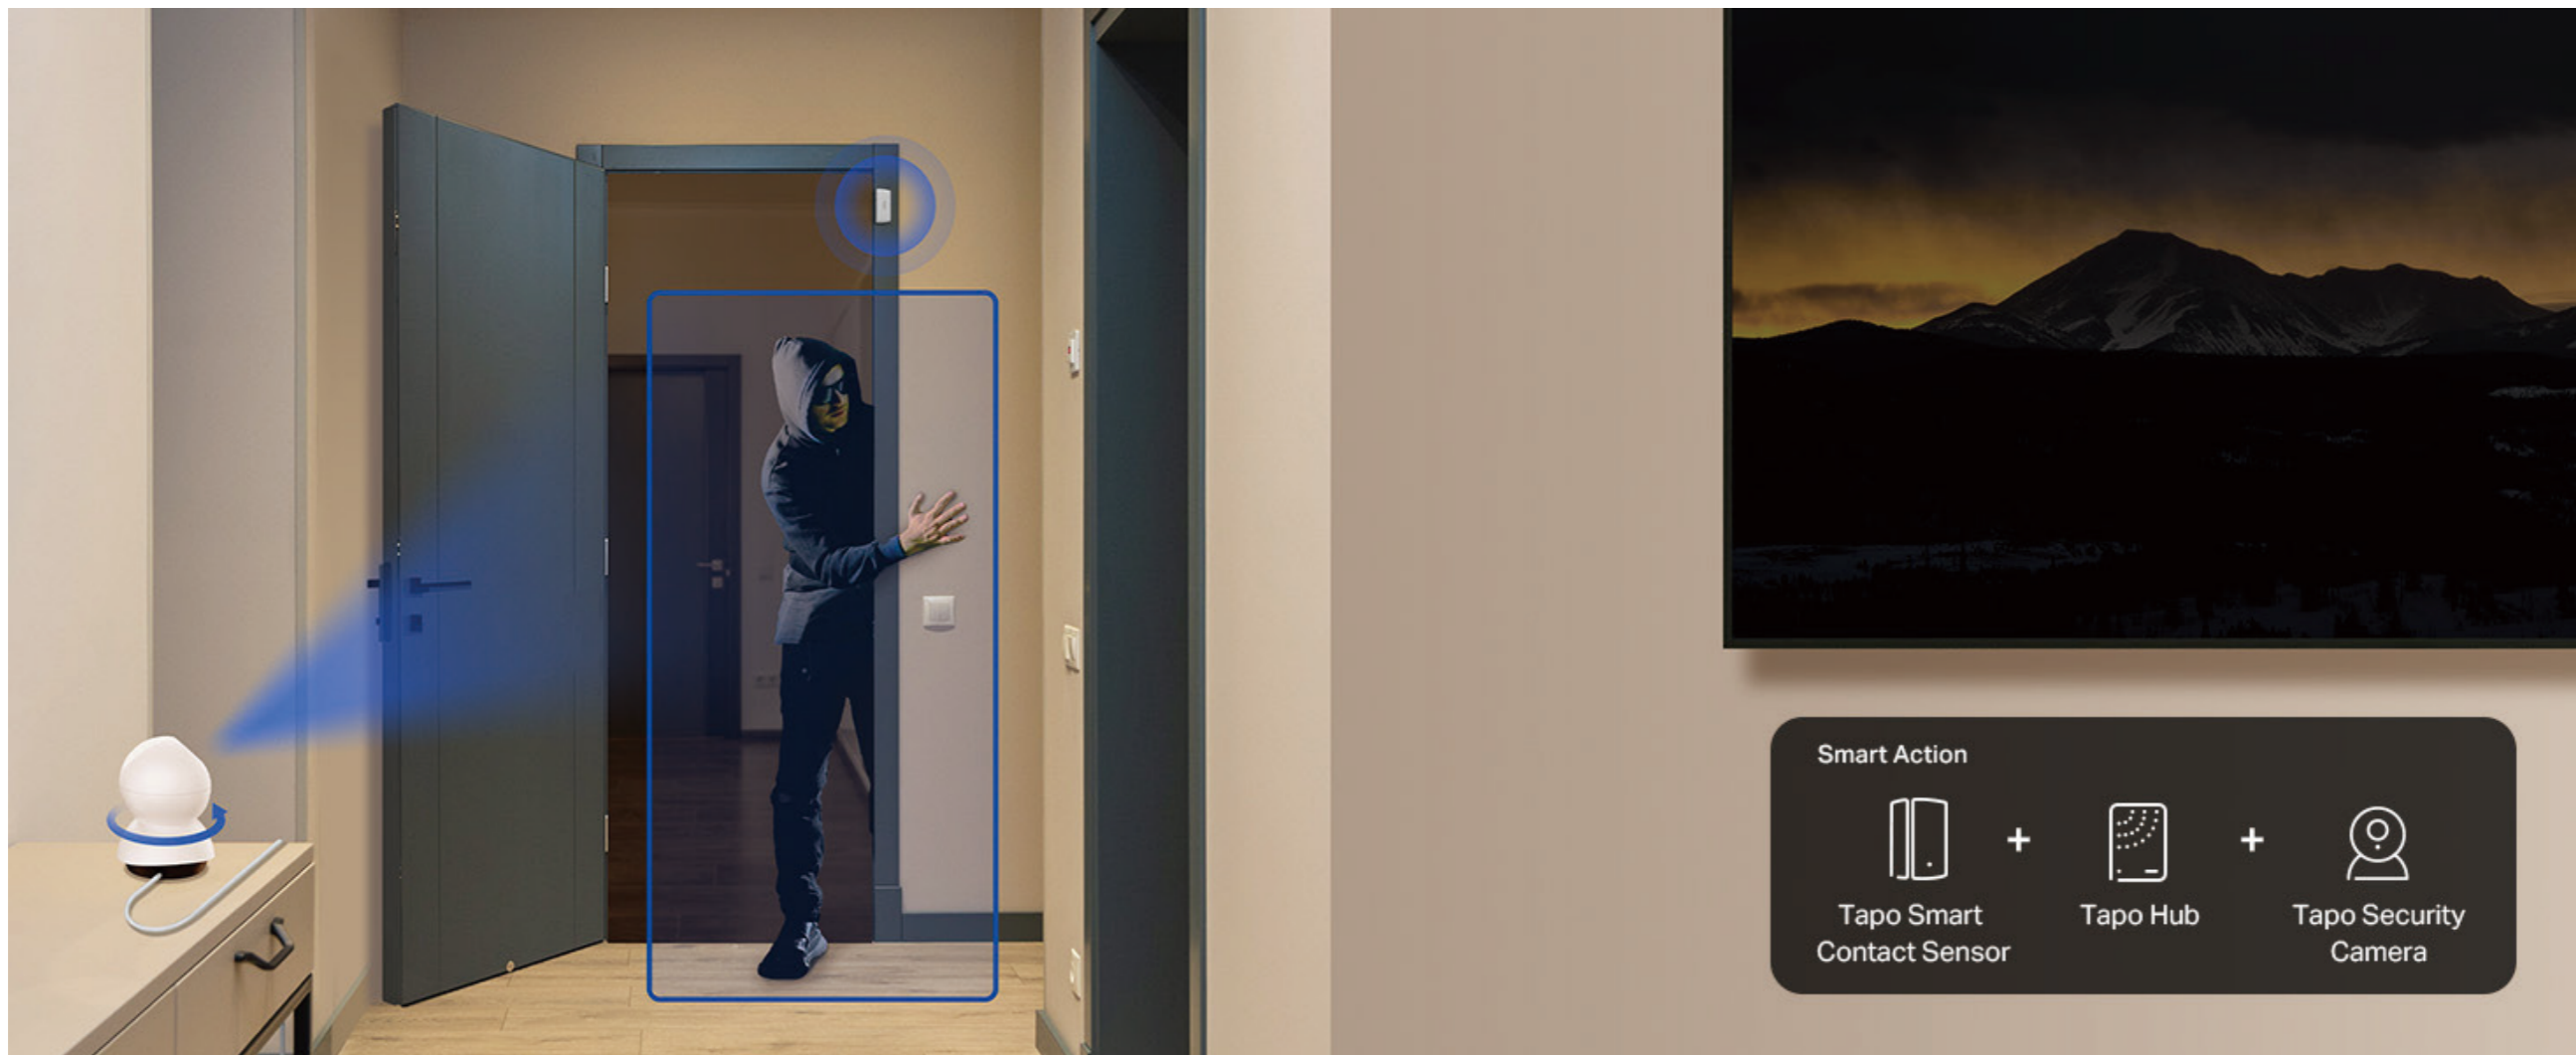

// Highlights

Smart Sensor & Lighting Synergy: Automated Room Lighting

Pair the contact sensor with smart lighting fixtures to automatically illuminate closets, laundry rooms, and other areas when you open the door.

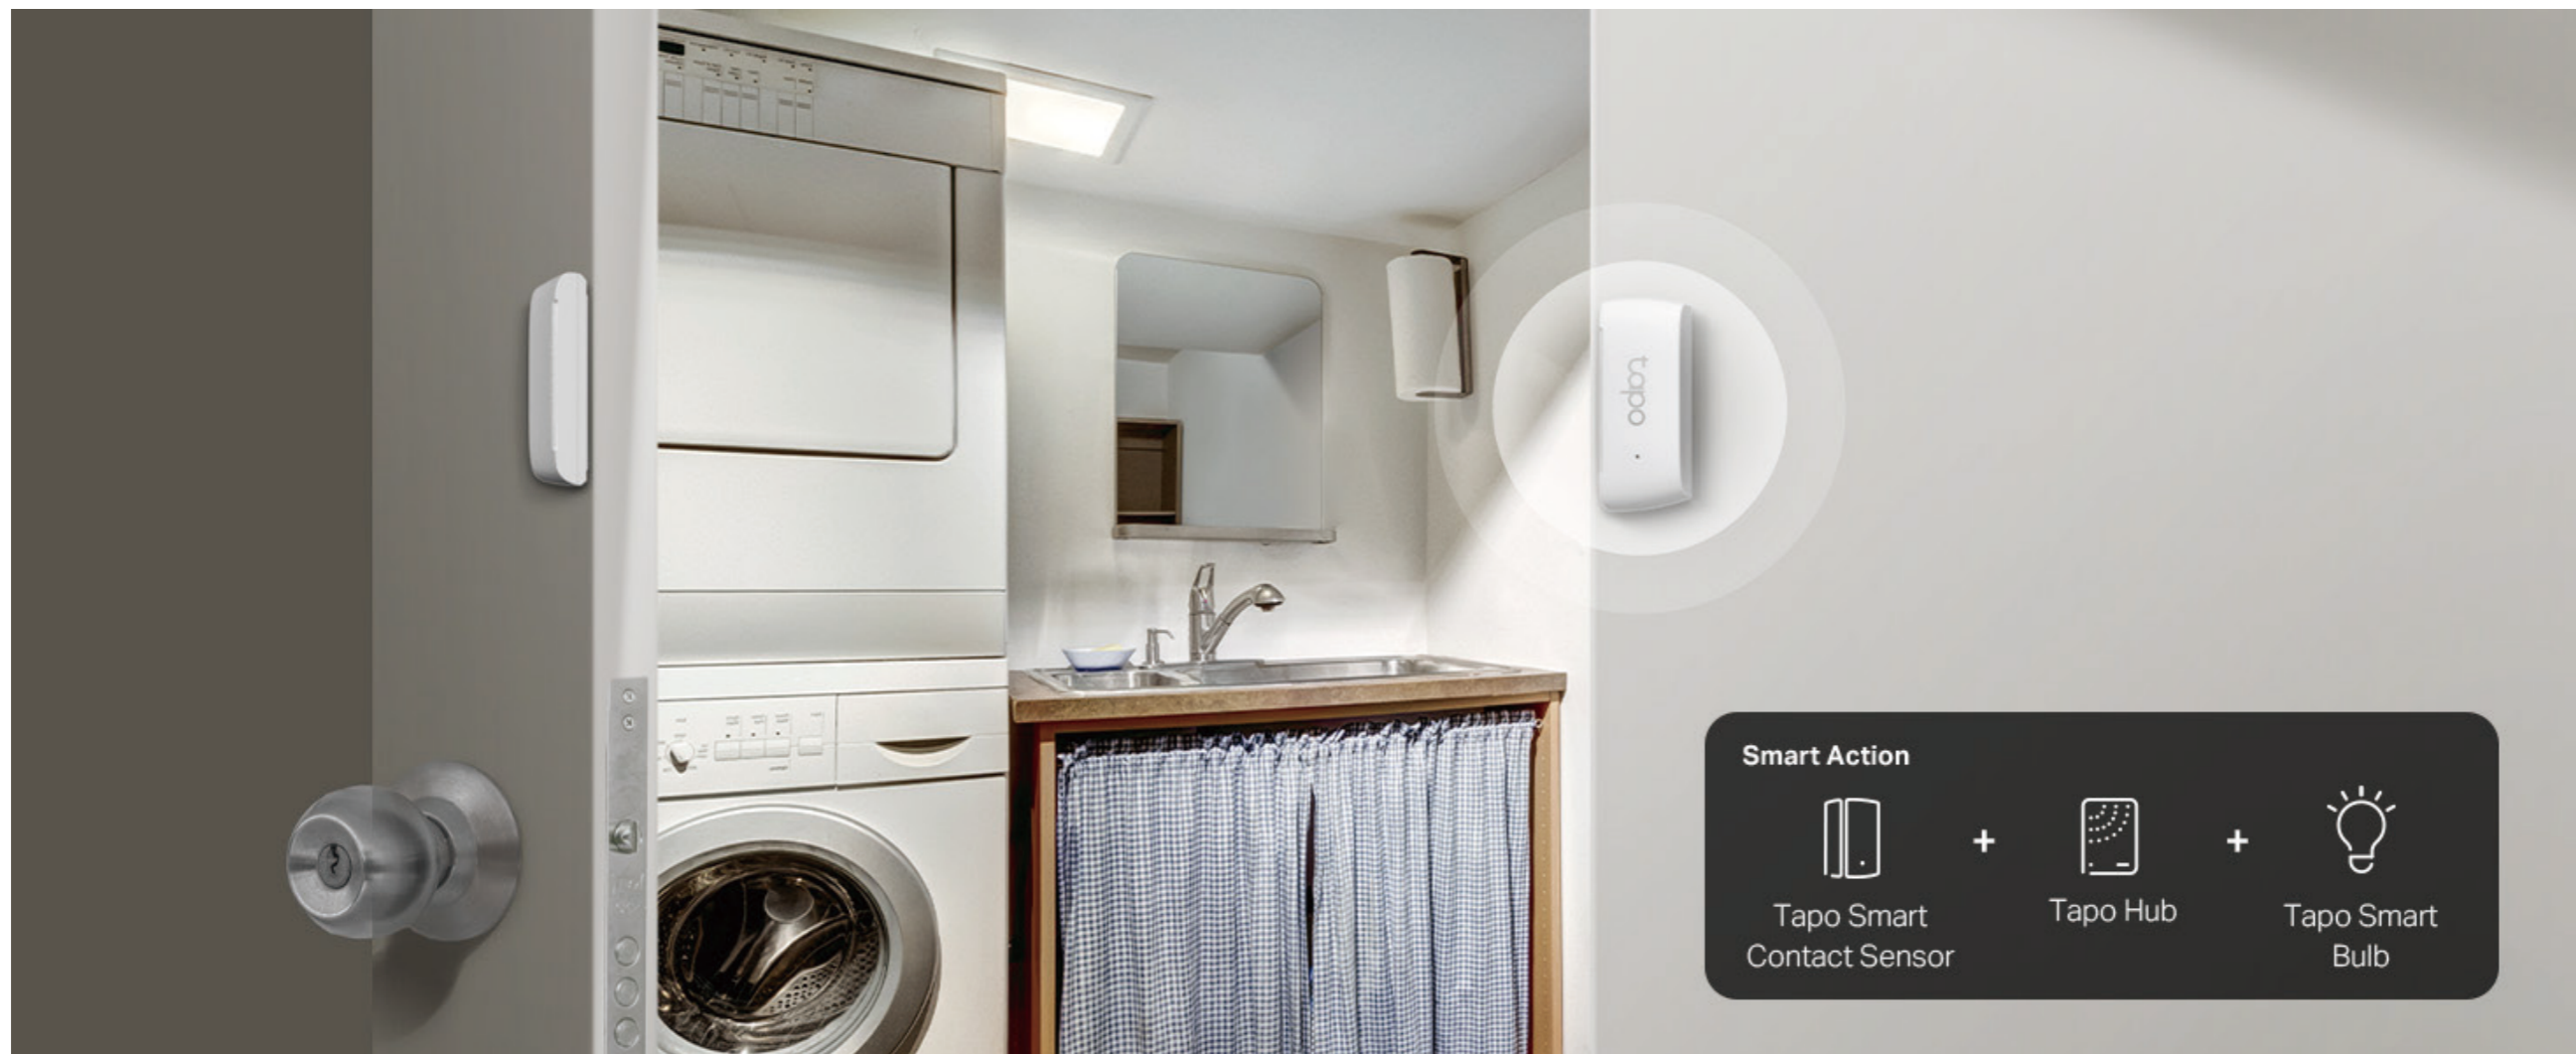

// Highlights

Secure Your Home with Alarms & Real-Time Notifications

For enhanced security, the contact sensor activates a 90dB alarm on the Tapo hub and an app notification upon detecting unusual activity. Review the activity log in the Tapo app for specific detection times from anywhere, at anytime.



// Features

- **Local Mode**

With the Tapo Hub, sub-devices and home automation work consistently within a Local Area Network (LAN), regardless of network conditions.

- **Window/ Door Safeguard (for T110)**

Monitor the opening & closing of windows, doors, cabinets, the fridge, or the mailbox in real time.

- **Real-Time Notifications**

Trigger Hub alarm and send you notifications via Tapo app whenever doors/ windows are open.

- **Smart Actions Support**

Connect the actions with other smart devices whenever doors/ windows are open for security or home automation.

- **Battery Powered**

Battery-powered design with 2+ year# battery life.

- **Easy Setup and Use**

- Set up quickly and easily through the free Tapo app.

- **Easy Installation**

Mount it by attached 3M adhesive.

// Specifications

Tapo H100

General

- Wireless: 2.4 GHz Wi-Fi, 922 MHz for connected devices[§]
- Rating: AC, 100-240 V, 50/60 Hz
- Power Consumption: 0.5 W
- Standby Power Consumption: 0.1 W
- Material: V-0 (UL-94) Flame retardant PC[^]
- LED & Button: Status LED, SYNC/Silence Button
- Built-in: 90 dB[‡] alarm, 19 ringtones

Others

- Operating Temperature: 0 °C– 40 °C (32°F–104°F)
- Operating Humidity: 10%–90%RH, Non-condensing
- Dimensions: 72×51×56.8 mm (2.8×2.0×2.2 inch)



Tapo T110

General

- Wireless: 922 MHz[^]
 - Notifications: Tapo Hub alarm, Tapo app notifications
 - Battery Life: 2 Year+[#]
- *Tapo Hub Required

Others

- Operating Temperature: 0 °C– 40 °C (32°F–104°F)
- Operating Humidity: 10%–90%RH, Non-condensing
- Dimensions:
Sensor: 61.4 × 25 × 12.3 mm (2.4 x 1.0 x 0.5 inch)
Magnet: 60.6 x 12.5 x 12.1 mm (2.4 x 0.5 x 0.5 inch)



[§]The specific working frequency bands are 920.9 MHz, 921.7 MHz, and 922.3 MHz.

[^]Made with V-0 (UL94) flame-retardant materials.

[‡]Decibel values may vary by ringtones and environmental factors.

[^]The specific working frequencies are 920.9 MHz to 923.3 MHz.

[#]Based on TP-Link's laboratory results. Actual battery life may vary depending on working conditions and environment.

Please do not use in damp environments or outdoors. For more information, please visit <https://www.tapo.com/>

// Specifications

Others

- Package Contents:

Tapo H100 × 1

3M Adhesive × 9

Tapo T110 × 3

Quick Start Guide

Battery CR2032 × 3

- Certifications: FCC, RoHS