

# Indoor/Outdoor Pan/Tilt Security Wi-Fi Camera

3K  
5MP

Tapo C236



## Flexible Indoor and Outdoor Placement

Person/Pet/Vehicle  
Detection and Tracking

Color Night Vision  
with Spotlights


IP65 Water and  
Dust Resistance



## // Highlight

### **Add Security to Your Home. Wherever. Whenever.**

Enjoy flexible placement indoors or outdoors. Get all-round protection with a 3K 5MP live view, displaying vivid colors even at night.

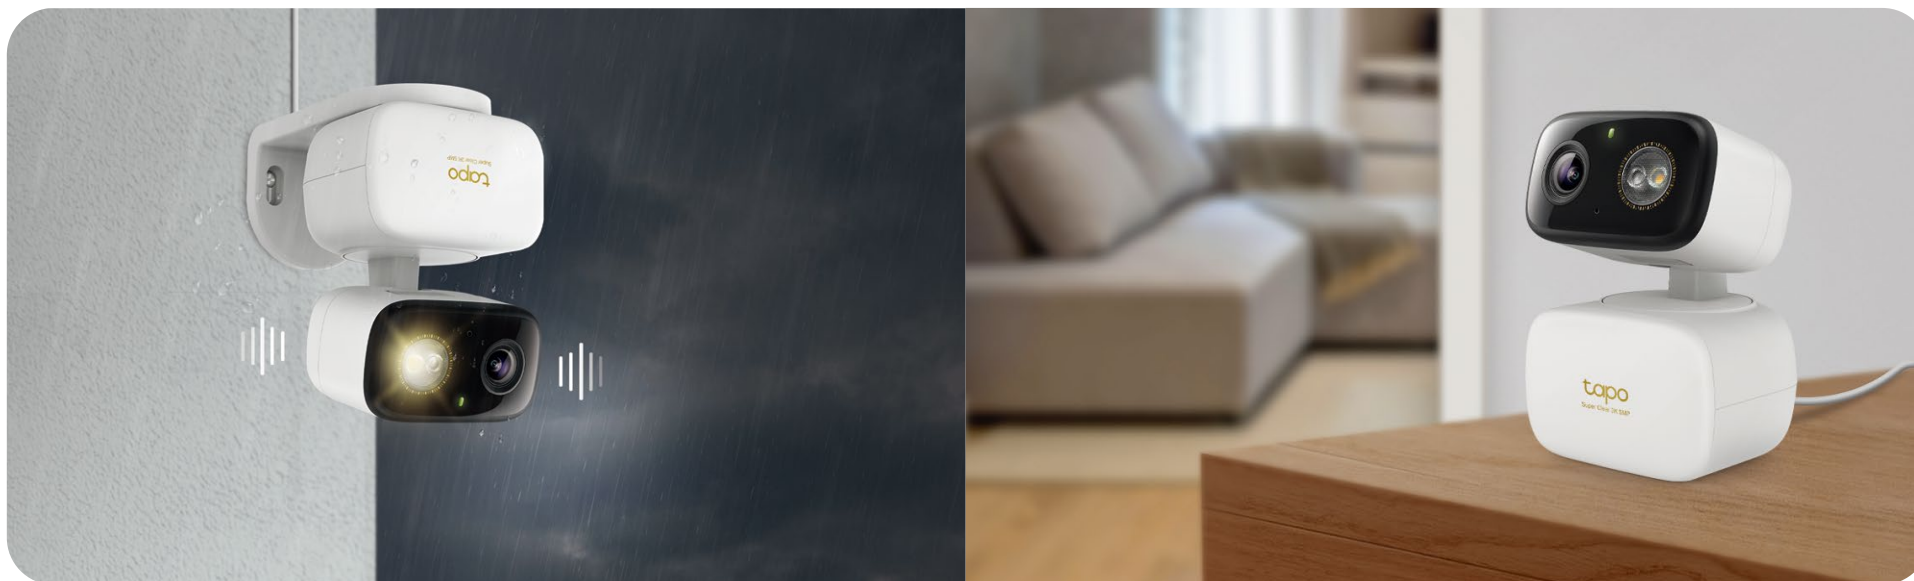

## // Features



### Motion Detection and Tracking

Whenever a camera detects motion, it will automatically follow the subject.



### IP65 Weatherproof

Performs well even in harsh environments with rain and dust, ideal for indoor/outdoor scenarios.



### Compact Design for Multiple Installation Methods

It can be placed upright or upside down, on a desk, hung on a wall, mounted on the ceiling, or held by a rod.



### Free Person, Pet & Vehicle Detection

Identifies people, pets, and vehicle to minimize unnecessary notifications.



### Alarm System

Trigger lights and sounds as an alarm when motion is detected.



### Color Night Vision with Spotlights

Reveals high-fidelity details and color at night with the embedded spotlights.



### Customizable Block Zones

Set customizable block zones to keep private areas from being monitored.



### Local<sup>†</sup> and Cloud<sup>‡</sup> Storage

Save recorded videos to a microSD card (up to 512 GB)<sup>†</sup> or by using Tapo Care<sup>‡</sup> cloud storage services.



### Activity Zones

Set up your own activity zones to only receive alerts that matter.

<sup>†</sup>microSD card needs to be purchased separately. Actual storage capacity depends on the size of the microSD card used.

<sup>‡</sup>Subscribe for cloud storage at <https://www.tapo.com/tapocare/>

<sup>§</sup>Tapo C236 does not have an Ethernet port and can only be connected via Wi-Fi.

<sup>¶</sup>Compatible with Alexa and Google Assistant supported displays. User experience is dependent on the connected device's specifications.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.


©2025 TP-Link

## // Specifications

|               |                    |  |
|---------------|--------------------|--|
| Camera        | Image Sensor       | 1/2.7" Progressive Scan CMOS Starlight Sensor  |
|               | Lens               | Focal Length: 4 mm $\pm$ 5%<br>Aperture: F1.6 $\pm$ 5%<br>Field of View: 105° (Diagonal), 88° (Horizontal), 46° (Vertical) |
|               | Night Vision       | 850 nm IR LED (40 ft / 12 m), Color Night Vision   |
|               | Day/Night Switch   | IR-Cut Filter with Auto-Switching  |
|               | Lighting           | Spotlights   |
|               | Interface & Button | 1× RESET Button<br>1× microSD Card Slot (Up to 512 GB)   |
| Video & Audio | Maximum Resolution | 2880 × 1620 px   |
|               | Frame Rate         | 30 fps   |
|               | Digital Zoom       | /  |
|               | Video Compression  | H.264  |
|               | Live View          | Yes  |
|               | Image Enhancement  | 3DNR<br>WDR  |

|                          |                       |   |
|--------------------------|-----------------------|---|
| Video & Audio            | Audio Input & Output  | Built-in Microphone and Speaker   |
|                          | Audio Communication   | Two-Way Audio with Noise Cancellation   |
|                          | Siren Volume          | 99 dB (Level measured at 4-inch/10-cm distance)   |
| Storage                  | Local Storage         | microSD Card Slot on Camera (Up to 512 GB)  |
|                          | Cloud Storage         | Tapo Care Cloud Storage Services (Subscription required)  |
| Detection & Notification | AI Detection          | Motion detection<br>Person detection<br>Tamper detection<br>Baby Cry detection<br>Pet Detection<br>Vehicle Detection<br>Line-Crossing Detection |
|                          | Activity Zones        | Yes   |
|                          | Output Notification   | System Notification<br>System Notification with Snapshot (Tapo Care Services)   |
| Network                  | Network Connectivity  | Connect via Wi-Fi   |
|                          | Wireless Connectivity | IEEE 802.11b/g/n, 2.4 GHz Wi-Fi   |
|                          | Transmission Rate     | 11b: 11 Mbps<br>11g: 54 Mbps<br>11n: 72.2 Mbps  |

|          |                           |   |
|----------|---------------------------|---|
| Network  | Protocol                  | TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP                                     |
|          | Ethernet Port             | /   |
|          | RTSP                      | Yes   |
|          | ONVIF                     | Yes   |
| Security | Security                  | On-Device Machine Learning<br>128-bit AES Encryption with SSL/TLS<br>WPA/WPA2-PSK |
| Power    | Power Source              | 5 V DC Power Adapter  |
|          | Input Voltage             | 100-240 V, 50/60 Hz   |
|          | Output Voltage            | 5.0 V, 1.0 A (Type-A Port)  |
|          | Power Cable               | USB Type-A to Type-C Cable  |
|          | Power Cable Length        | 2 m   |
|          | Typical Power Consumption | 3.4 W   |
|          | Maximum Power Consumption | 4.7 W   |
| General  | Smart Integration         | Google Assistant, Amazon Alexa, Samsung SmartThings                               |
|          | Weather Resistance        | IP65  |
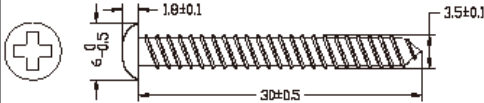
|         |                       |   |
|---------|-----------------------|---|
| General | Mounting Options      | Tabletop<br>Wall-Mounted<br>Ceiling-Mounted<br>Pole-Mounted   |
|         | Operating Temperature | -20 °C ~ 50 °C (-4 °F ~ 122 °F)   |
|         | Storage Temperature   | -40 °C ~ 60 °C (-40 °F ~ 140 °F)  |
|         | Operating Humidity    | 10% ~ 90% RH, Non-condensing  |
|         | Storage Humidity      | 0 ~ 90% RH, Non-condensing  |
|         | Mounting Screw Size   |   |
|         | Dimensions            | 4.15 × 3.06 × 2.75 in (105.3 × 77.8 × 69.8 mm)  |
|         | Weight                | 7.76 oz / 220 g   |
|         | Package Contents      | Tapo C236 Camera × 1<br>Mounting Bracket × 1<br>Mounting Template Sticker × 1<br>Mounting Anchors × 4<br>Mounting Screws × 4<br>Power Adapter × 1<br>2 m USB Adapter Cable × 1<br>Quick Start Guide |