

## Solar System Controller

MODEL: VIGI PS20



## Overview

With a 20.8Ah/10.8V high-capacity battery, this solar system controller delivers constant power to outdoor equipment such as network bridges and cameras. Perfect for areas where network and power deployment is tough, it eradicates wiring hassles and cuts investment costs.

## Highlight

### Smart Battery Delivers Optimal Performance

The built-in smart battery supports intelligent auxiliary heating technology, which allows the battery to operate normally across a wide temperature range.

### High System Stability, All-Weather Operation

The horizontal mount is made of high-quality SGCC galvanized steel with increased strength, anti-corrosion, and rust resistance. The solar panel is fringed with high-quality aluminum, and 3.2mm tempered glass covers the surface to increase impact resistance.


### IP66 Weatherproof

Ensures reliable performance even in harsh environments with rain and dust, reducing subsequent maintenance costs.


### Remote Management

Monitor power statistics, get instant intrusion and low-battery alerts, update firmware, and reboot the system via the mobile app. The smart controller conducts real-time self-diagnostics and auto-restarts upon detecting faults, eliminating manual onsite troubleshooting. Enjoy peace of mind, no matter your location.




## Network Topology

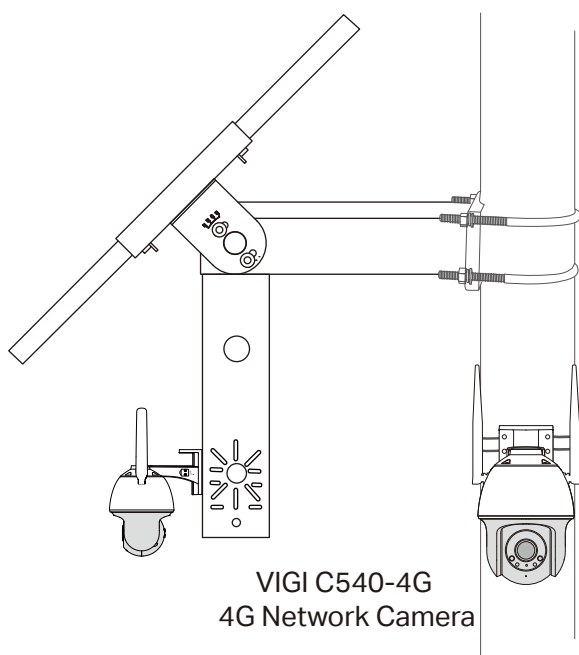

Or

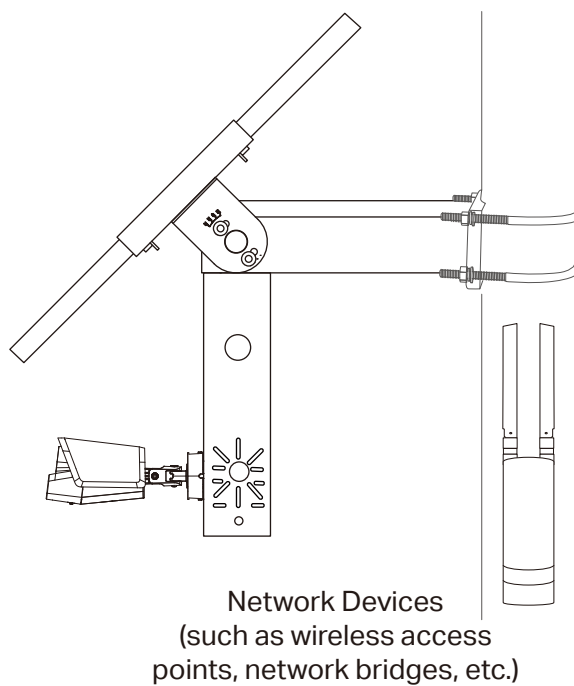


# Build Features

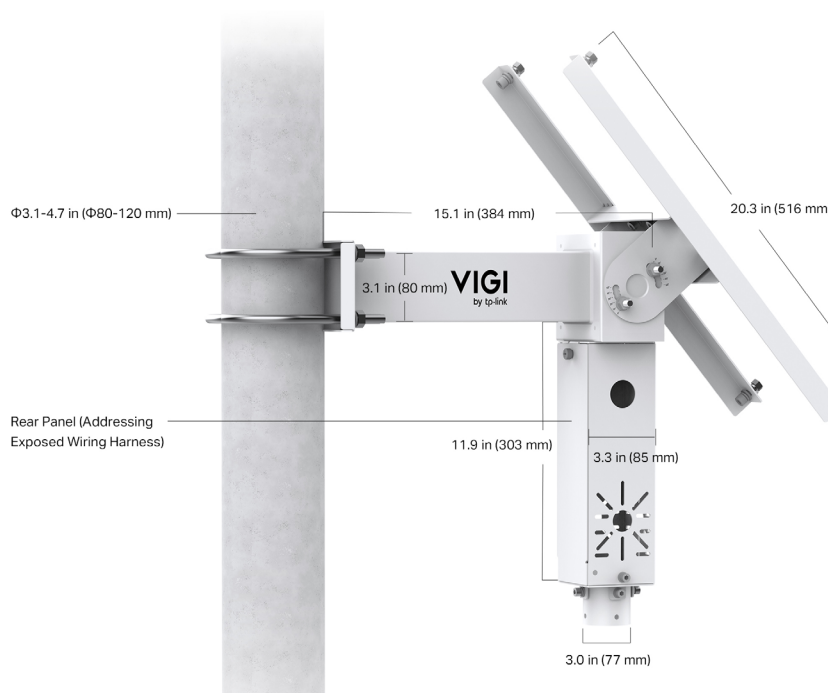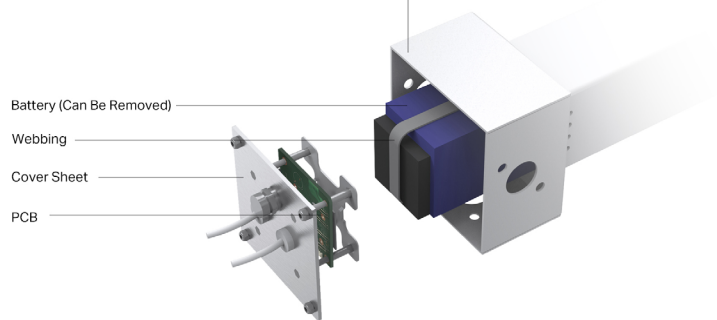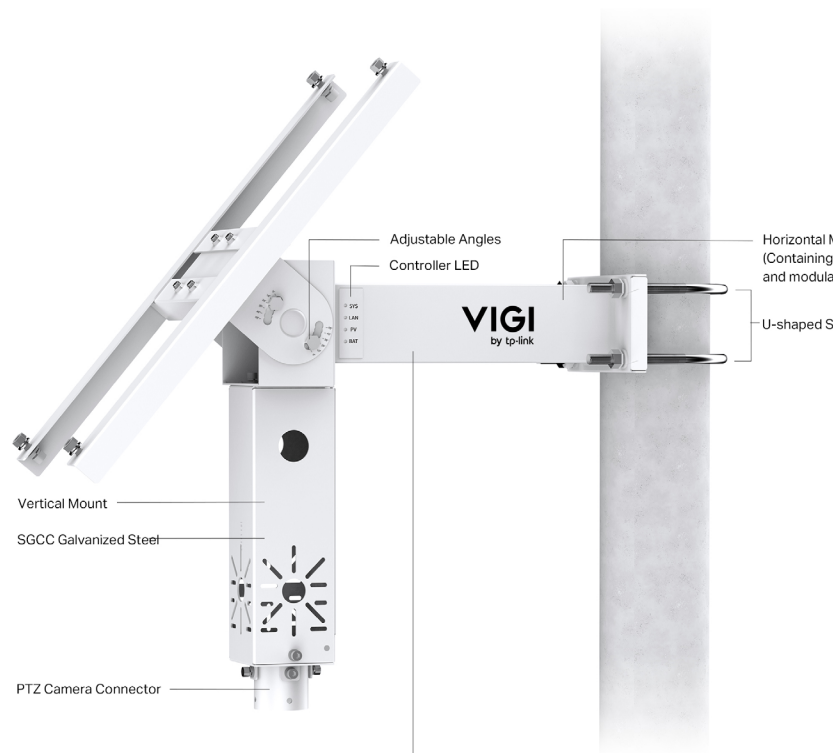

# Specifications

| Solar System Controller               |   |
|---------------------------------------|---|
| Product Model                         | VIGI PS20   |
| Battery                               |   |
| Type                                  | Lithium   |
| Intelligent Auxiliary Heat            | Yes   |
| Voltage                               | 10.8V   |
| Battery Capacity                      | 20.8Ah  |
| Max. Output Voltage                   | 12.6V   |
| Life                                  | More than 500 cycles <sup>Δ</sup>   |
| Dimension                             | 9.5 × 2.8 × 2.6 in (242 × 70 × 65 mm)   |
| Charging Condition                    | <ul style="list-style-type: none"><li>• 0°C to 45°C (32 °F to 113 °F)</li><li>• -30°C to 45°C (-22 °F to 113 °F) (With intelligent auxiliary heating)</li></ul>                           |
| Discharging Condition                 | <ul style="list-style-type: none"><li>• -20°C to 60°C (-4 °F to 140 °F)</li><li>• -30°C to 60°C (-22 °F to 140 °F) (With intelligent auxiliary heating)</li></ul>                         |
| Hardware                              |   |
| Interface                             | <ul style="list-style-type: none"><li>• 1× 10/100 Mbps RJ45</li><li>• 1× Photovoltaic Panel Connector</li><li>• 3× 5.5mm DC Power Plugs (#1, #2: 9V-12.6 VDC/2A, #3: 12 VDC/2A)</li></ul> |
| Indicator LED                         | <ul style="list-style-type: none"><li>• Quantity: 4 (1× SYS Indicator, 1× LAN Indicator, 1× PV Indicator, 1× BAT Indicator)</li><li>• Color: Blue</li></ul>                               |
| Software Feature                      |   |
| Load Control                          | Yes   |
| High and Low Temperature Protection   | Yes   |
| Overdischarge Protection              | Yes   |
| Power Consumption Statistics          | Yes   |
| Displays Real-time Load Status        | Yes   |
| Battery Level Display                 | Yes   |
| Time Zone Selection                   | Yes   |
| Region Selection                      | N/A   |
| Schedule Saving                       | Yes   |
| Firmware Remote Update                | Yes   |
| Remote Reboot                         | Yes   |
| Local LAN Management                  | Yes   |
| Intelligent Auxiliary Heating Control | -30°C to 5°C (-22 °F to 41 °F)  |
| Account Management                    | Yes   |
| Remote Reset                          | Yes   |
| Remote Reboot                         | Yes   |
| Remote Message Push                   | Yes   |
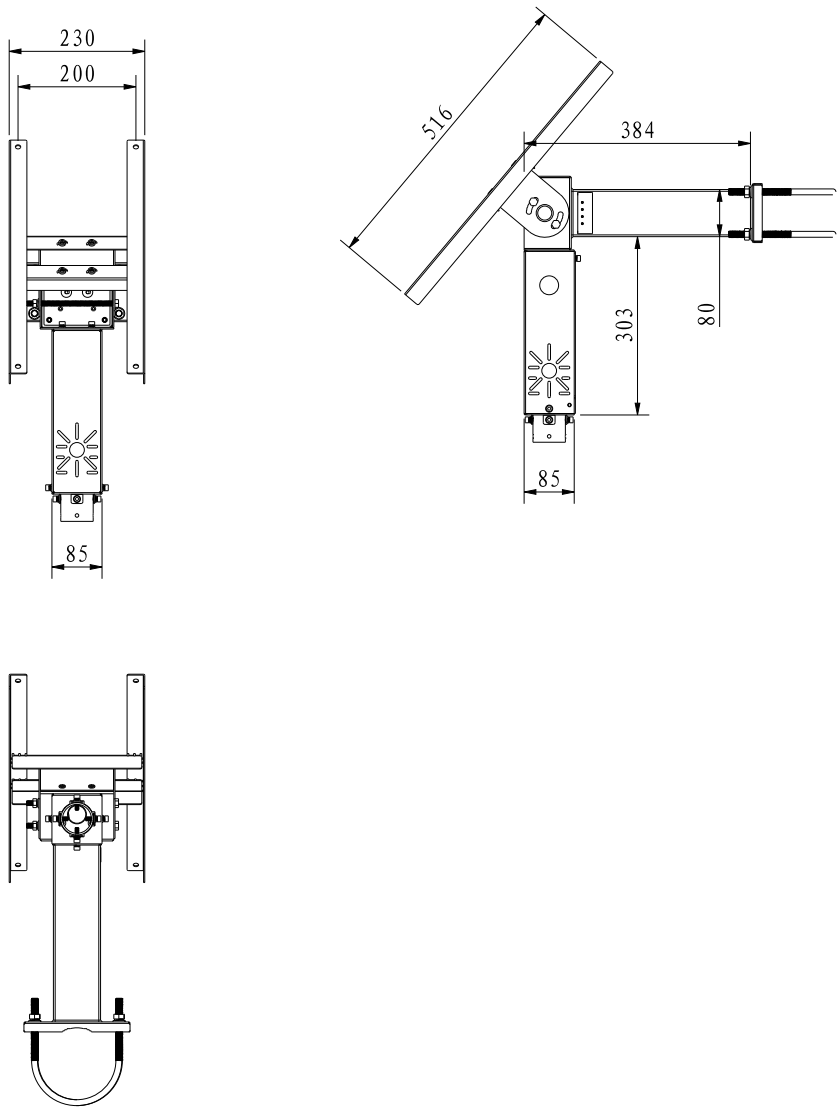
| Others   |   |
|--|---|
| Certification  | <ul style="list-style-type: none"> <li>• CB, PSE (Battery)</li> <li>• CE, KC, FCC, IP66, VCCI, BSMI</li> </ul>  |
| Environment  | <ul style="list-style-type: none"> <li>• Operating Temperature: -30°C to 60°C (-22 °F to 140 °F) (With intelligent auxiliary heating)</li> <li>• Operating Humidity: 10%~90%RH, Non-condensing</li> </ul> |
| Box Dimensions (W X D X H)   | 22.4 × 12.2 × 9.0 in (570 × 310 × 230 mm)   |
| Package Weight   | Package Weight: 11.2 kg   |
| Package Contents   | <ul style="list-style-type: none"> <li>• VIGI Solar System Controller</li> <li>• Quick Start Guide</li> <li>• Waterproof Cable Attachments</li> <li>• Mounting Accessories</li> </ul>                     |
| Dimensions   |   |
|  <p>The image contains three technical drawings of the VIGI Solar System Controller. The top-left drawing is a front view showing a width of 230 mm and a mounting bracket width of 200 mm. The bottom-left drawing is a side view showing a height of 85 mm. The right-side drawing is a top view showing a diagonal length of 516 mm, a horizontal distance of 384 mm, a vertical distance of 303 mm, a mounting bracket width of 80 mm, and a base width of 85 mm.</p> |   |

△ A cycle represents one full charge and discharge. Based on 30Ah capacity with VIGI C540-4G, 500 cycles approximate a 10-year lifespan. Specifications are subject to change without notice and can be found at [www.vigi.com](http://www.vigi.com). ©2025 TP-Link