


# Unmanaged Switch | Datasheet

## TL-SG705P

5-Port Gigabit Desktop Switch with 4-Port PoE+

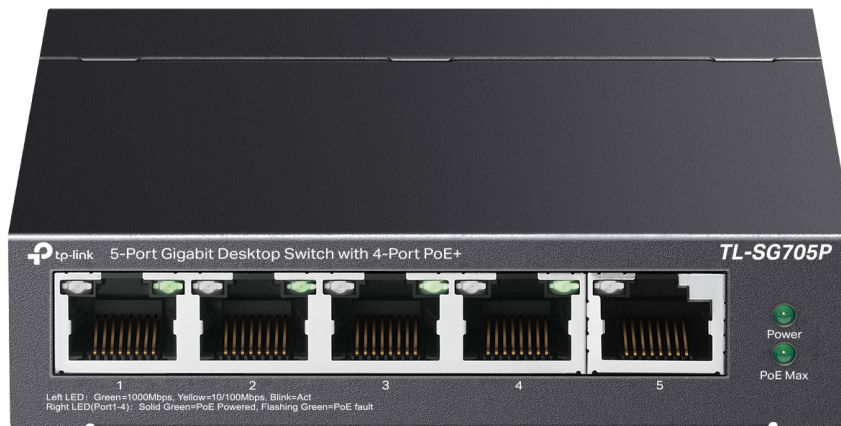

### Highlights

- 5× 10/100/1000 Mbps RJ45 ports
- With four PoE+ ports, transfers data and power on one single cable
- Works with IEEE 802.3af/at compliant PDs
- 802.1p/DSCP QoS enable smooth latency-sensitive traffic
- Supports PoE Power up to 30 W for each PoE port
- Supports PoE Power up to 65 W for all PoE ports\*
- Up to 250m data and power transmitting range under Extend Mode\*\*
- PoE Auto Recovery guarantees stable operation of PoE devices by automatically rebooting the dropped or unresponsive PD devices
- Plug and Play, no configuration and installation required

# Product Pictures



# Specifications

Model	TL-SG705P
Standards	IEEE 802.3, IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1p, IEEE 802.3af, IEEE 802.3at
Interface	<ul style="list-style-type: none"><li>• 5*10/100/1000 Mbps RJ45 Ports with 4 PoE+ Ports (Port 1 to Port 4)</li><li>• AUTO Negotiation/AUTO MDI/MDIX</li></ul>
Network Media (Cable)	<ul style="list-style-type: none"><li>• 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)</li><li>• 100BASE-TX: UTP category 5 or above cable (maximum 100m)</li><li>• 1000BASE-T: UTP category 5e or above cable (maximum 100m)</li></ul>
Max Power Consumption	74.54 W (220 V/50 Hz, with 65 W PD connected)
Max Heat Dissipation	254.18 BTU/h (with 65 W PD connected)
PoE Ports (RJ45)	PoE Standard: 802.3 af/at PoE Ports: 1-4, up to 30 W per port PoE Power Budget: 65 W
Transmission Method	Store-And-Forward
Packet Forwarding Rate	7.44 Mbps
Switch Capacity	10 Gbps
MAC Address Table	2K
Packet Buffer Capacity	1 Mbit

Model	TL-SG705P
Jumbo Frame	16 KB
Extend Mode	For Ports 1-2
PoE Auto Recovery	For Ports 1-4
Advanced Features	<ul style="list-style-type: none"><li>• Compatible With IEEE 802.3af/at Compliant PDs</li><li>• Mac Address Auto-Learning And Auto-Aging</li><li>• IEEE 802.3x Flow Control</li><li>• 802.1p/DSCP QoS</li><li>• IGMP Snooping</li><li>• Green Ethernet</li></ul>
Fan Quantity	Fanless
External Power Supply	External Power Adapter (Output: 53.5 VDC / 1.31 A)
Dimensions ( W x D x H )	3.9 x 3.9 x 1.0 in. (99.8 x 98 x 25 mm)
Certification	FCC, CE, RoHS
Package Contents	Switch, Power Adapter, Installation Guide
Operating Temperature	0°C to 40 °C (32 °F to 104°F )
Storage Temperature	-40 °C to 70 °C (-40 °F to 158°F )
Operating Humidity	10% to 90% non-condensing
Storage Humidity	5% to 90% non-condensing

Disclaimers

\*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

\*\*The speed of the ports in extend mode will downgrade to 10 Mbps. The actual transmission distance may vary due to the power consumption of PoE-powered devices or the cable quality and type.

www.tp-link.com

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2025 TP-Link